


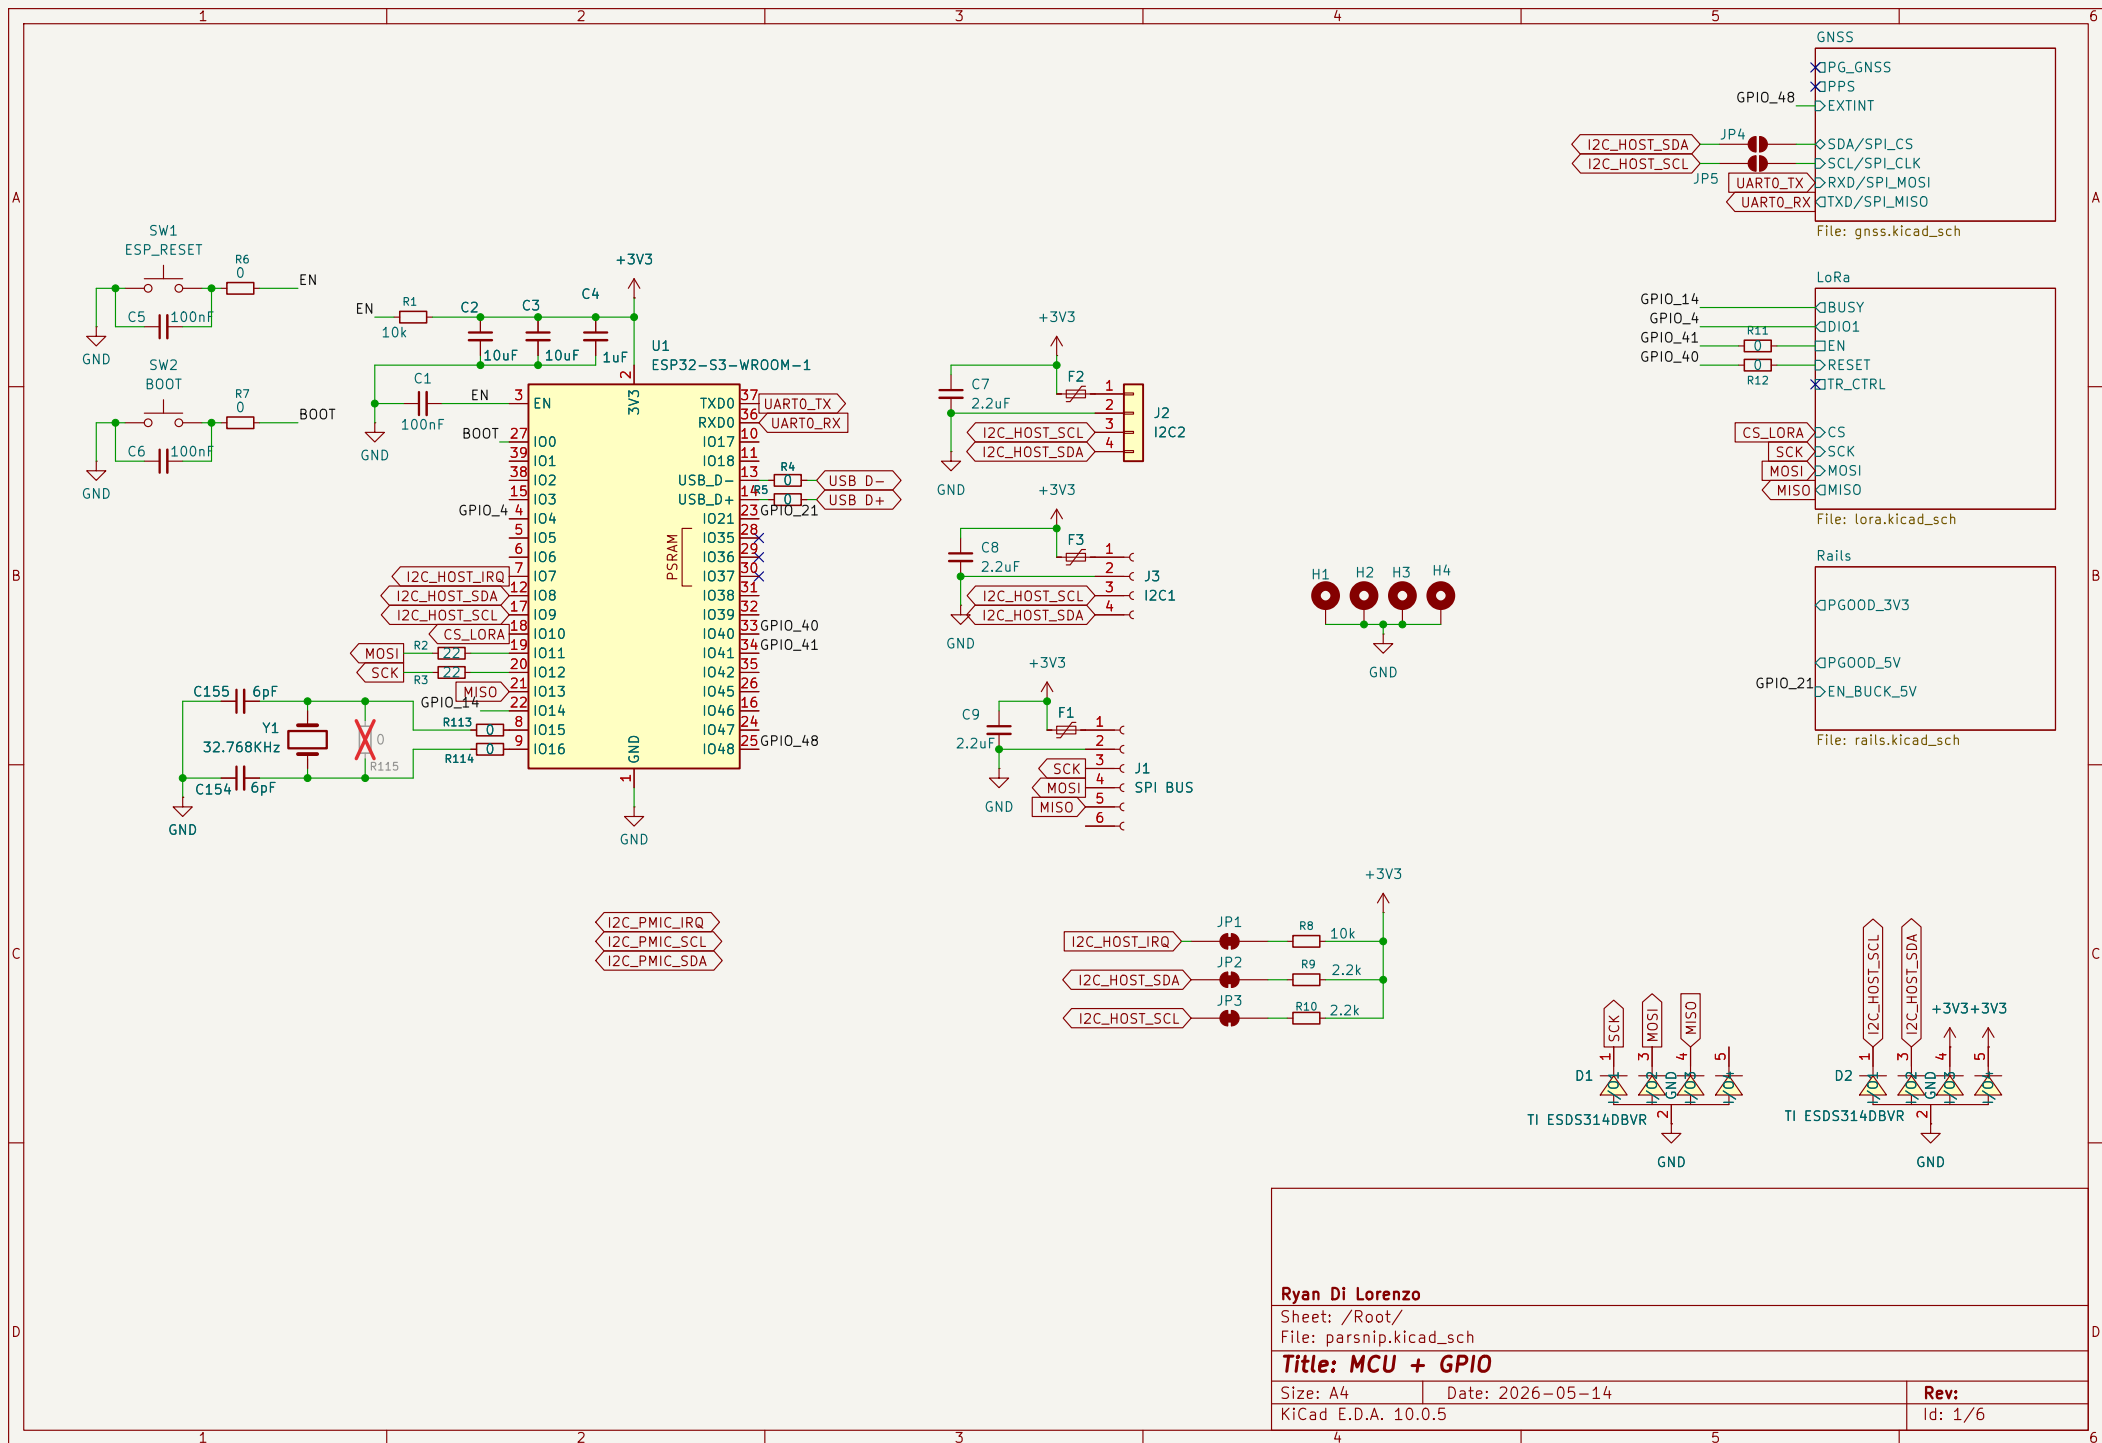

Ryan Di Lorenzo

Sheet: /Root/
File: parsnip.kicad_sch



Title: MCU + GPIO

Size: A4 Date: 2026-05-14
KiCad E.D.A. 10.0.5

Rev:
Id: 1/6


LEDs and Jumpers

High to enable I2C/UART, low to enable SPI

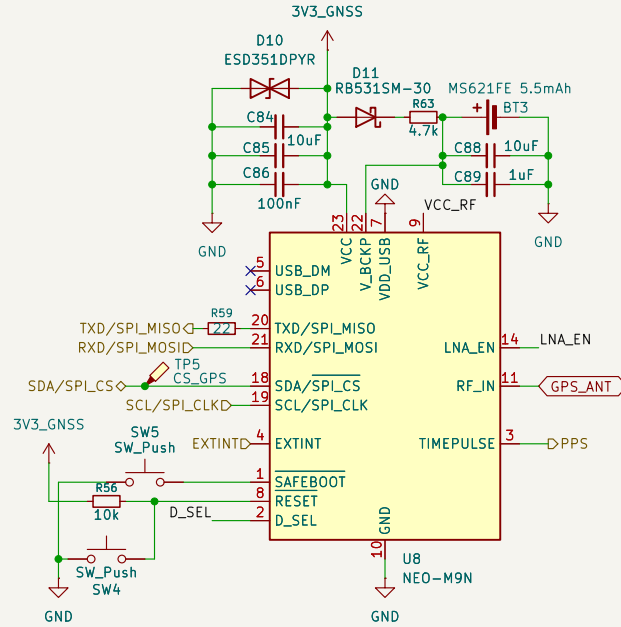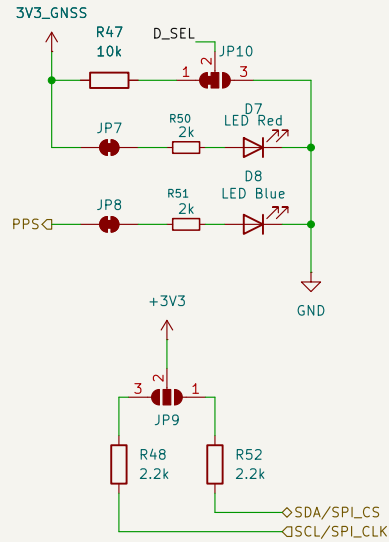


todo: switch module to use UART and not SPI
Theoretically compatible with NEO-M9N/M8N/M7N/M6N

Sparkfun Schematic: https://cdn.sparkfun.com/assets/1/0/a/8/a/SparkFun_GPS_NEO_M9N_SMA_UPDATE.pdf
U-Blox Datasheet: https://content.u-blox.com/sites/default/files/NEO-M9N_Integrationmanual_UBX-19014286.pdf

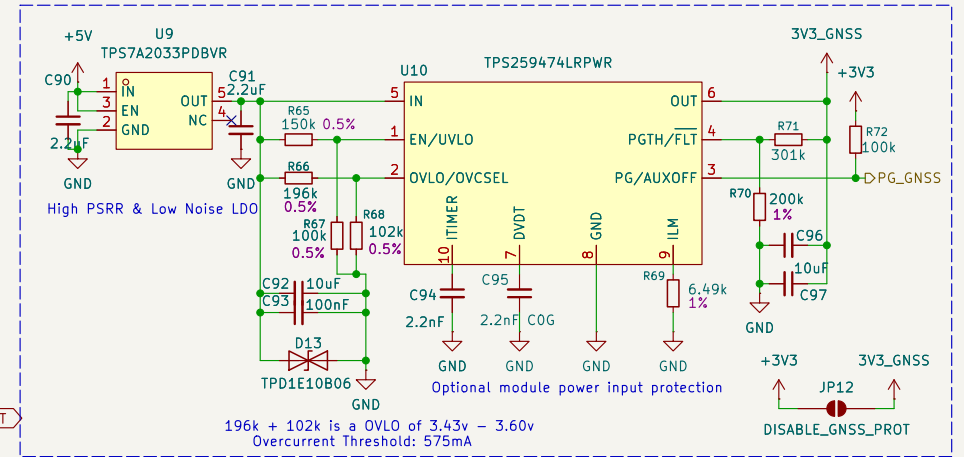

SMA + IPEX Connector

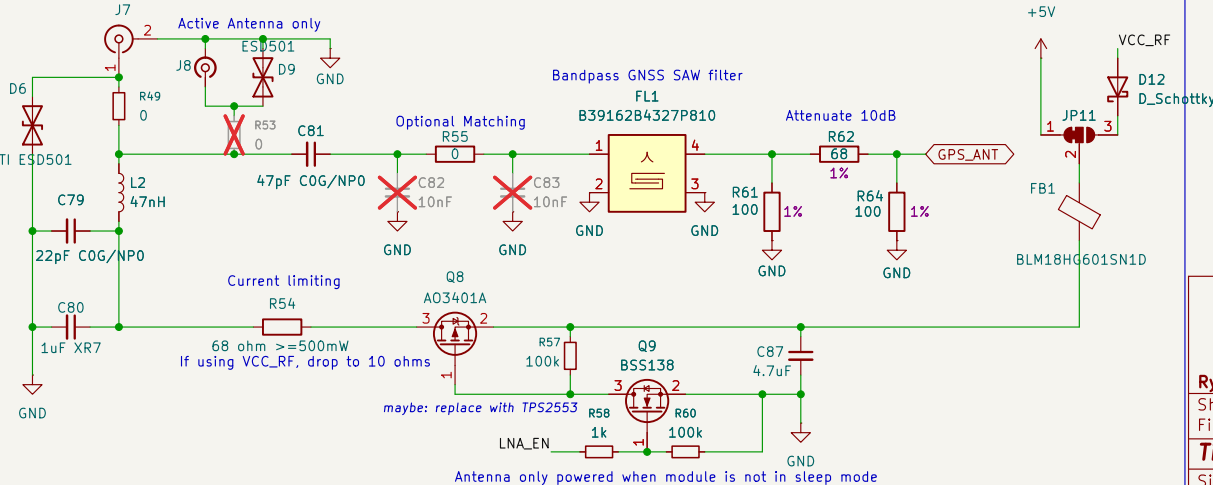

Ryan Di Lorenzo

Sheet: /Root/GNSS/

File: gnss.kicad_sch

Title: GNSS Module / Active RF Antenna

Size: A4 Date: 2026-05-14


KiCad E.D.A. 10.0.5

Rev:

Id: 5/6


Charge Controller

Capacitors voltage ratings specified, generally >25V – use XR7/COG

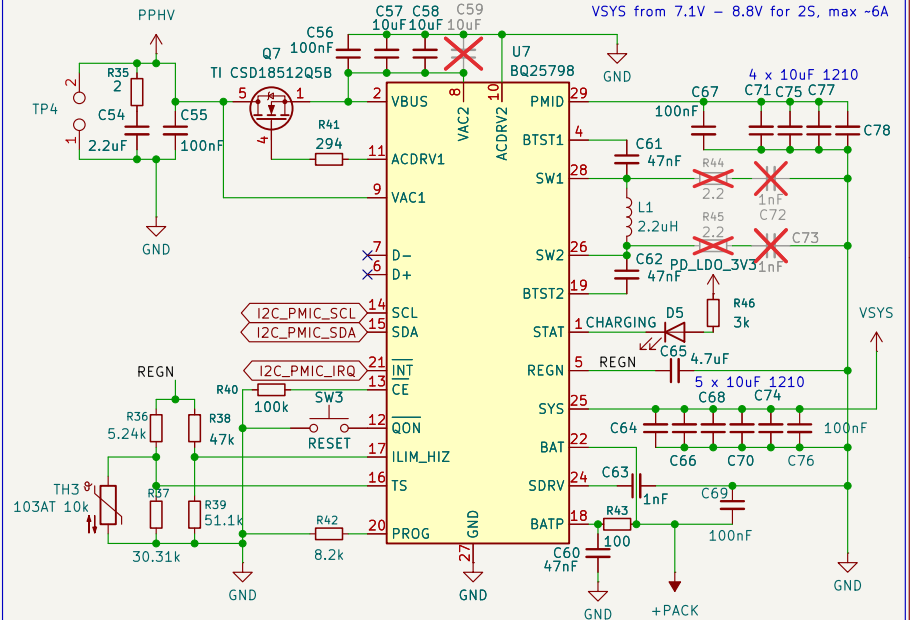

Battery Management System (BMS)

Capacitors voltage ratings specified, generally >25V – use XR7/COG

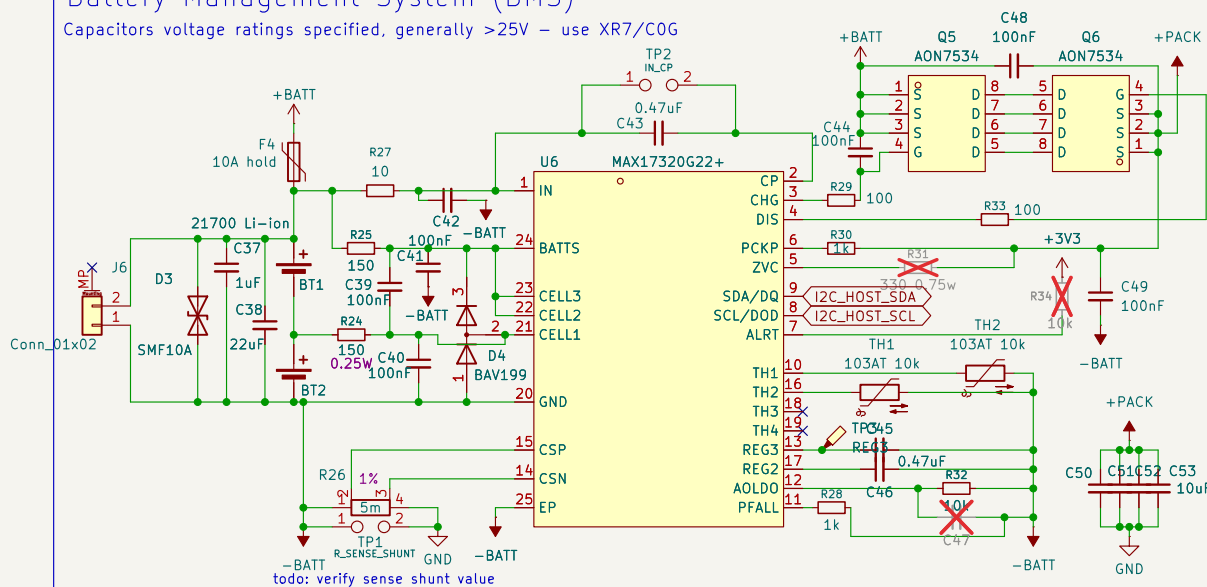

Ryan Di Lorenzo

Sheet: /Charger/

File: battery.kicad_sch

Title: Battery Charger / Battery Management System (BMS)

Size: A4

Date: 2026-05-14

Rev:

KiCad E.D.A. 10.0.5

Id: 3/6