

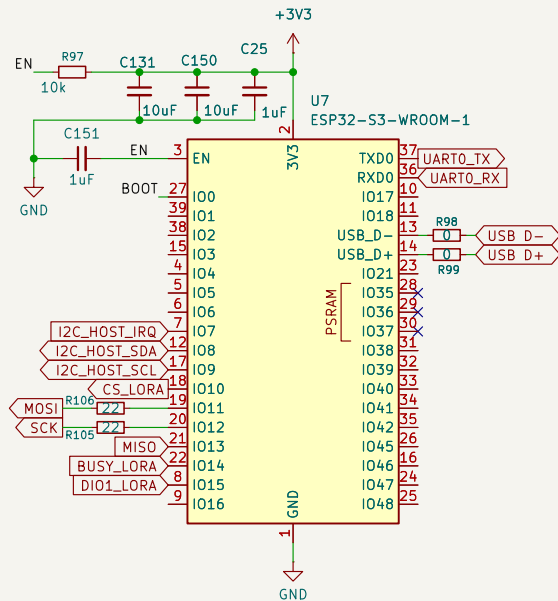
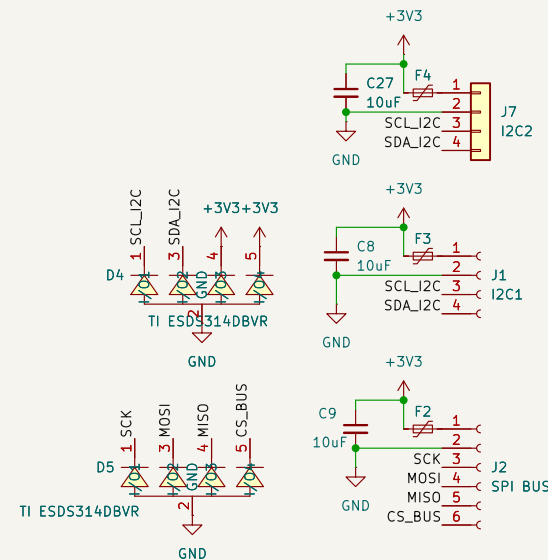







I2C_PMIC_IRQ
I2C_PMIC_SCL
I2C_PMIC_SDA



Ryan Di Lorenzo

Sheet: /Root/
File: parsnip.kicad_sch



Title: MCU + GPIO

Size: A4 Date: 2026-05-14
KiCad E.D.A. 10.0.5

Rev:
Id: 1/6


LEDs and Jumpers

High to enable I2C, low to enable SPI

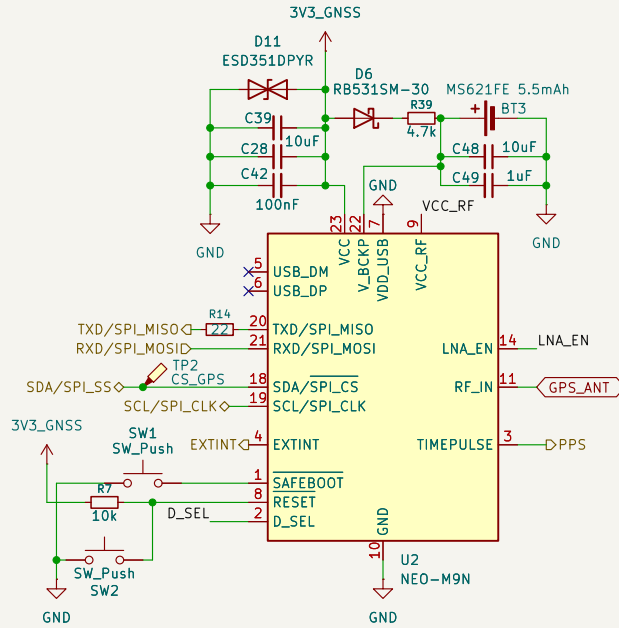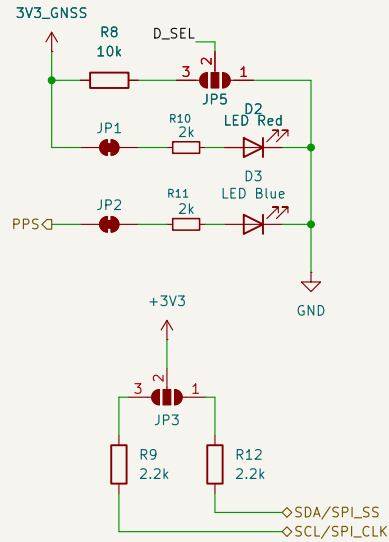


todo: switch module to use UART and not SPI
Theoretically compatible with NEO-M9N/M8N/M7N/M6N

Sparkfun Schematic: https://cdn.sparkfun.com/assets/1/0/a/8/a/SparkFun_GPS_NEO_M9N_SMA_UPDATE.pdf
U-Blox Datasheet: https://content.u-blox.com/sites/default/files/NEO-M9N_Integrationmanual_UBX-19014286.pdf

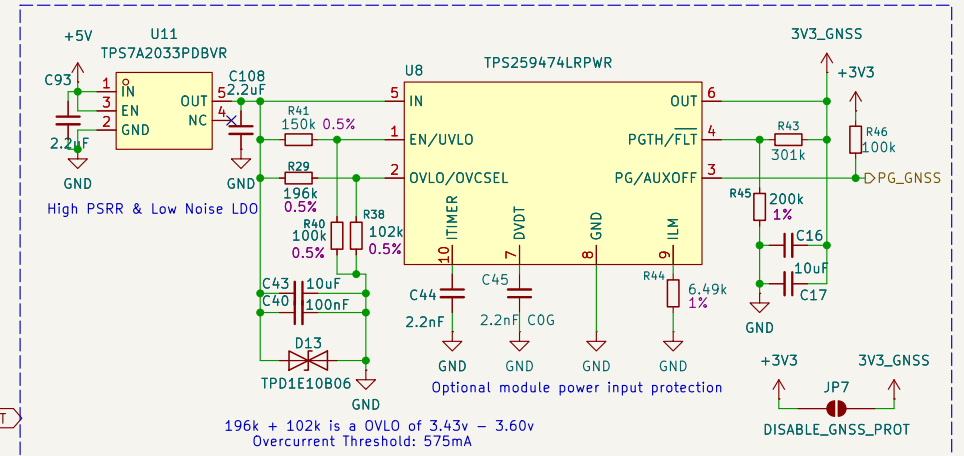

196k + 102k is a OVLO of 3.43v - 3.60v
Overcurrent Threshold: 575mA

SMA + IPEX Connector

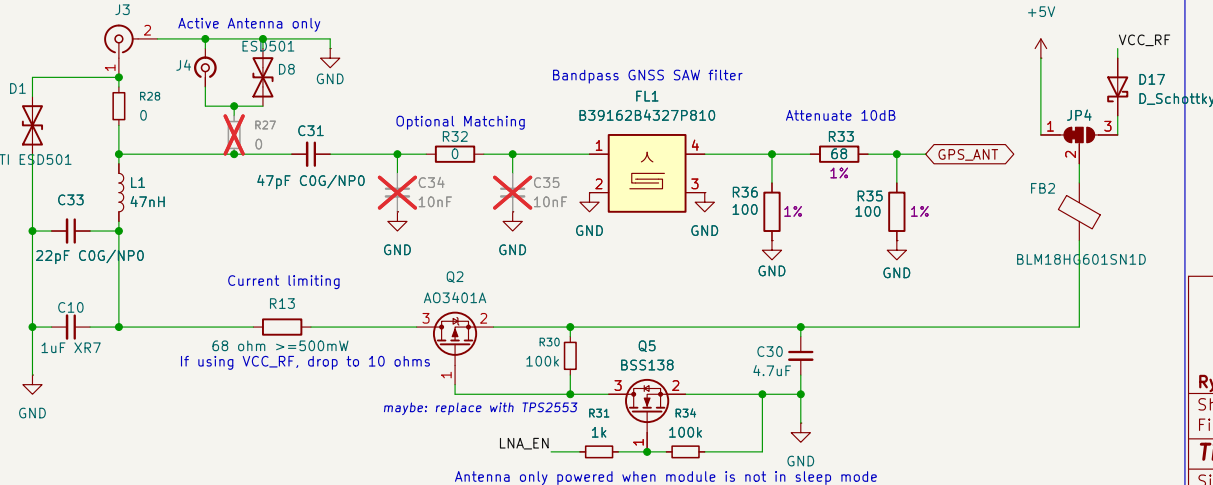

Ryan Di Lorenzo

Sheet: /Root/GNSS/

File: gnss.kicad_sch


Title: GNSS Module / Active RF Antenna

Size: A4 Date: 2026-05-14

KiCad E.D.A. 10.0.5

Rev:


Id: 5/6

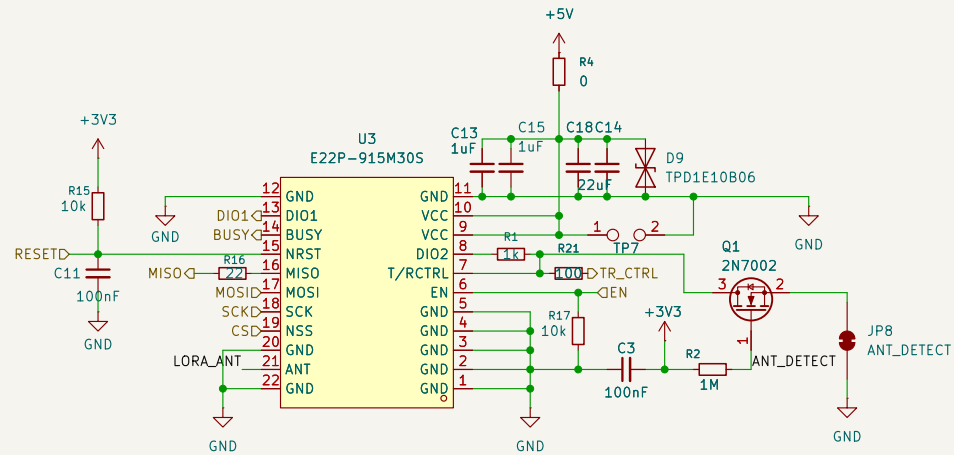

Ensure you set DIO2 as RF Switch in program
https://jgromes.github.io/RadioLib/class_s_x126x.html#ae46e08d579f4acbad029b4cd4f4ffaf

SMA Connector

DC—shorted antenna only unless JP8 is cut

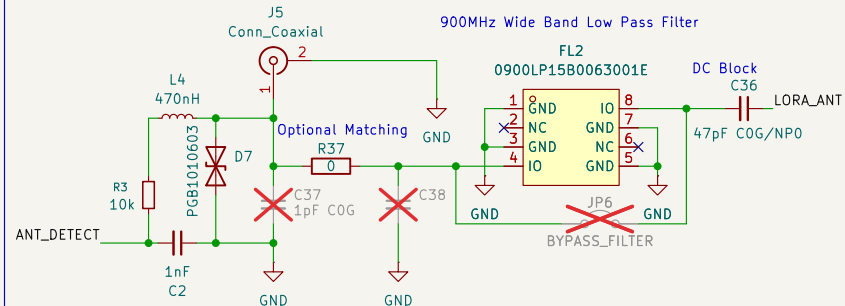

Ryan Di Lorenzo

Sheet: /Root/LoRa/

File: lora.kicad_sch


Title: LoRa Module / LoRa Antenna

Size: A4 Date: 2026-05-14

KiCad E.D.A. 10.0.5


Rev:

Id: 6/6

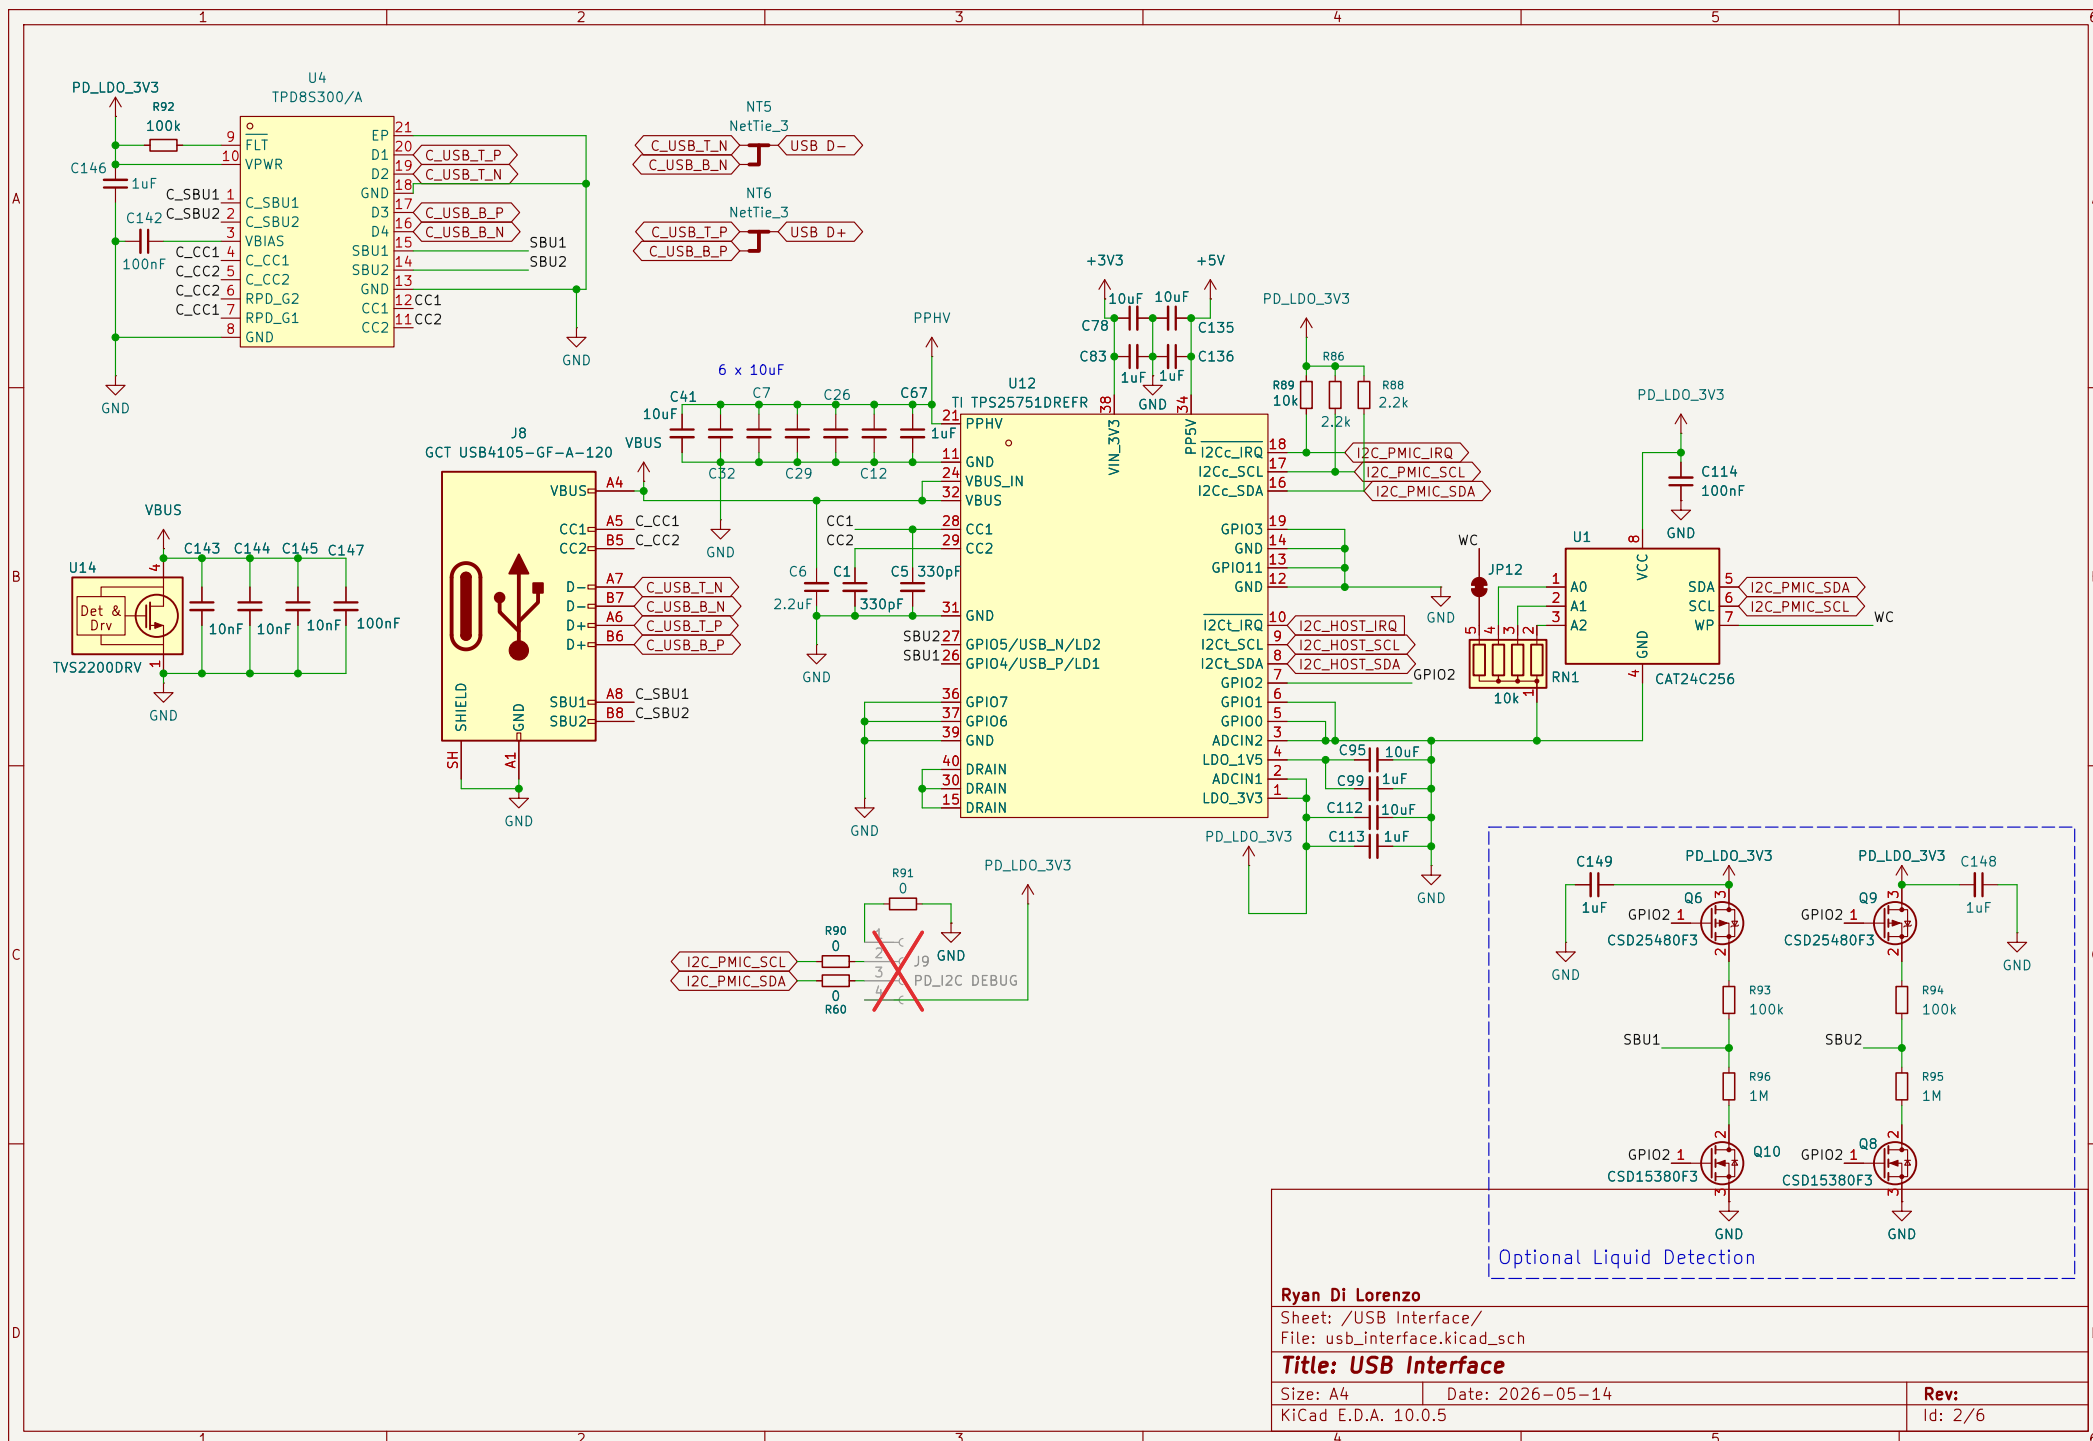


Charge Controller

Capacitors voltage ratings specified, generally >25V – use XR7/COG

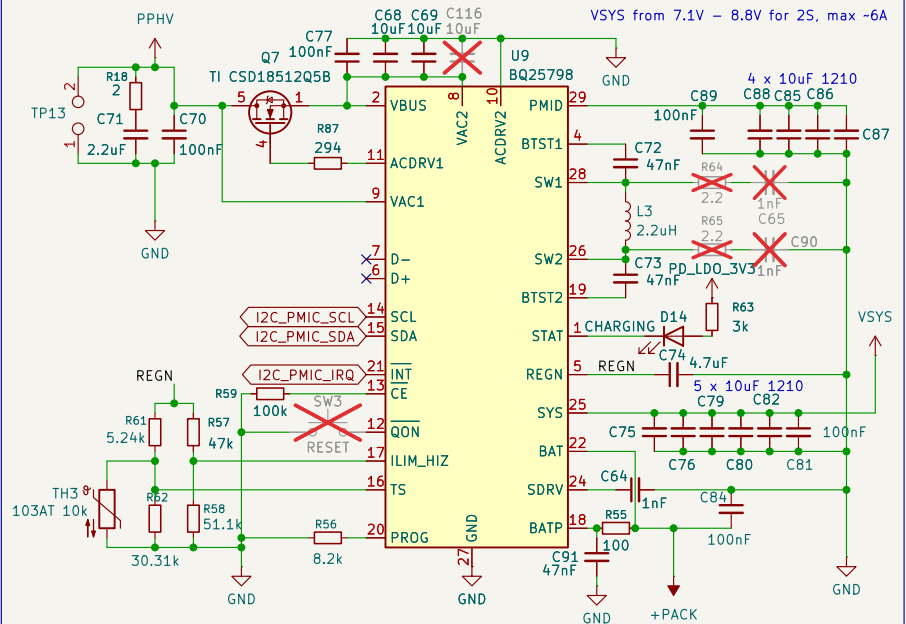

Battery Management System (BMS)

Capacitors voltage ratings specified, generally >25V – use XR7/COG

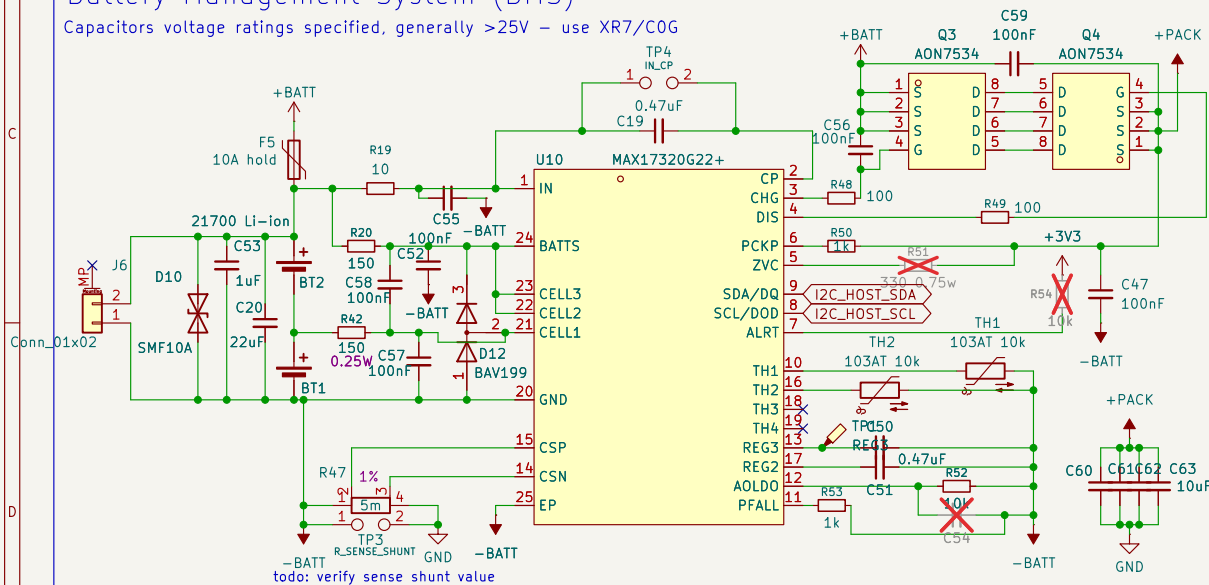

Ryan Di Lorenzo



Sheet: /Charger/
File: battery.kicad_sch

Title: Battery Charger / Battery Management System

Size: A4 Date: 2026-05-14

KiCad E.D.A. 10.0.5

Rev:
Id: 3/6

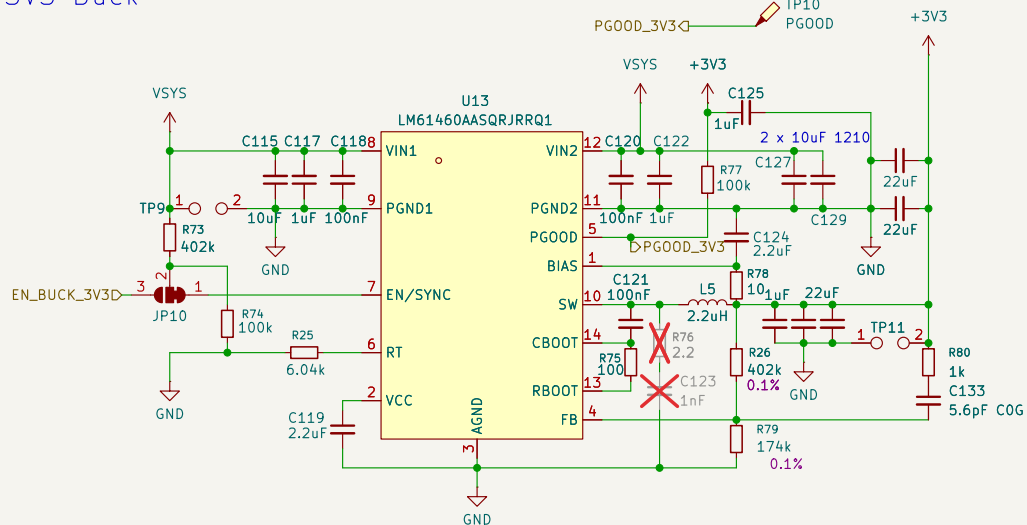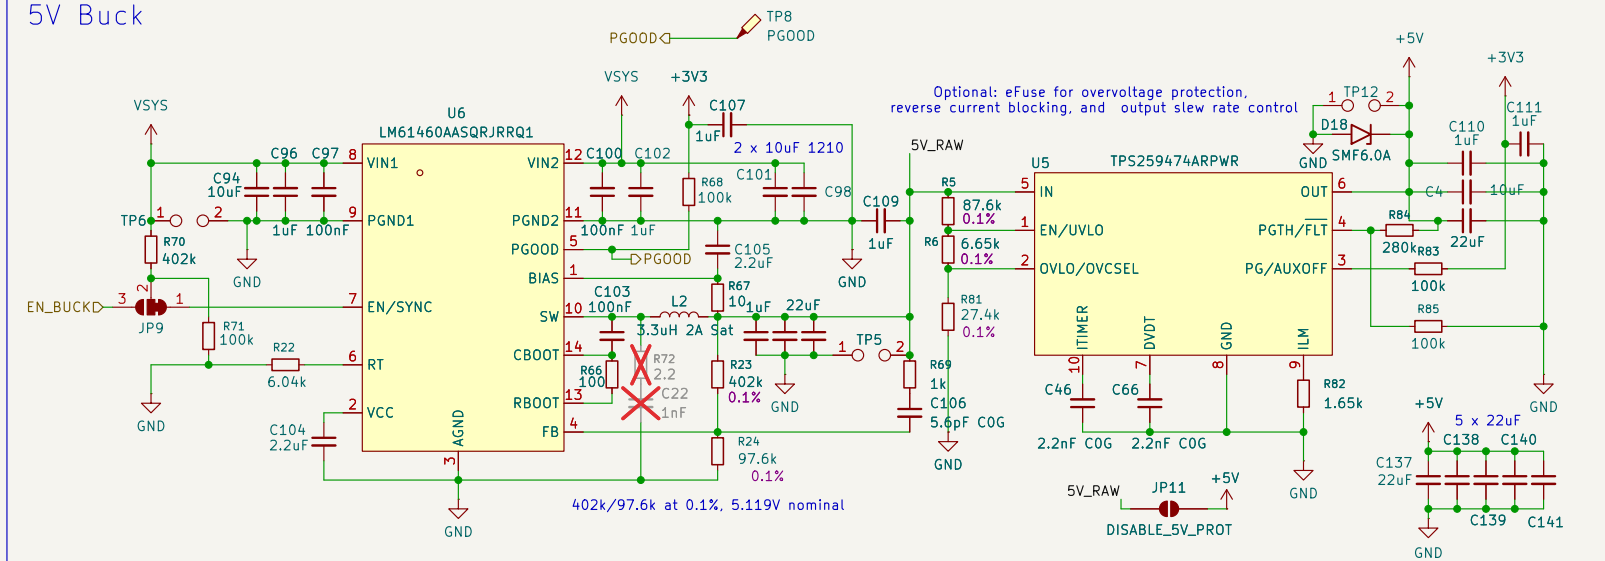

Rev:
Id: 4/6