

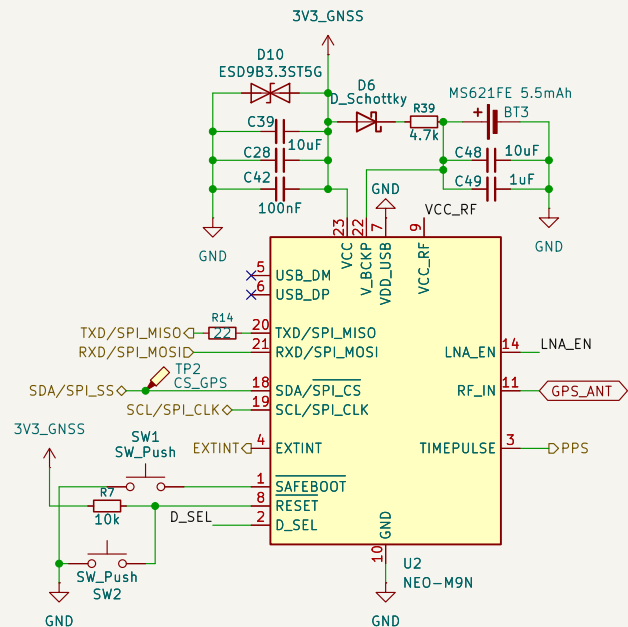


LEDs and Jumpers

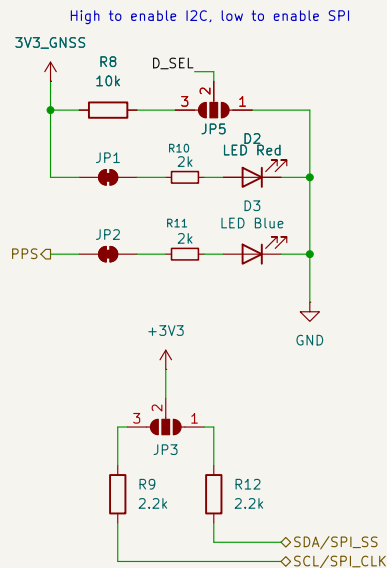


todo: switch module to use UART and not SPI
Theoretically compatible with NEO-M9N/M8N/M7N/M6N

Sparkfun Schematic: https://cdn.sparkfun.com/assets/1/0/a/8/a/SparkFun_GPS_NEO_M9N_SMA_UPDATE.pdf
U-Blox Datasheet: https://content.u-blox.com/sites/default/files/NEO-M9N_Integrationmanual_UBX-19014286.pdf

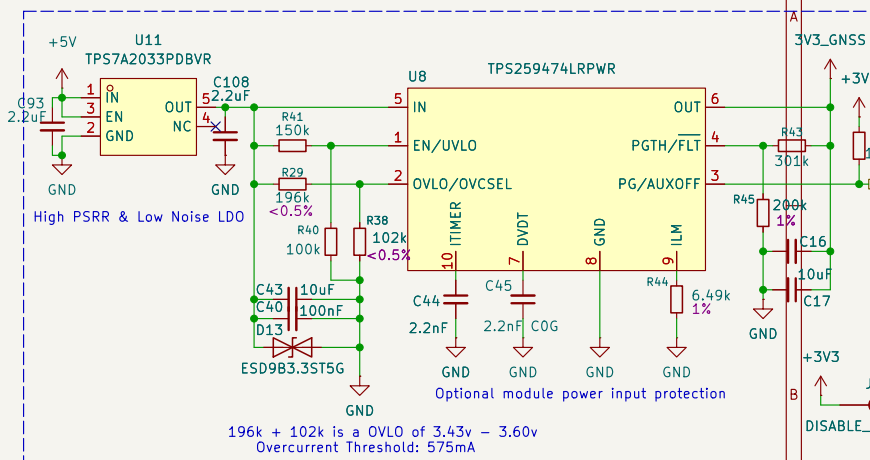

SMA + IPEX Connector

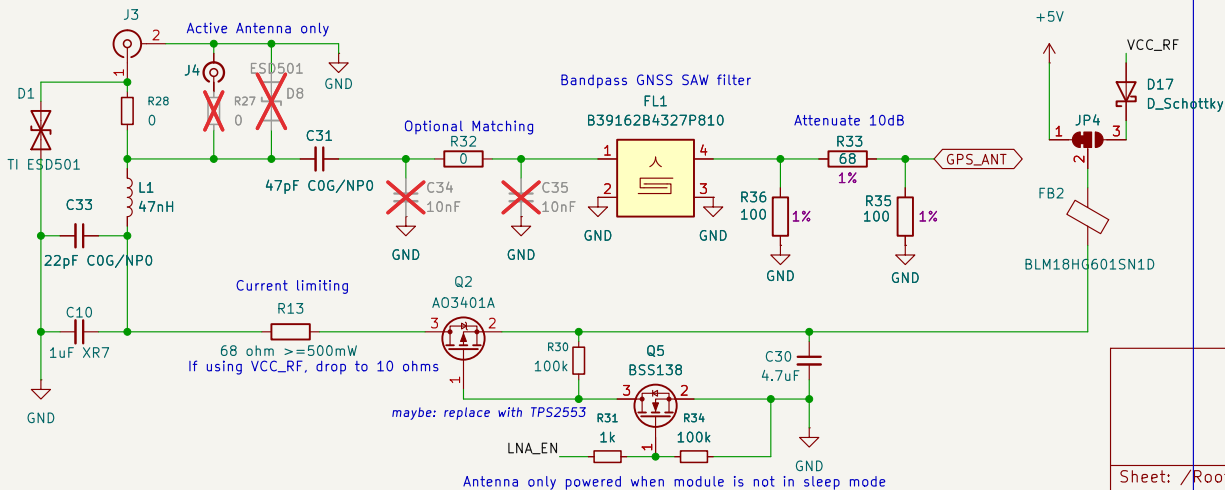


Sheet: /Root/GNSS/
File: gnss.kicad_sch

Title:


Size: A4
KiCad E.D.A. 10.0.5

Date: 2026-05-14


Rev:
Id: 4/5

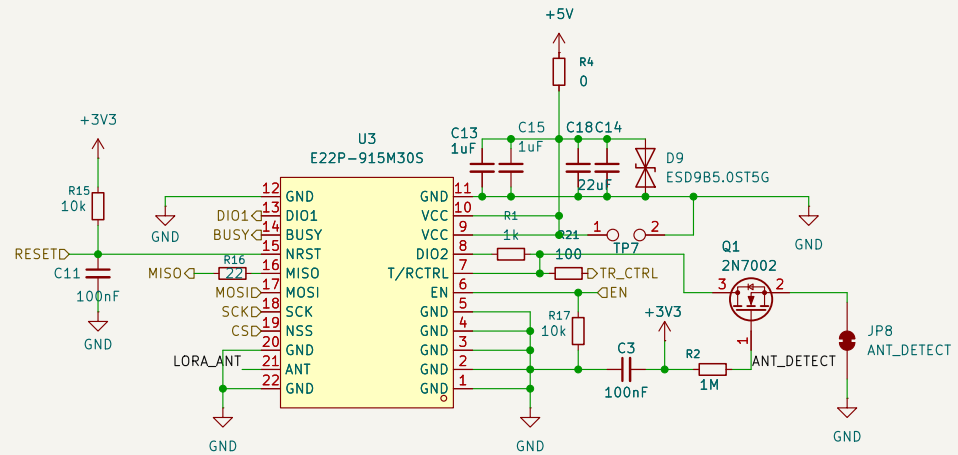


Ensure you set DIO2 as RF Switch in program
https://jgromes.github.io/RadioLib/class_s_x126x.html#ae46e08d579f4acbad029b4cd4f4ffaf

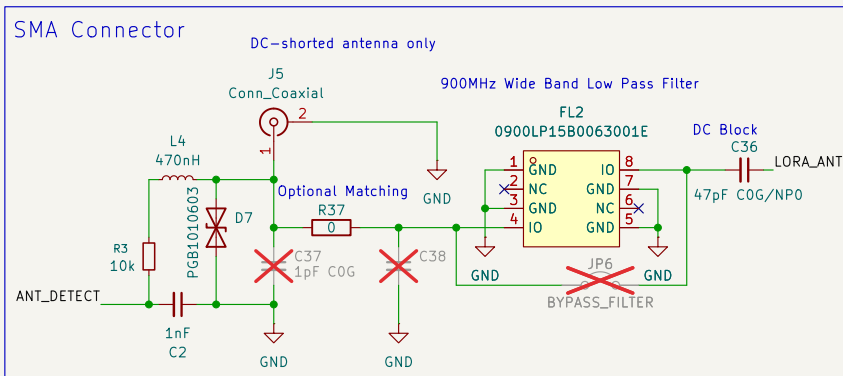


Sheet: /Root/LoRa/		
File: lora.kicad_sch		
Title:		
Size: A4	Date:	Rev:
KiCad E.D.A. 10.0.5		Id: 5/5

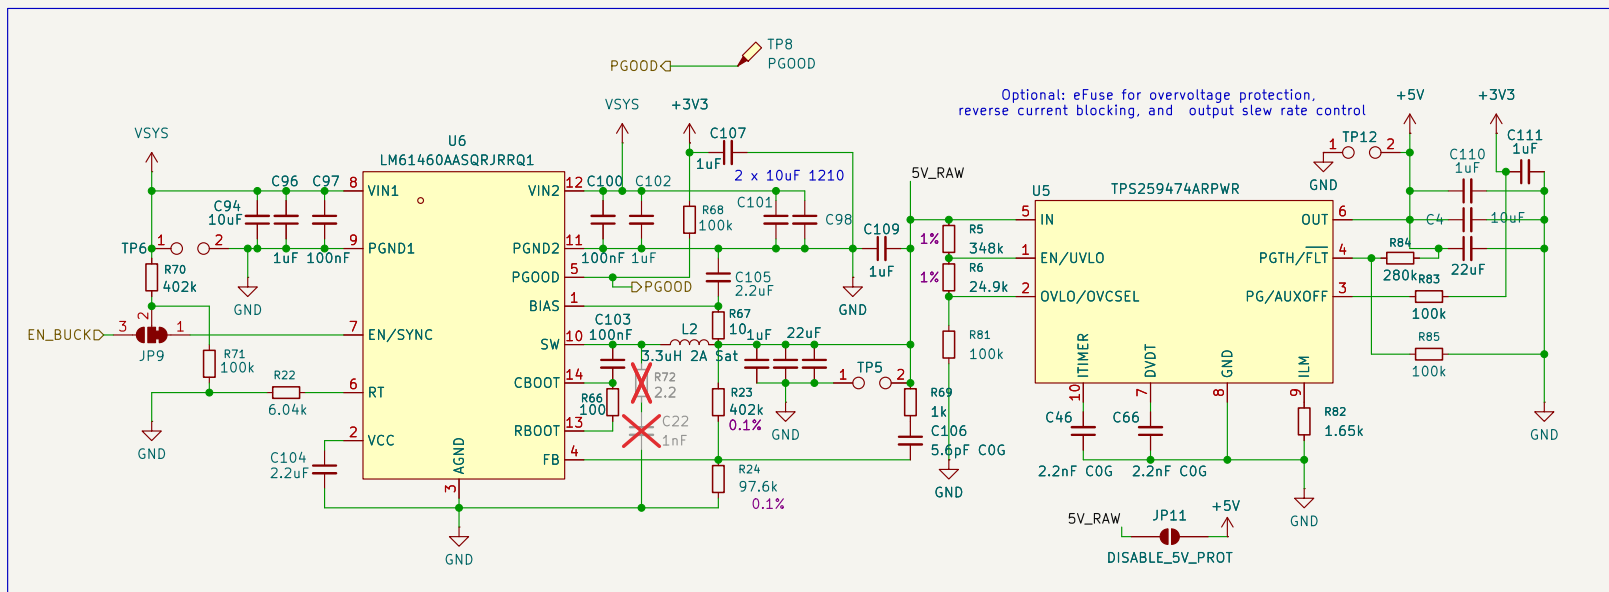

3V3 Buck

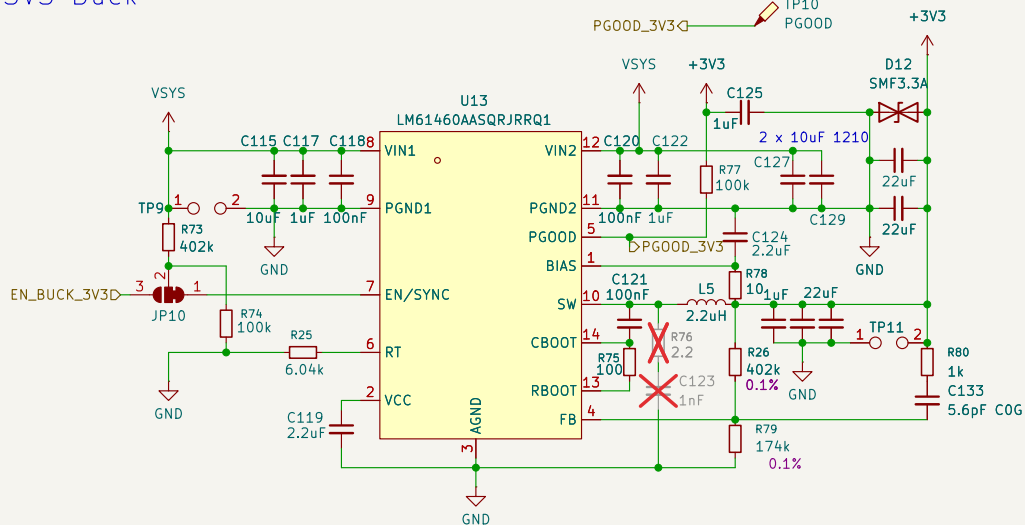

9V PD set



Sheet: /Rails/
File: rails.kicad_sch

Title:

Size: A4
KiCad E.D.A. 10.0.5


Date:

Rev:
Id: 2/5

Charge Controller


Capacitors voltage ratings specified, generally >25V – use XR7/COG

VSYS from 7.1V – 8.8V for 2S, max -6A

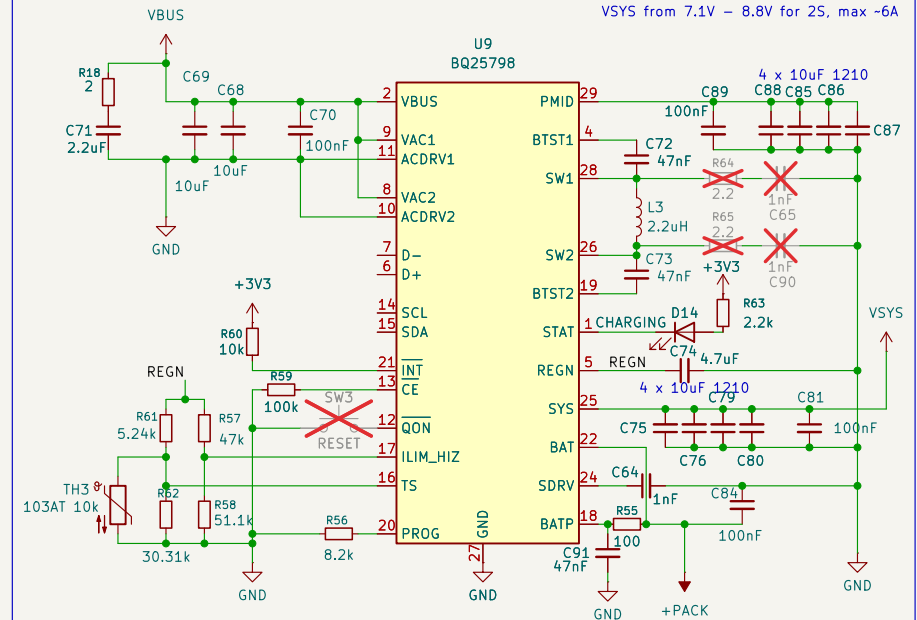

Battery Management System (BMS)

Capacitors voltage ratings specified, generally >25V – use XR7/COG

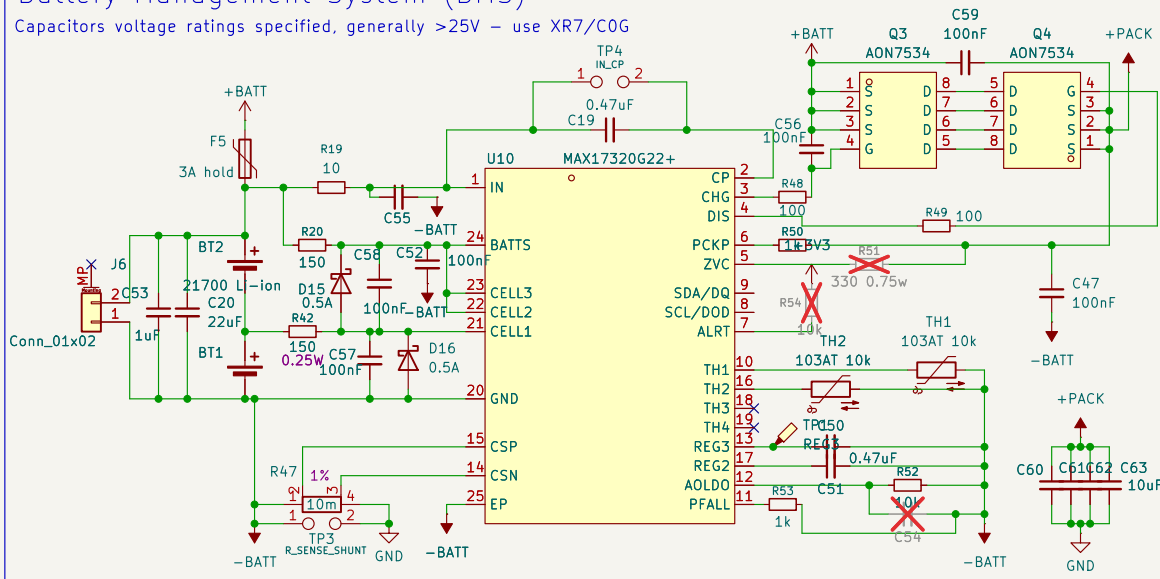

Sheet: /Charger/
File: battery.kicad_sch

Title:

Size: A4
KiCad E.D.A. 10.0.5

Date:

Rev:
Id: 3/5