
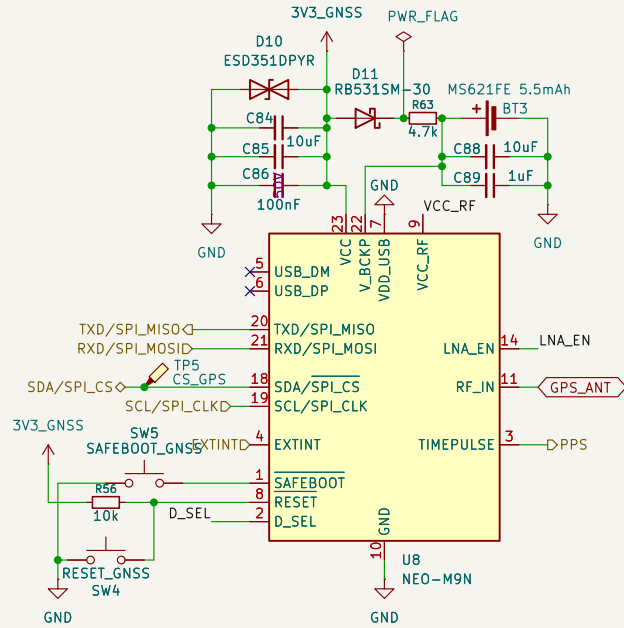



LEDs and Jumpers

High to enable I2C/UART, low to enable SPI

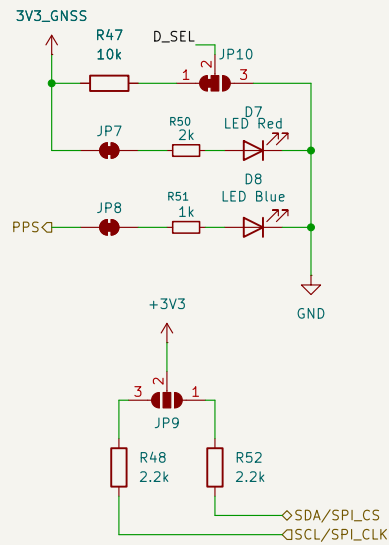


todo: switch module to use UART and not SPI
Theoretically compatible with NEO-M9N/M8N/M7N/M6N

Sparkfun Schematic: https://cdn.sparkfun.com/assets/1/0/a/8/a/SparkFun_GPS_NEO_M9N_SMA_UPDATE.pdf
U-Blox Datasheet: https://content.u-blox.com/sites/default/files/NEO-M9N_Integrationmanual_UBX-19014286.pdf

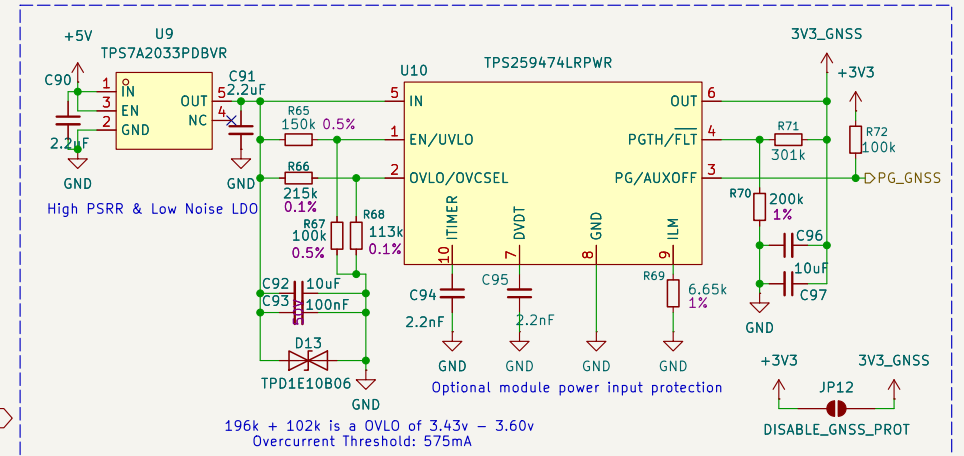

SMA + IPEX Connector

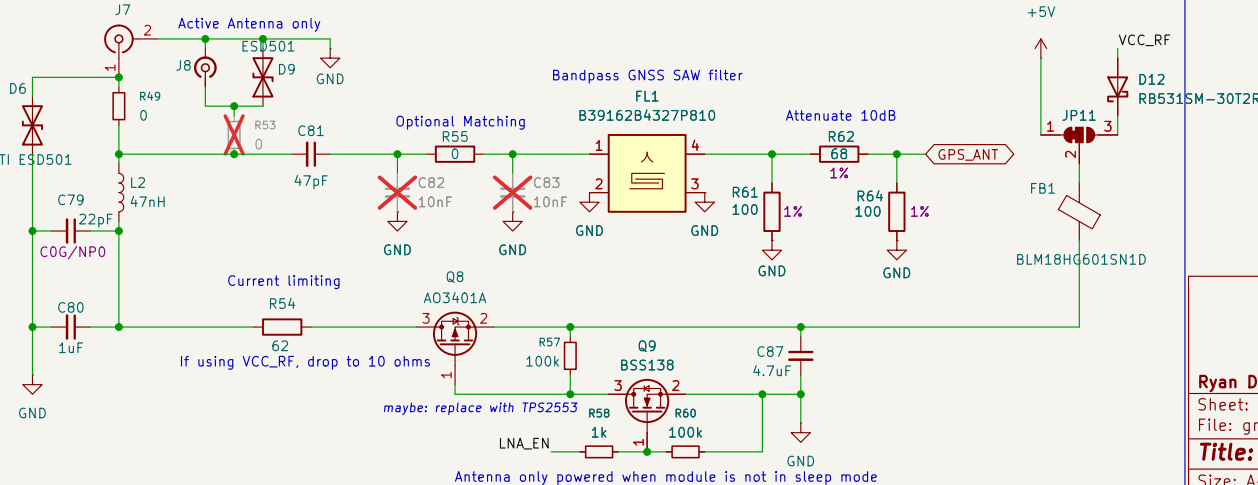

Ryan Di Lorenzo

Sheet: /Root/GNSS/

File: gnss.kicad_sch



Title: GNSS Module / Active RF Antenna

Size: A4 Date: 2026-05-14

KiCad E.D.A. 10.0.5-1-g226df246f3

Rev:


Id: 4/6

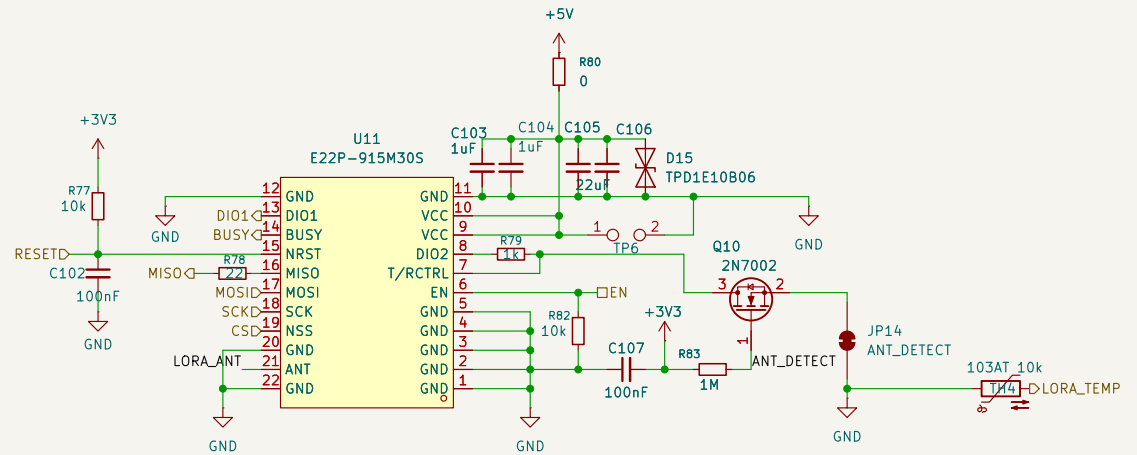

Ensure you set DI02 as RF Switch in program
https://jgromes.github.io/RadioLib/class_s_x126x.html#ae46e08d579f4acbad029b4cd4f4ffaf

SMA Connector

DC—shorted antenna only unless JP8 is cut

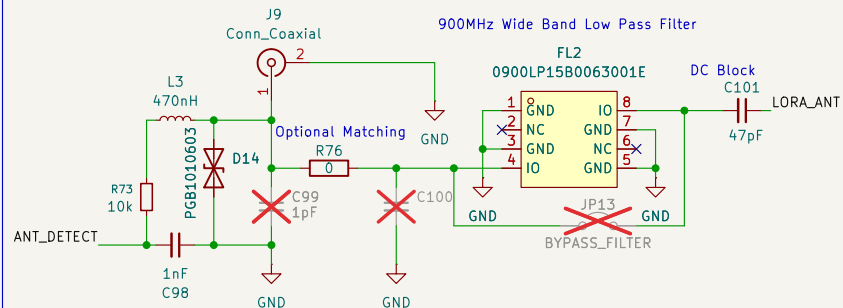

Ryan Di Lorenzo

Sheet: /Root/LoRa/

File: lora.kicad_sch

Title: LoRa Module / LoRa Antenna


Size: A4 Date: 2026-08-24

KiCad E.D.A. 10.0.5-1-g226df246f3



Rev:

Id: 5/6

5V Buck

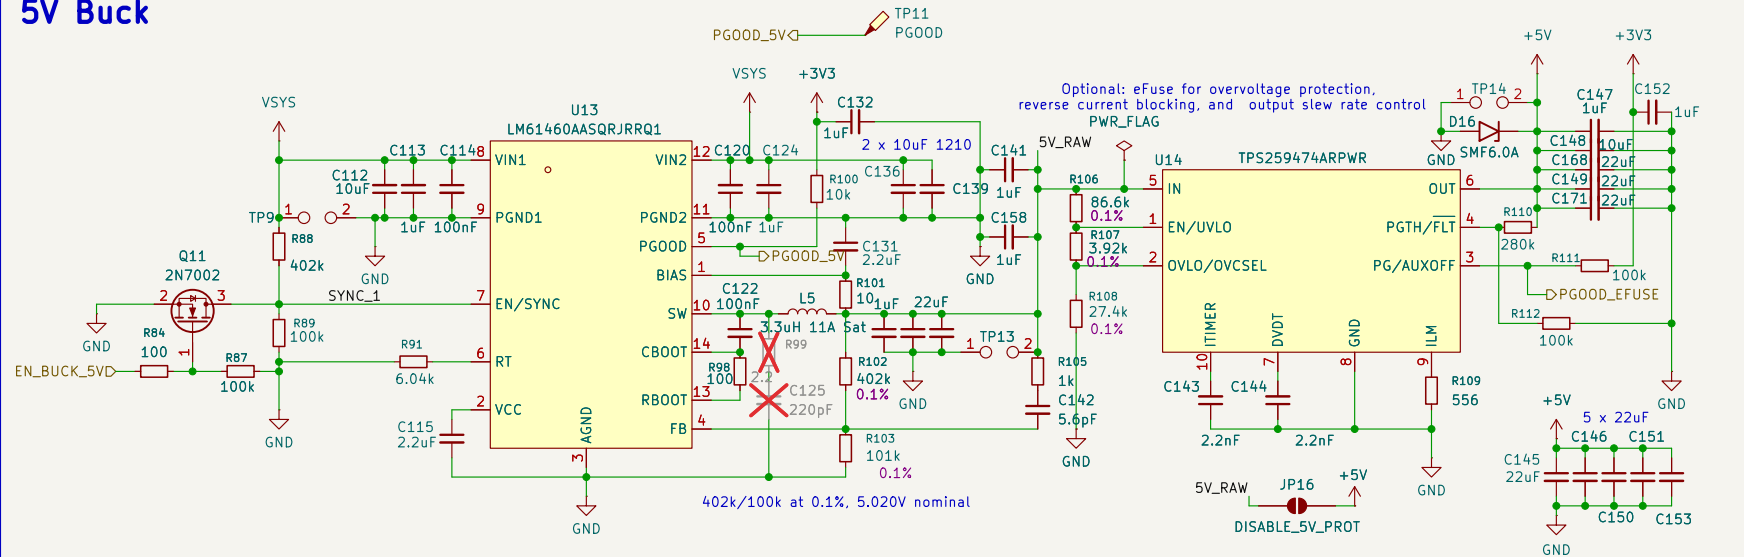

3V3 Buck

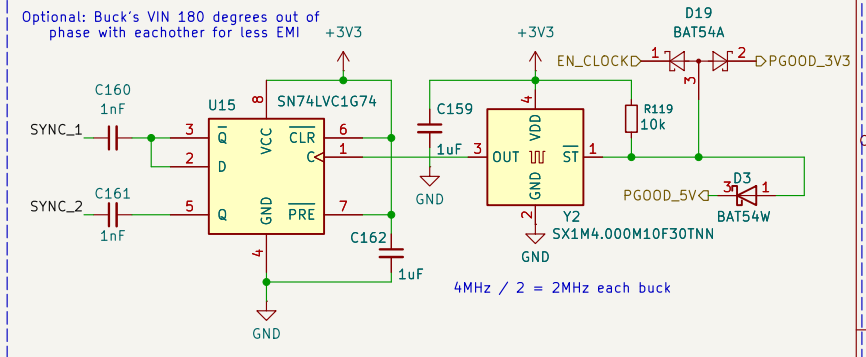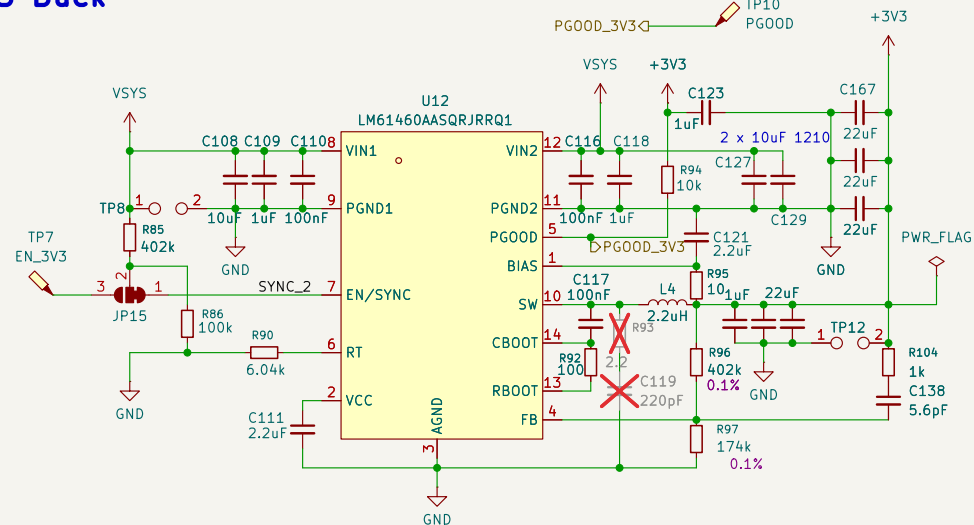

Ryan Di Lorenzo

Sheet: /Root/Rails/

File: rails.kicad_sch

Title: Power Regulators


Size: A4

Date: 2026-08-24

KiCad E.D.A. 10.0.5-1-g226df246f3

Rev:

Id: 6/6

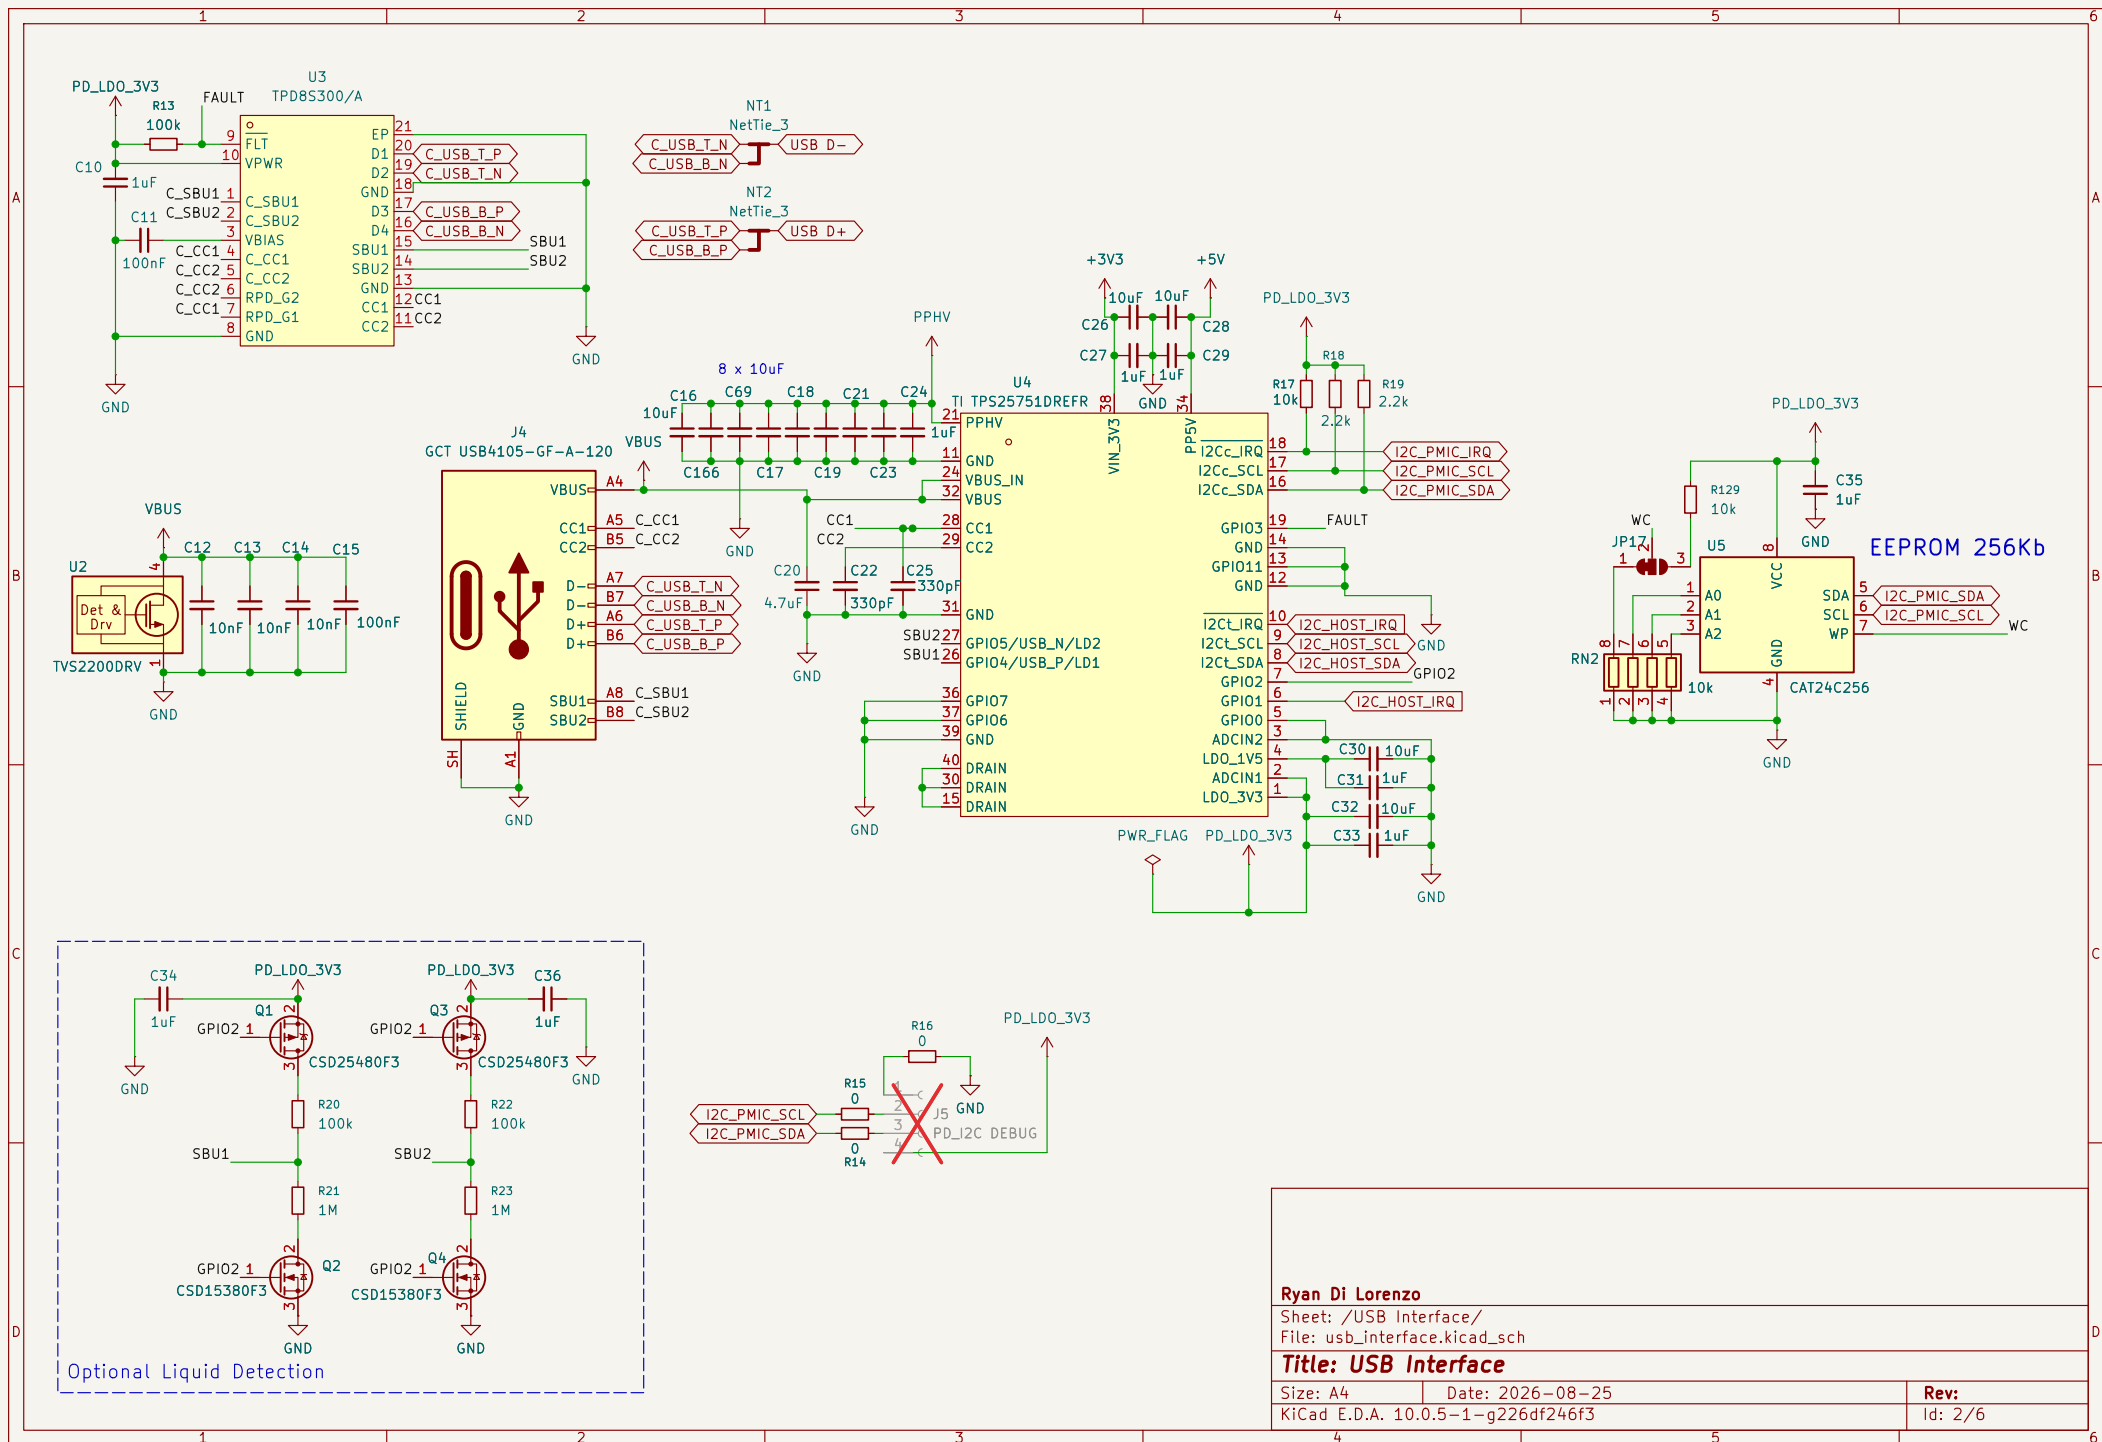

Ryan Di Lorenzo

Sheet: /USB Interface/
File: usb_interface.kicad_sch

Title: USB Interface

Size: A4 Date: 2026-08-25
KiCad E.D.A. 10.0.5-1-g226df246f3

Rev:
Id: 2/6

