


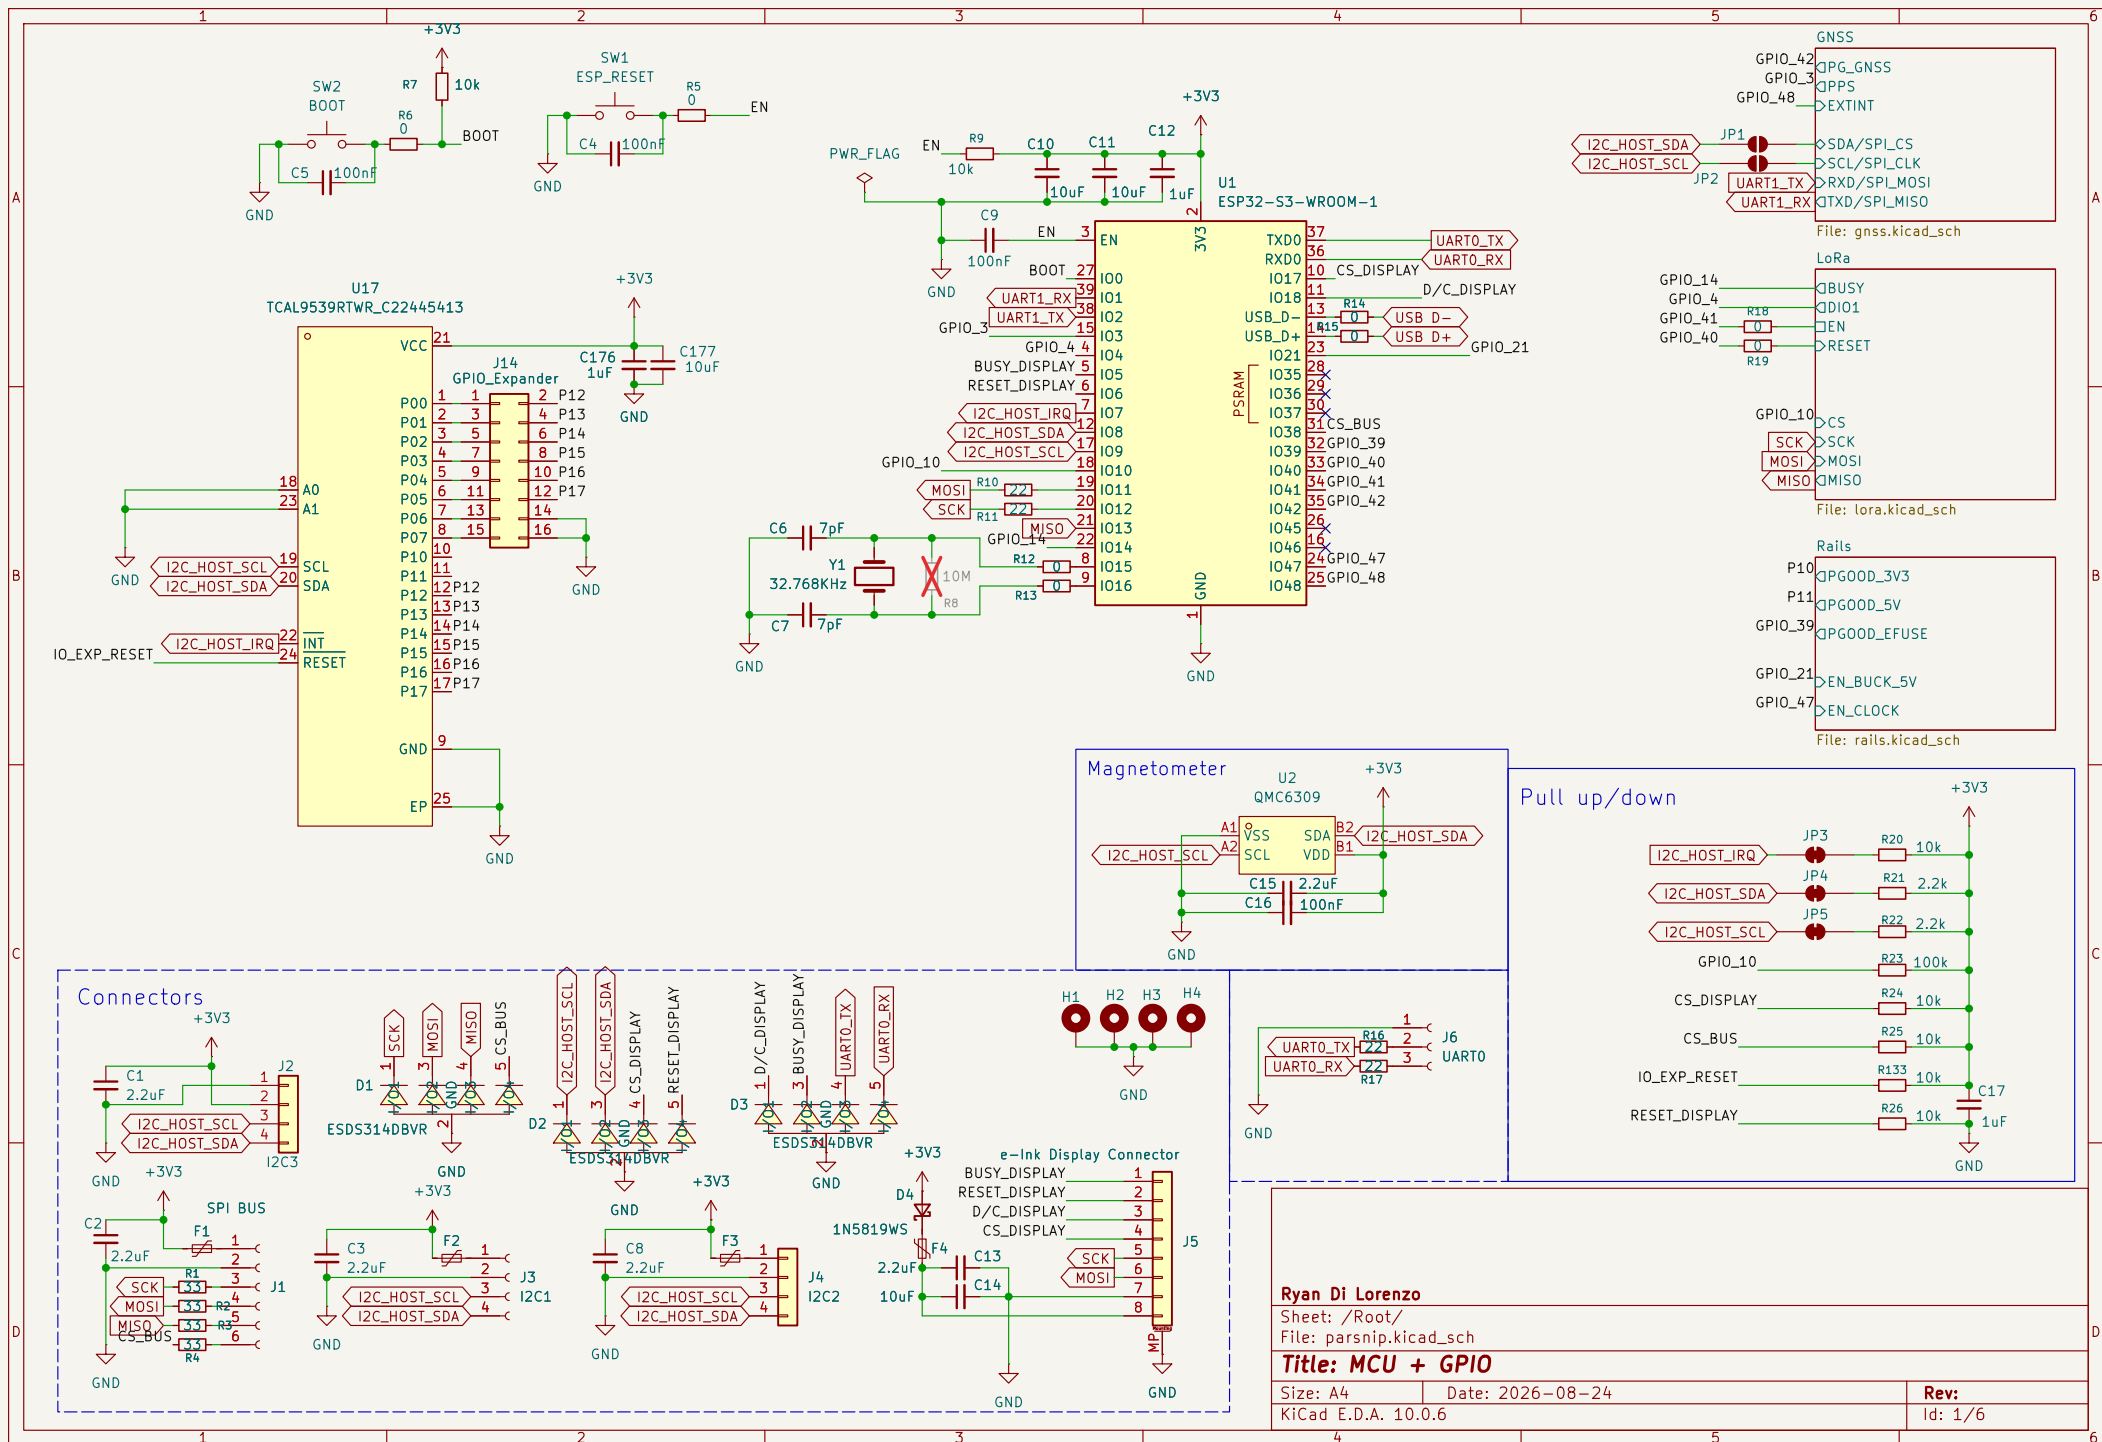

LEDs and Jumpers

High to enable I2C/UART, low to enable SPI

3V3_GNSS

D_SEL

JP11

R67 10k

JP8

R70 2k

D11 LED Red

JP9

R71 1k

D12 LED Blue

3V3_GNSS

GND



JP10

R68 2.2k



R72 2.2k

SDA/SPI_CS

SCL/SPI_CLK

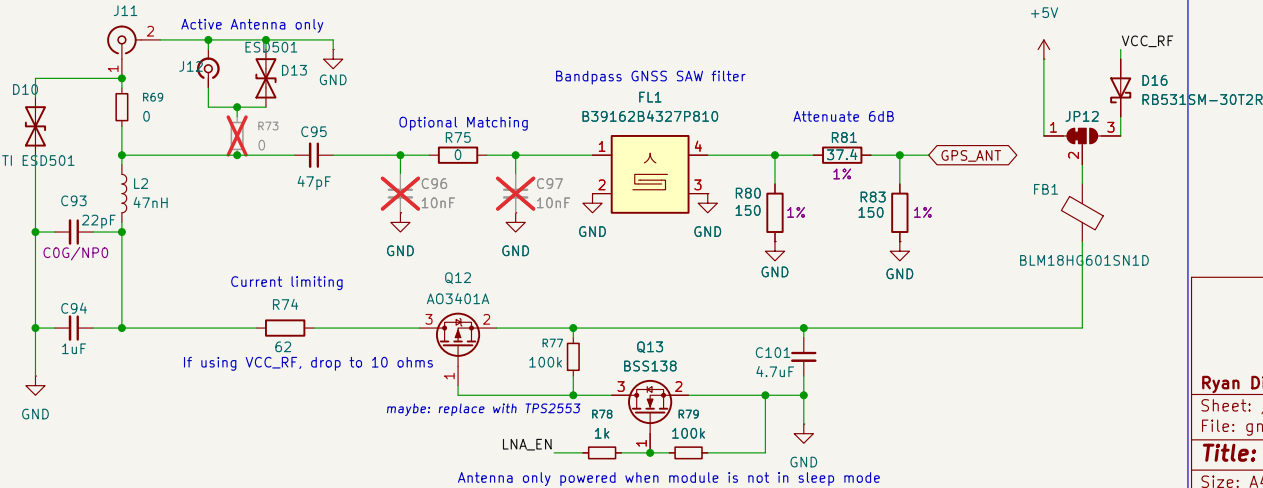


Id: 4/6

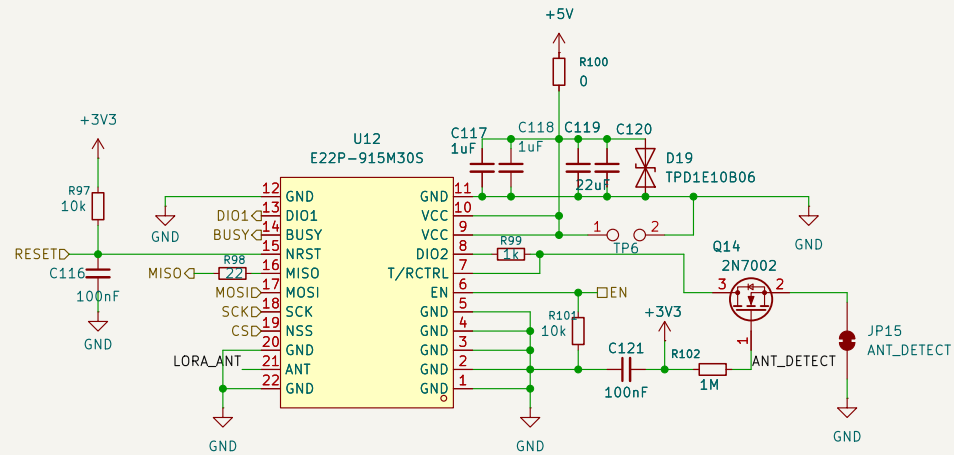

Ensure you set DIO2 as RF Switch in program
https://jgromes.github.io/RadioLib/class_s_x126x.html#ae46e08d579f4acbad029b4cd4f4ffaf

SMA Connector

DC—shorted antenna only unless JP8 is cut

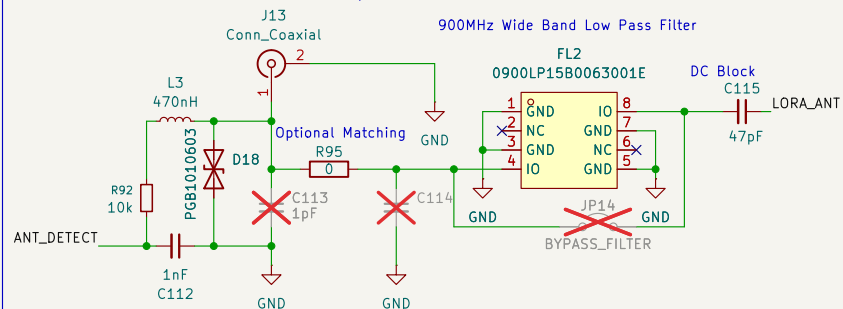

Ryan Di Lorenzo

Sheet: /Root/LoRa/

File: lora.kicad_sch

Title: LoRa Module / LoRa Antenna

Size: A4


Date: 2026-08-24

Rev:



KiCad E.D.A. 10.0.6

Id: 5/6

5V Buck

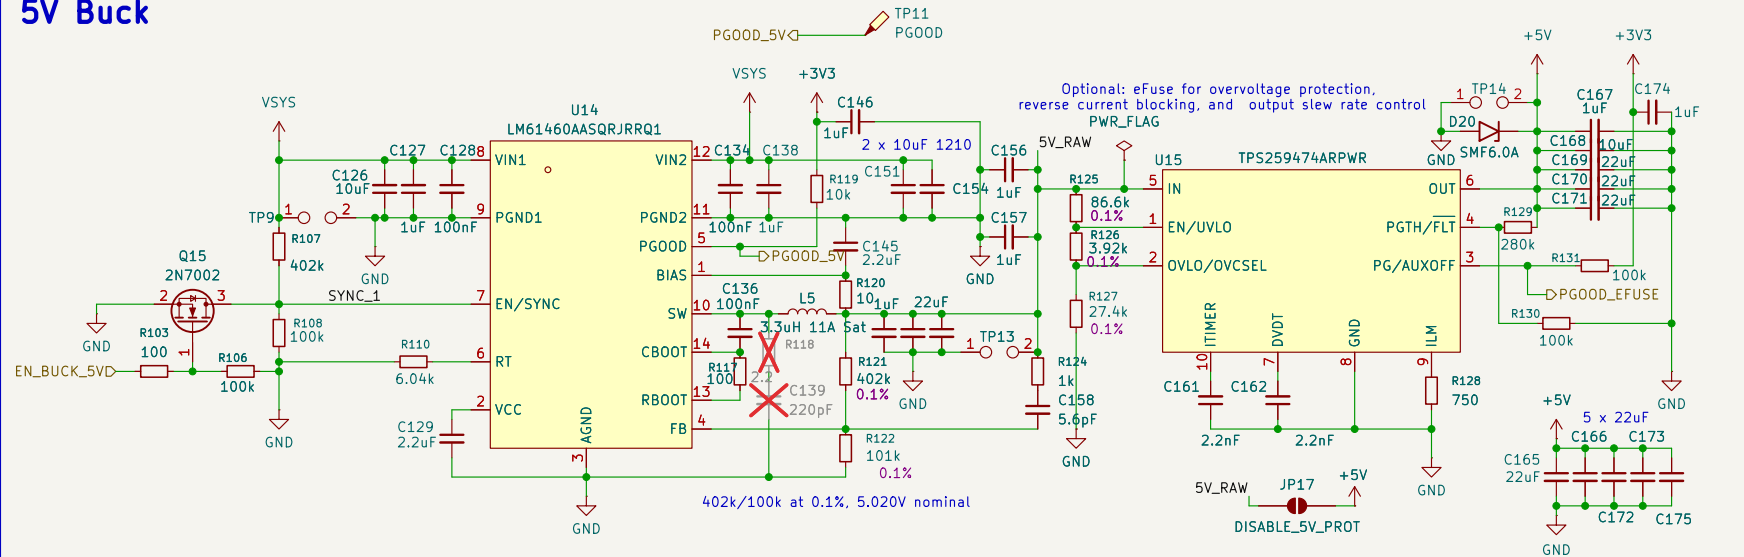

3V3 Buck

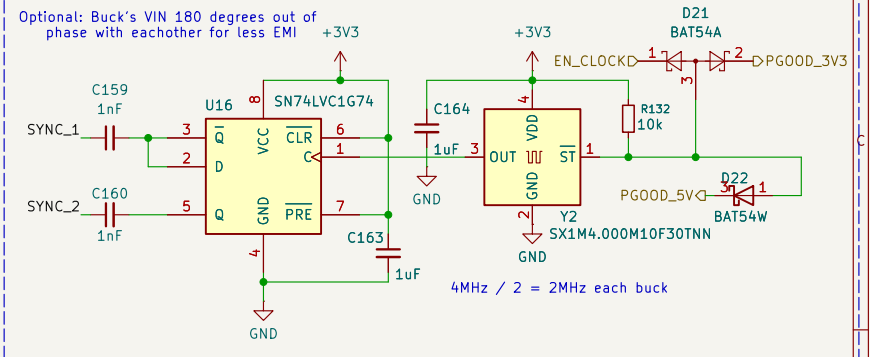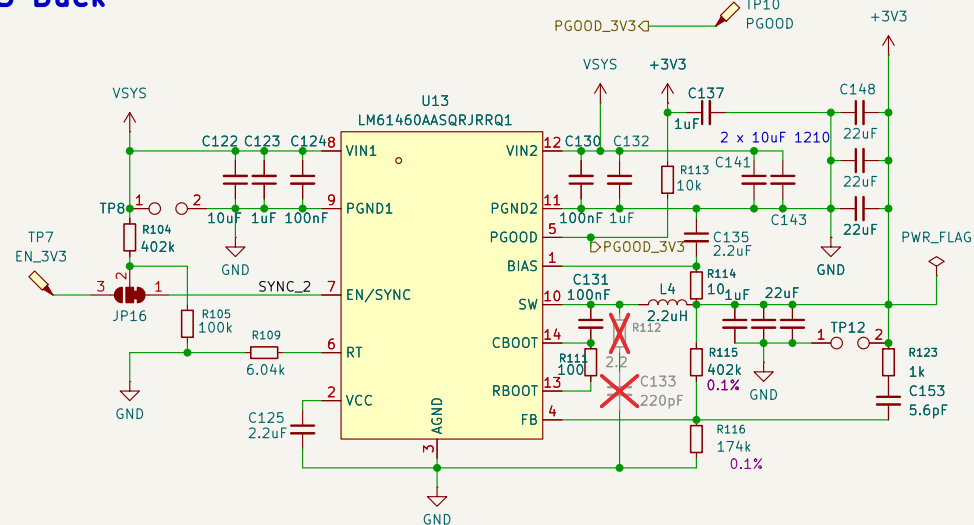

Ryan Di Lorenzo

Sheet: /Root/Rails/

File: rails.kicad_sch

Title: Power Regulators


Size: A4

Date: 2026-08-24

KiCad E.D.A. 10.0.6

Rev:

Id: 6/6

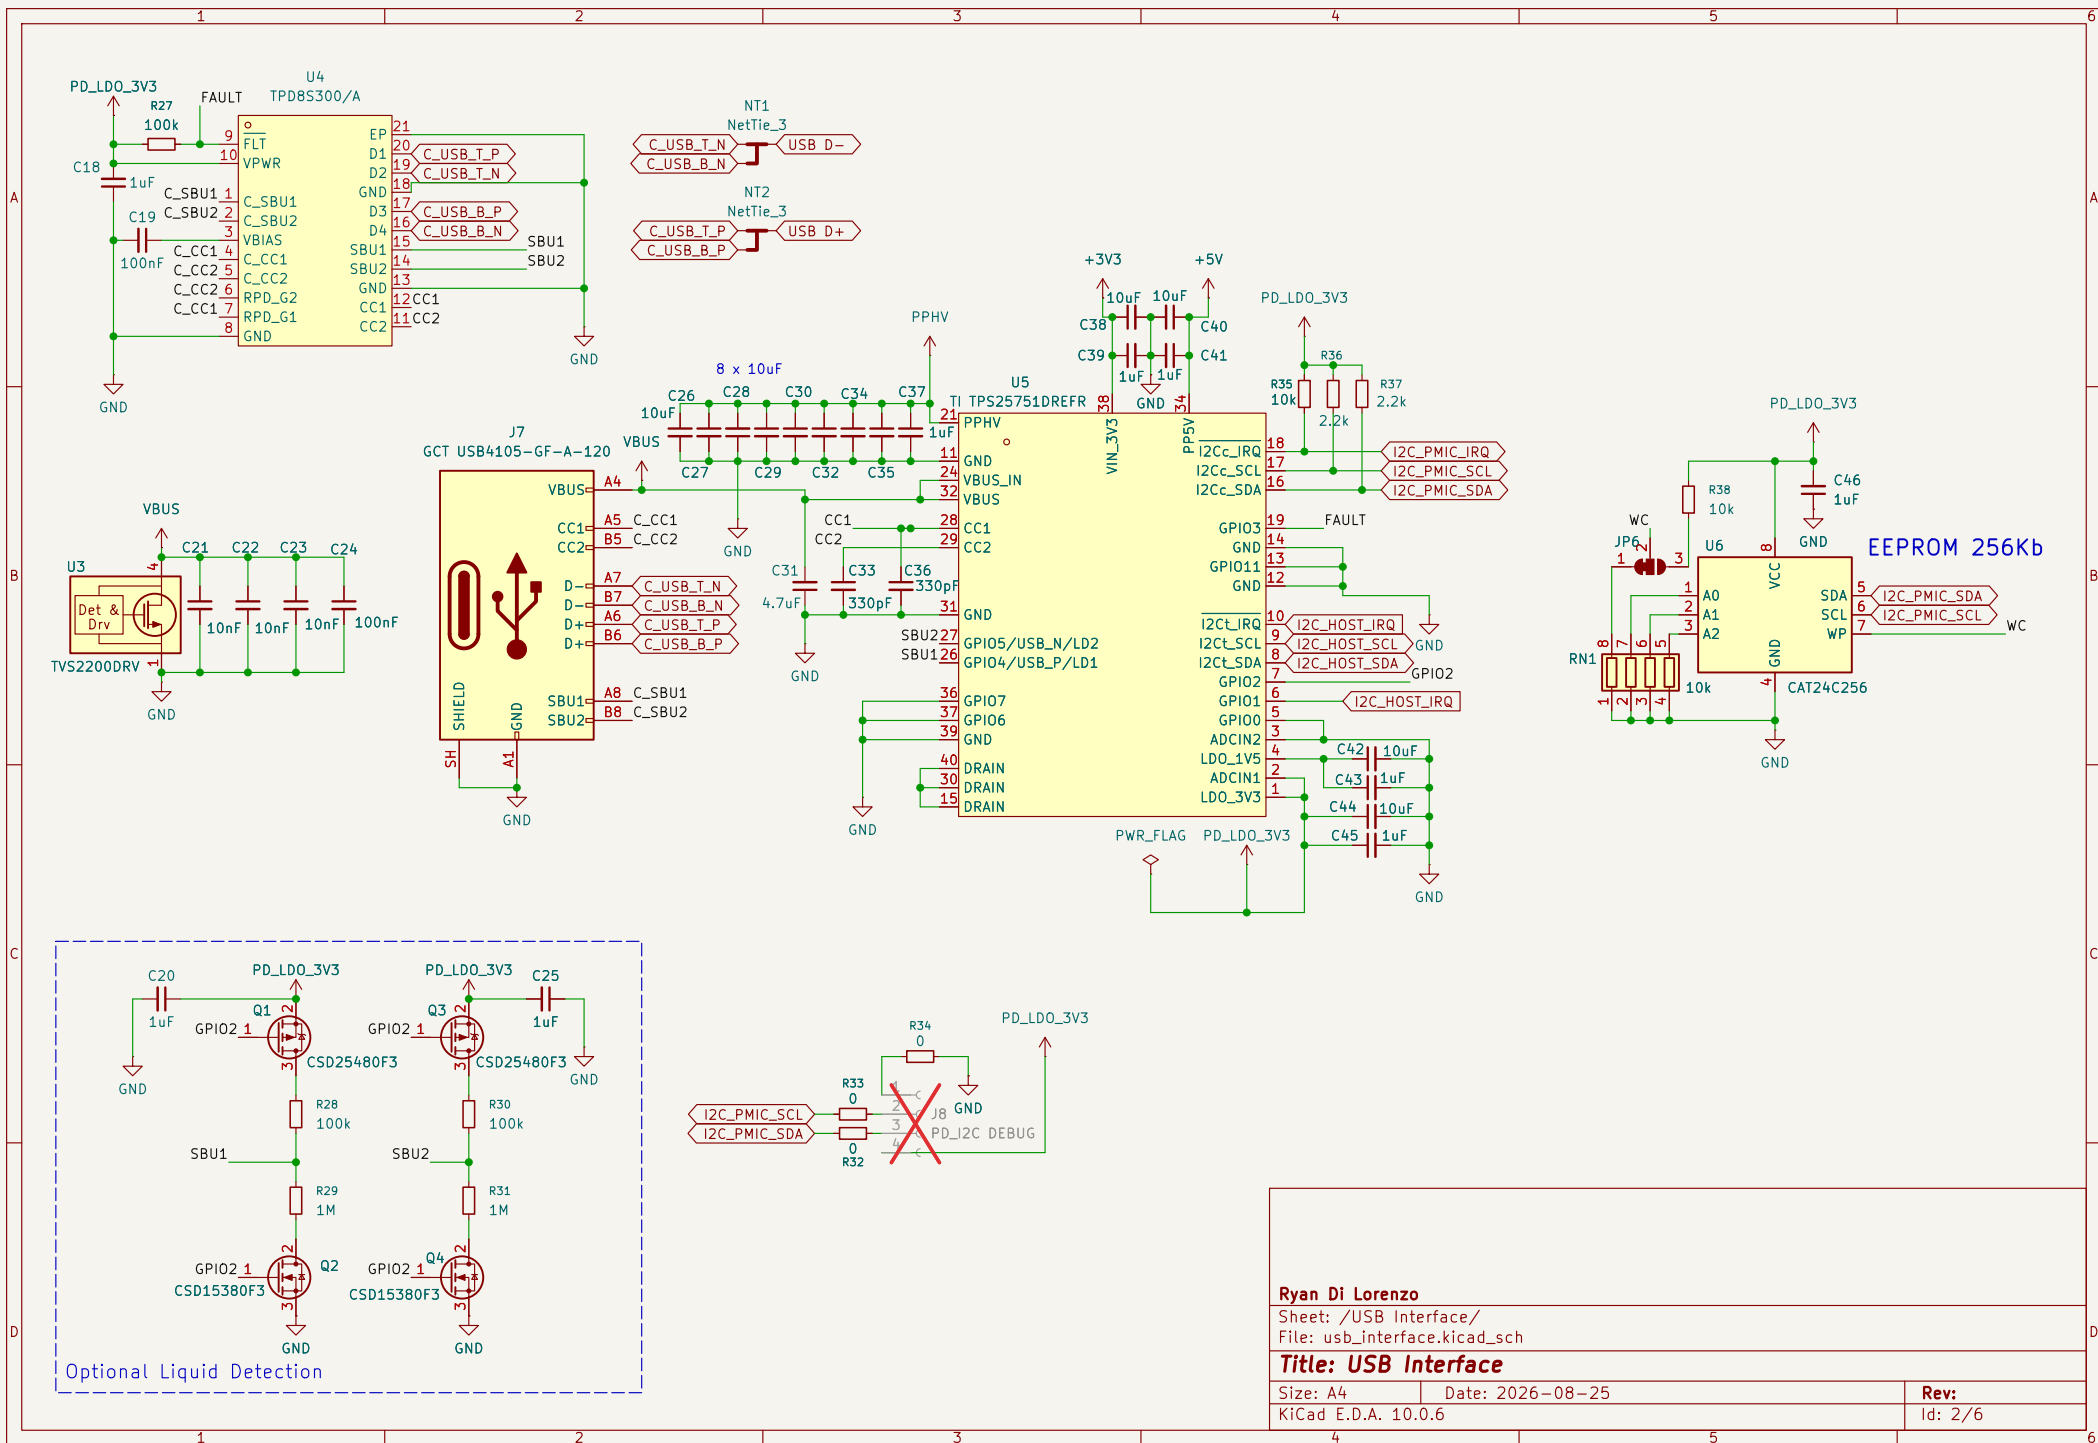

Ryan Di Lorenzo

Sheet: /USB Interface/
File: usb_interface.kicad_sch

Title: USB Interface


Size: A4 Date: 2026-08-25
KiCad E.D.A. 10.0.6

Rev:
Id: 2/6

Charge Controller


Capacitors voltage ratings specified,
generally >25V – use XR7/COG

VSYS from 7.1V – 8.8V for 2S, max -6A

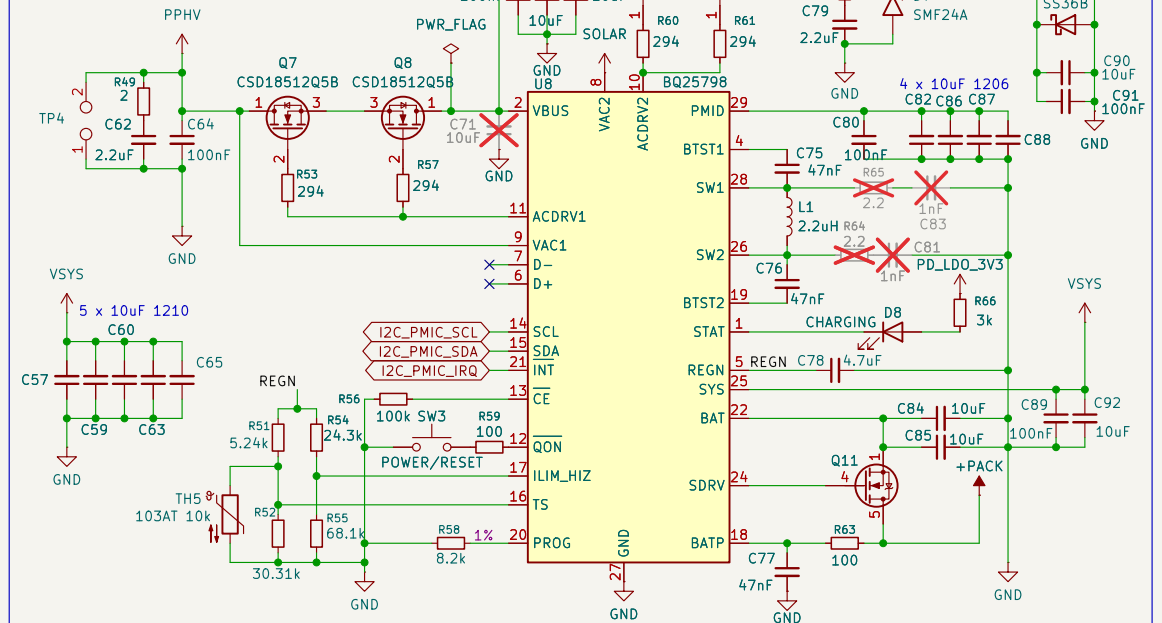

Battery Management System (BMS)

Capacitors voltage ratings specified, generally >25V – use XR7/COG

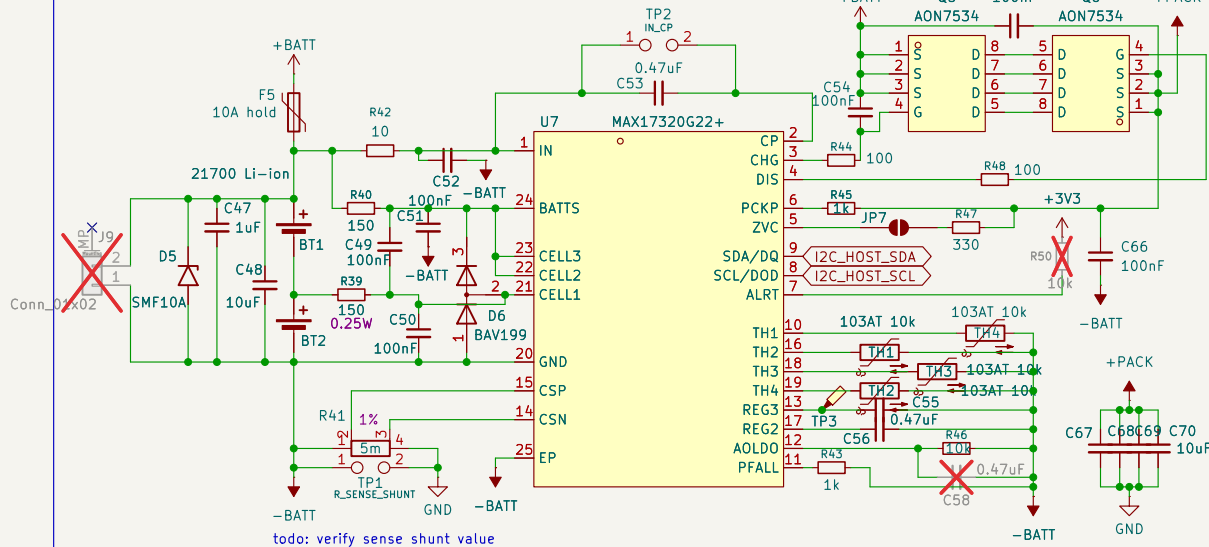

Ryan Di Lorenzo

Sheet: /Charger/

File: battery.kicad_sch

Title: Battery Charger / Battery Management System (BMS)

Size: A4 Date: 2026-08-24

KiCad E.D.A. 10.0.6

Rev:

Id: 3/6