


Seamless flexible waveguide

Seamless flexible waveguide, with no seams along the body, made by Tecnolambro. The table gives VSWR, attenuation and power for every size from WR-22 to WR-284.

TECHNICAL DATA

Size	Frequency (GHz)	VSWR (600 mm)	Attenuation (dB/m)	CW (W)	Peak (kW)
WR-22	33.0–50.1	1.35	1.20	200	10
WR-28	26.4–40.1	1.20	1.60	600	20
WR-34	21.7–33.0	On request			
WR-42	17.6–26.7	1.12	0.90	800	40
WR-51	14.5–22.0	1.08	0.60	1,000	70
WR-62	11.9–18.0	1.06	0.45	1,500	100
WR-75	9.84–15.0	1.06	0.40	2,000	140
WR-90	8.2–12.5	1.07	0.30	3,000	180
WR-112	6.58–10.0	1.07	0.25	4,000	300
WR-137	5.38–8.18	1.07	0.20	5,000	500
WR-159	4.64–7.05	On request			
WR-187	3.94–5.99	1.08	0.19	6,500	1,300
WR-229	3.22–4.9	1.09	0.18	8,000	1,500
WR-284	2.6–3.95	1.07	0.15	10,000	2,000

TECHNICAL DRAWING · WR-90

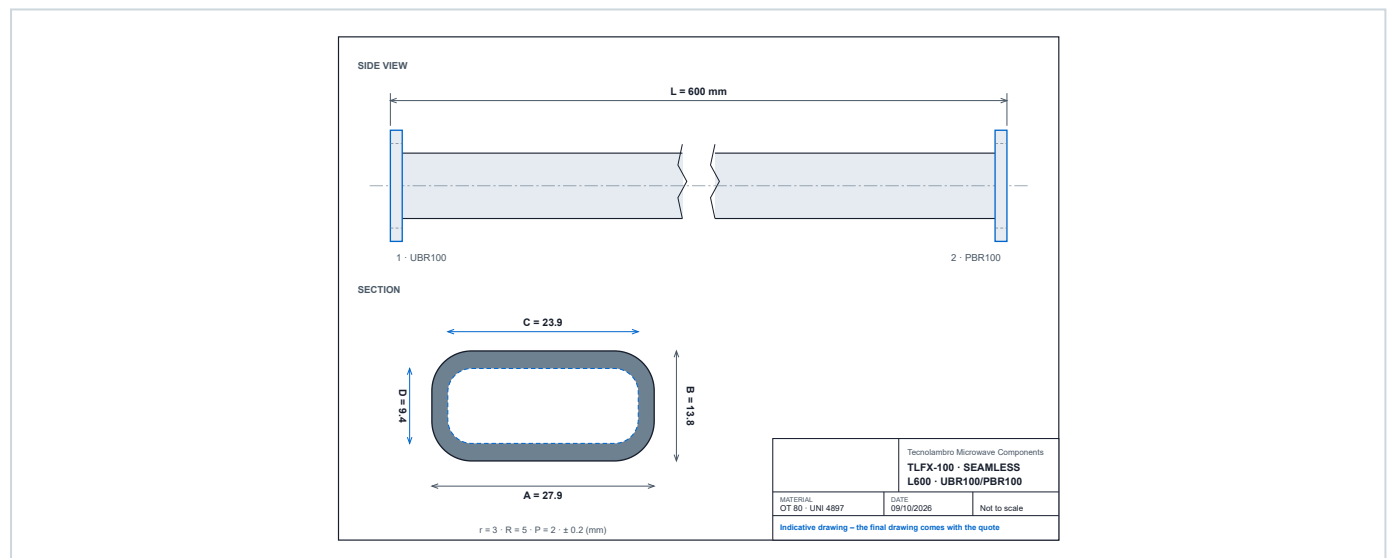

Indicative data: final values are stated in the quote.

Request a quote: tecnolambro.it/shop · +39 375 577 1084

Tecnolambro S.a.s. di Pasquini Marco & C. · Via degli Spinedi 20, 27010 Miradolo Terme (PV) · info@tecnolambro.it · +39 375 577 1084

ISO 9001:2015 · ISO 14001:2015



Product page