


Twistable flexible waveguide

Flexible, twistable brass waveguide made by Tecnolambro. It bends in the E and H planes and twists around its own axis: it connects radio and antenna when the flanges are misaligned or rotated, and absorbs vibration and thermal expansion.

TECHNICAL DATA

Size	Frequency (GHz)	RL 300	RL 600	RL 1000	Attenuation (dB/m)	CW (W)	Peak (kW)
WR-22	33.0–50.1	19.5	18.5	17.5	2.30	—	—
WR-28	26.4–40.1	21.0	19.7	18.8	2.10	75	20
WR-34	21.7–33.0	21.7	20.8	19.4	1.50	85	32
WR-42	17.6–26.7	23.0	22.1	20.1	1.20	100	42
WR-51	14.5–22.0	24.9	23.7	23.1	1.10	200	85
WR-62	11.9–18.0	27.3	25.7	24.3	0.90	400	115
WR-75	9.84–15.0	27.3	25.7	24.9	0.55	750	120
WR-90	8.2–12.5	28.3	26.4	25.7	0.42	1,000	210
WR-112	6.58–10.0	28.3	26.4	25.7	0.36	1,500	320
WR-137	5.38–8.18	29.4	27.3	26.4	0.30	2,000	550
WR-159	4.64–7.05	29.4	27.3	26.4	0.22	2,500	620
WR-187	3.94–5.99	29.4	27.3	26.4	0.17	3,000	1,250
WR-229	3.22–4.9	30.7	29.4	28.3	0.14	4,000	1,550
WR-284	2.6–3.95	30.7	29.4	28.3	0.12	4,000	2,000

TECHNICAL DRAWING · WR-90

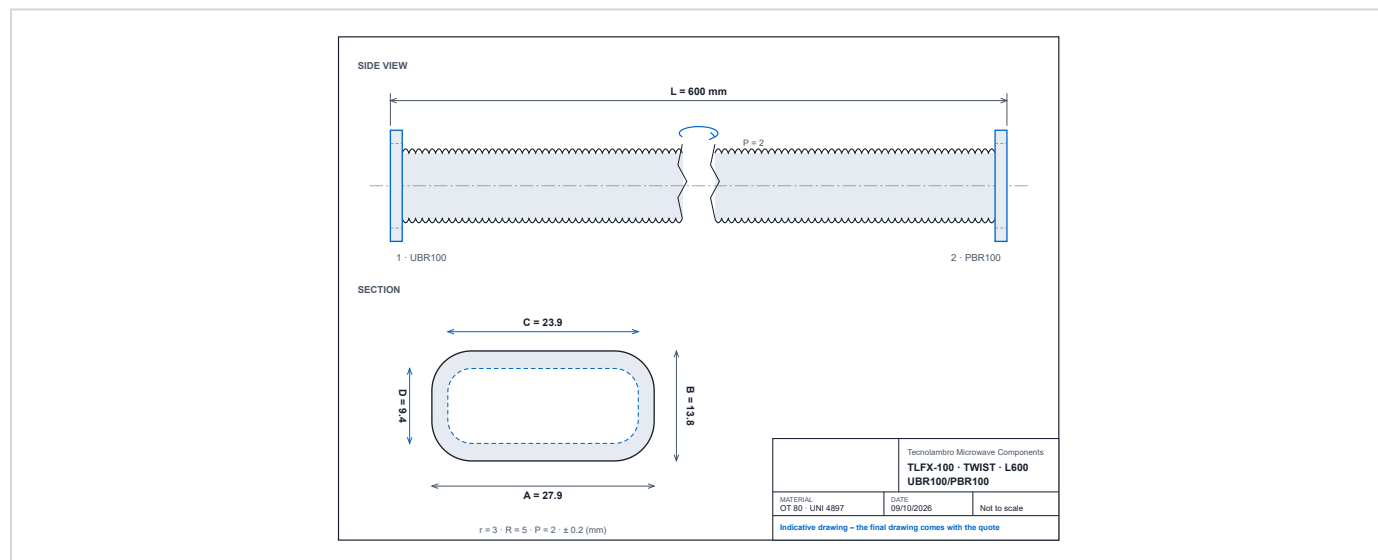

Indicative data: final values are stated in the quote.

Request a quote: tecnolambro.it/shop · +39 375 577 1084

Tecnolambro S.a.s. di Pasquini Marco & C. · Via degli Spinedi 20, 27010 Miradolo Terme (PV) · info@tecnolambro.it · +39 375 577 1084

ISO 9001:2015 · ISO 14001:2015



Product page