


Twists

Rigid waveguide twists to rotate polarization: 90° in every size, 45° or the rotation you need, clockwise or counter-clockwise.

AVAILABLE SIZES

Size	Frequency (GHz)	IEC	WG
WR-22	33.0–50.1	R400	WG23
WR-28	26.4–40.1	R320	WG22
WR-34	21.7–33.0	R260	WG21
WR-42	17.6–26.7	R220	WG20
WR-51	14.5–22.0	R180	WG19
WR-62	11.9–18.0	R140	WG18
WR-75	9.84–15.0	R120	WG17
WR-90	8.2–12.5	R100	WG16
WR-112	6.58–10.0	R84	WG15
WR-137	5.38–8.18	R70	WG14
WR-159	4.64–7.05	R58	WG13
WR-187	3.94–5.99	R48	WG12
WR-229	3.22–4.9	R40	WG11A
WR-284	2.6–3.95	R32	WG10

TECHNICAL DRAWING · WR-90

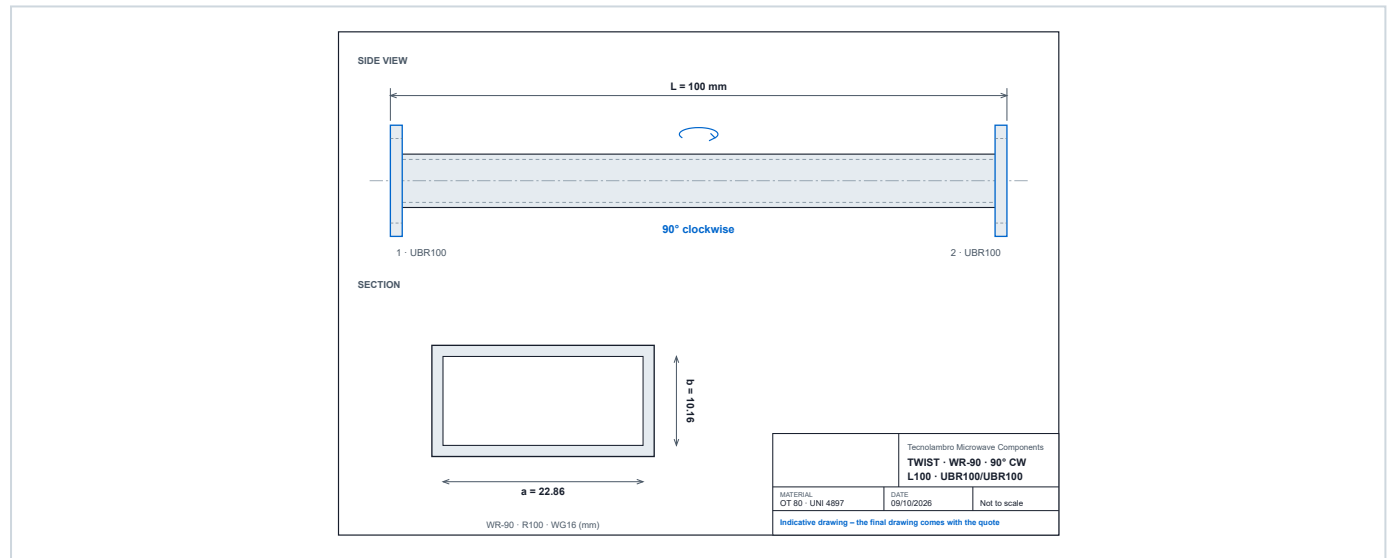

Indicative data: final values are stated in the quote.

Request a quote: tecnolambro.it/shop · +39 375 577 1084

Tecnolambro S.a.s. di Pasquini Marco & C. · Via degli Spinedi 20, 27010 Miradolo Terme (PV) · info@tecnolambro.it · +39 375 577 1084

ISO 9001:2015 · ISO 14001:2015



Product page