

WR-112 flexible waveguide

The WR-112 flexible waveguide (R84 · WG15) covers 6.58–10.0 GHz. We build it twistable and seamless, with the flanges and length you need.

SIZE DATA

Operating band	6.58–10.0 GHz
Designations	WR-112 · R84 · WG15
Inner section a × b	28.50 × 12.62 mm
Code	TLFX-84
Overall A × B	34.0 × 16.7 mm
Corrugation root C × D	30.4 × 12.1 mm
Pitch P	2.1 mm
Tolerance	± 0.20 mm
Standard length	300 · 600 · 900 · 1,000 · 1,200 mm
Material	Brass OT 80 UNI 4897

Inner section a × b: standard EIA values. The other dimensions come from the Tecnolambro dimension table.

ELECTRICAL DATA · TWISTABLE

Return loss 300 mm	28.3 dB
Return loss 600 mm	26.4 dB
Return loss 1000 mm	25.7 dB
Attenuation	0.36 dB/m
CW power	1,500 W
Peak power	320 kW

ELECTRICAL DATA · SEAMLESS

VSWR 600 mm	1.07
Attenuation	0.25 dB/m
CW power	4,000 W
Peak power	300 kW

FLANGES

UBR84

PBR84


PDR84

UDR84

CPR112F

CPR112G

TECHNICAL DRAWING

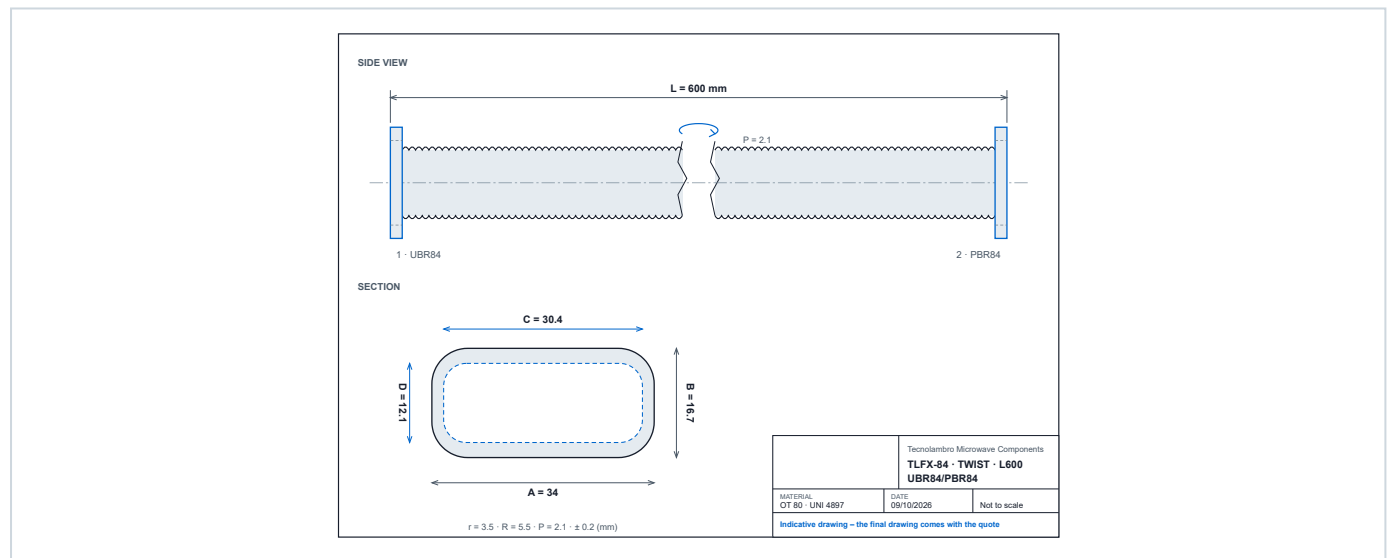

Indicative data: final values are stated in the quote.

Request a quote: tecnolambro.it/shop · +39 375 577 1084

Tecnolambro S.a.s. di Pasquini Marco & C. · Via degli Spinedi 20, 27010 Miradolo Terme (PV) · info@tecnolambro.it · +39 375 577 1084

ISO 9001:2015 · ISO 14001:2015



Size page