

WR-137 flexible waveguide

The WR-137 flexible waveguide (R70 · WG14) covers 5.38–8.18 GHz. We build it twistable and seamless, with the flanges and length you need.

SIZE DATA

Operating band	5.38–8.18 GHz
Designations	WR-137 · R70 · WG14
Inner section a × b	34.85 × 15.80 mm
Code	TLFX-70
Overall A × B	40.0 × 20.0 mm
Corrugation root C × D	35.4 × 15.1 mm
Pitch P	2.5 mm
Tolerance	± 0.20 mm
Standard length	300 · 600 · 900 · 1,000 · 1,200 mm
Material	Brass OT 80 UNI 4897

Inner section a × b: standard EIA values. The other dimensions come from the Tecnolambro dimension table.

ELECTRICAL DATA · TWISTABLE

Return loss 300 mm	29.4 dB
Return loss 600 mm	27.3 dB
Return loss 1000 mm	26.4 dB
Attenuation	0.30 dB/m
CW power	2,000 W
Peak power	550 kW


ELECTRICAL DATA · SEAMLESS

VSWR 600 mm	1.07
Attenuation	0.20 dB/m
CW power	5,000 W
Peak power	500 kW

FLANGES

UBR70	PBR70	PDR70	UDR70	CPR137F
CPR137G				

TECHNICAL DRAWING

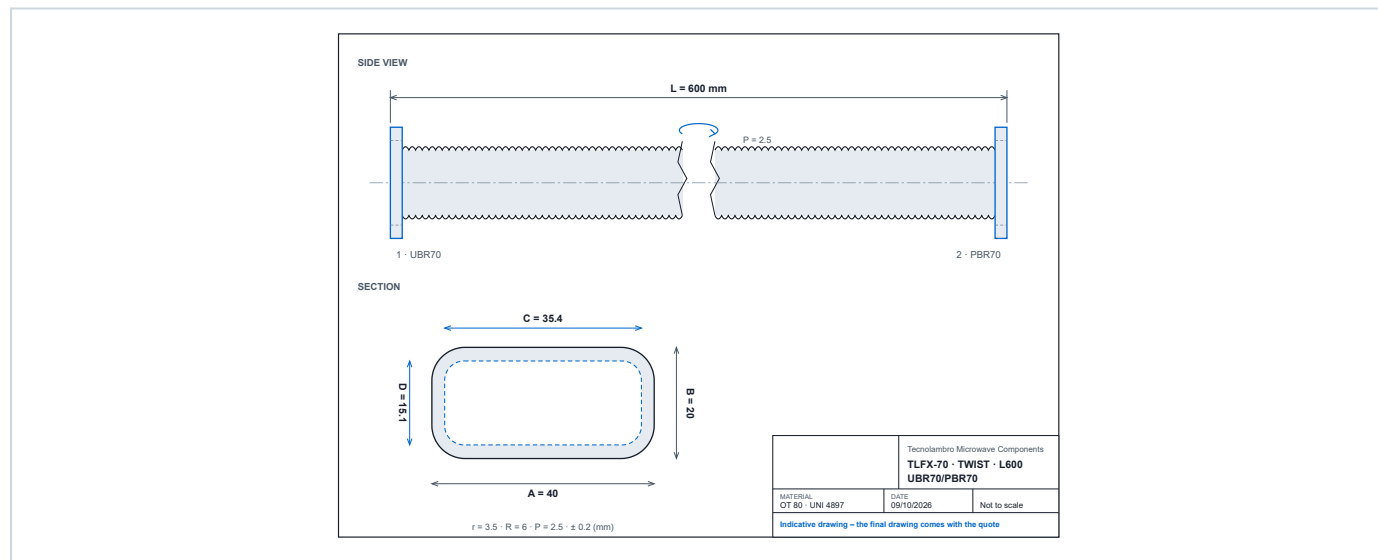

Indicative data: final values are stated in the quote.

Request a quote: tecnolambro.it/shop · +39 375 577 1084

Tecnolambro S.a.s. di Pasquini Marco & C. · Via degli Spinedi 20, 27010 Miradolo Terme (PV) · info@tecnolambro.it · +39 375 577 1084

ISO 9001:2015 · ISO 14001:2015



Size page