

WR-159 flexible waveguide

The WR-159 flexible waveguide (R58 · WG13) covers 4.64–7.05 GHz. We build it twistable and seamless, with the flanges and length you need.

SIZE DATA

Operating band	4.64–7.05 GHz
Designations	WR-159 · R58 · WG13
Inner section a × b	40.39 × 20.19 mm
Standard length	300 · 600 · 900 · 1,000 · 1,200 mm
Material	Brass OT 80 UNI 4897

Inner section a × b: standard EIA values. The other dimensions come from the Tecnolambro dimension table.

ELECTRICAL DATA · TWISTABLE

Return loss 300 mm	29.4 dB
Return loss 600 mm	27.3 dB
Return loss 1000 mm	26.4 dB
Attenuation	0.22 dB/m
CW power	2,500 W
Peak power	620 kW

ELECTRICAL DATA · SEAMLESS

Electrical data on request.

FLANGES

UBR58

PBR58


PDR58

UDR58

CPR159F

CPR159G

TECHNICAL DRAWING

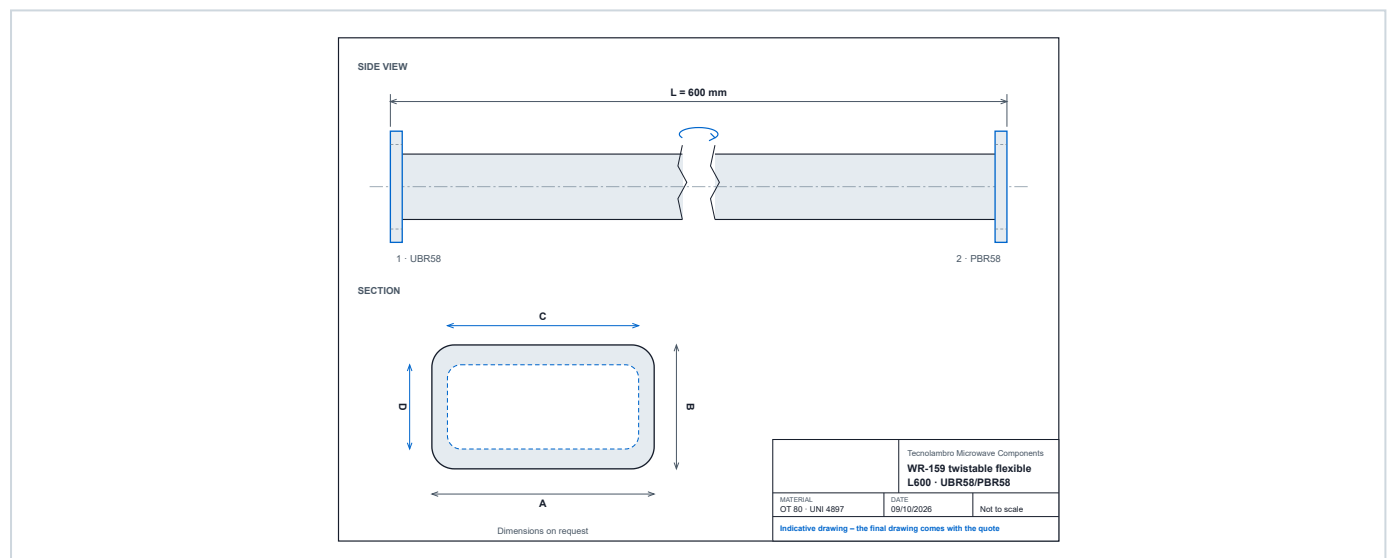

Indicative data: final values are stated in the quote.

Request a quote: tecnolambro.it/shop · +39 375 577 1084

Tecnolambro S.a.s. di Pasquini Marco & C. · Via degli Spinedi 20, 27010 Miradolo Terme (PV) · info@tecnolambro.it · +39 375 577 1084

ISO 9001:2015 · ISO 14001:2015



Size page