

WR-187 flexible waveguide

The WR-187 flexible waveguide (R48 · WG12) covers 3.94–5.99 GHz. We build it twistable and seamless, with the flanges and length you need.

SIZE DATA

Operating band	3.94–5.99 GHz
Designations	WR-187 · R48 · WG12
Inner section a × b	47.55 × 22.15 mm
Code	TLFX-48
Overall A × B	54.4 × 26.7 mm
Corrugation root C × D	48.0 × 20.4 mm
Pitch P	2.5 mm
Tolerance	± 0.25 mm
Standard length	300 · 600 · 900 · 1,000 · 1,200 mm
Material	Brass OT 80 UNI 4897

Inner section a × b: standard EIA values. The other dimensions come from the Tecnolambro dimension table.

ELECTRICAL DATA · TWISTABLE

Return loss 300 mm	29.4 dB
Return loss 600 mm	27.3 dB
Return loss 1000 mm	26.4 dB
Attenuation	0.17 dB/m
CW power	3,000 W
Peak power	1,250 kW


ELECTRICAL DATA · SEAMLESS

VSWR 600 mm	1.08
Attenuation	0.19 dB/m
CW power	6,500 W
Peak power	1,300 kW

FLANGES

UBR48	PBR48	PDR48	UDR48	CPR187F
CPR187G				

TECHNICAL DRAWING

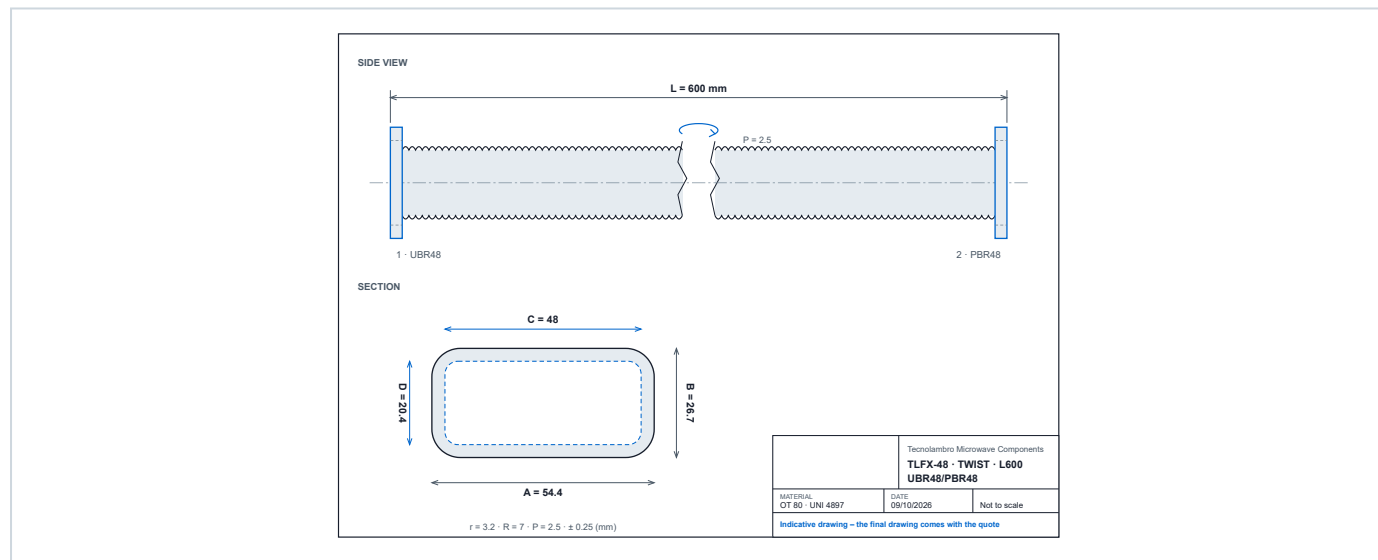

Indicative data: final values are stated in the quote.

Request a quote: tecnolambro.it/shop · +39 375 577 1084

Tecnolambro S.a.s. di Pasquini Marco & C. · Via degli Spinedi 20, 27010 Miradolo Terme (PV) · info@tecnolambro.it · +39 375 577 1084

ISO 9001:2015 · ISO 14001:2015



Size page