

WR-22 flexible waveguide

The WR-22 flexible waveguide (R400 · WG23) covers 33.0–50.1 GHz. We build it twistable and seamless, with the flanges and length you need.

SIZE DATA

Operating band	33.0–50.1 GHz
Designations	WR-22 · R400 · WG23
Inner section a × b	5.69 × 2.84 mm
Code	TLFX-400
Overall A × B	8.0 × 5.3 mm
Corrugation root C × D	6.0 × 2.9 mm
Pitch P	1.2 mm
Tolerance	± 0.15 mm
Standard length	300 · 600 · 900 · 1,000 · 1,200 mm
Material	Brass OT 80 UNI 4897

Inner section a × b: standard EIA values. The other dimensions come from the TecnoLambro dimension table.

ELECTRICAL DATA · TWISTABLE

Return loss 300 mm	19.5 dB
Return loss 600 mm	18.5 dB
Return loss 1000 mm	17.5 dB
Attenuation	2.30 dB/m

ELECTRICAL DATA · SEAMLESS

VSWR 600 mm	1.35
Attenuation	1.20 dB/m
CW power	200 W
Peak power	10 kW


FLANGES

UBR400

PBR400

PDR400

TECHNICAL DRAWING

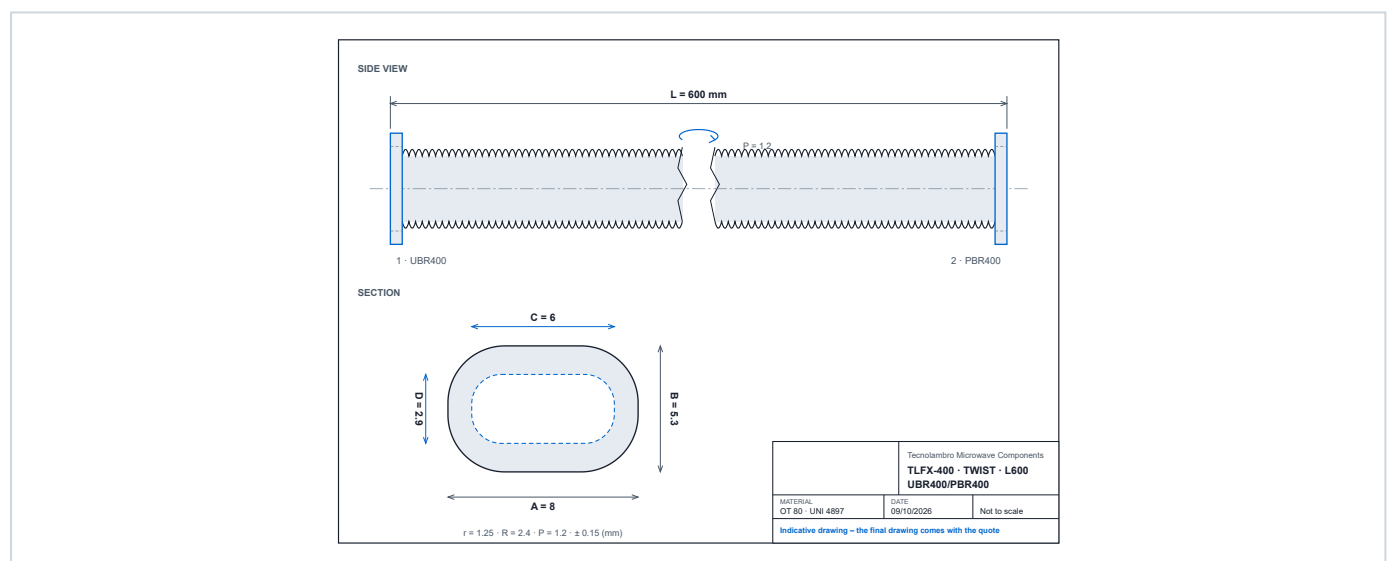

Indicative data: final values are stated in the quote.

Request a quote: tecnolambro.it/shop · +39 375 577 1084

Tecnolambro S.a.s. di Pasquini Marco & C. · Via degli Spinedi 20, 27010 Miradolo Terme (PV) · info@tecnolambro.it · +39 375 577 1084

ISO 9001:2015 · ISO 14001:2015



Size page