

# WR-229 flexible waveguide

The WR-229 flexible waveguide (R40 · WG11A) covers 3.22–4.9 GHz. We build it twistable and seamless, with the flanges and length you need.

## SIZE DATA

|                        |                                    |
|------------------------|------------------------------------|
| Operating band         | 3.22–4.9 GHz                       |
| Designations           | WR-229 · R40 · WG11A               |
| Inner section a × b    | 58.17 × 29.08 mm                   |
| Code                   | TLFX-40                            |
| Overall A × B          | 64.8 × 34.0 mm                     |
| Corrugation root C × D | 59.5 × 28.5 mm                     |
| Pitch P                | 3.2 mm                             |
| Tolerance              | ± 0.30 mm                          |
| Standard length        | 300 · 600 · 900 · 1,000 · 1,200 mm |
| Material               | Brass OT 80 UNI 4897               |

Inner section a × b: standard EIA values. The other dimensions come from the TecnoLambro dimension table.

## ELECTRICAL DATA · TWISTABLE

|                     |           |
|---------------------|-----------|
| Return loss 300 mm  | 30.7 dB   |
| Return loss 600 mm  | 29.4 dB   |
| Return loss 1000 mm | 28.3 dB   |
| Attenuation         | 0.14 dB/m |
| CW power            | 4,000 W   |
| Peak power          | 1,550 kW  |


## ELECTRICAL DATA · SEAMLESS

|             |           |
|-------------|-----------|
| VSWR 600 mm | 1.09      |
| Attenuation | 0.18 dB/m |
| CW power    | 8,000 W   |
| Peak power  | 1,500 kW  |

## FLANGES

|         |       |       |       |         |
|---------|-------|-------|-------|---------|
| UBR40   | PBR40 | PDR40 | UDR40 | CPR229F |
| CPR229G |       |       |       |         |

## TECHNICAL DRAWING

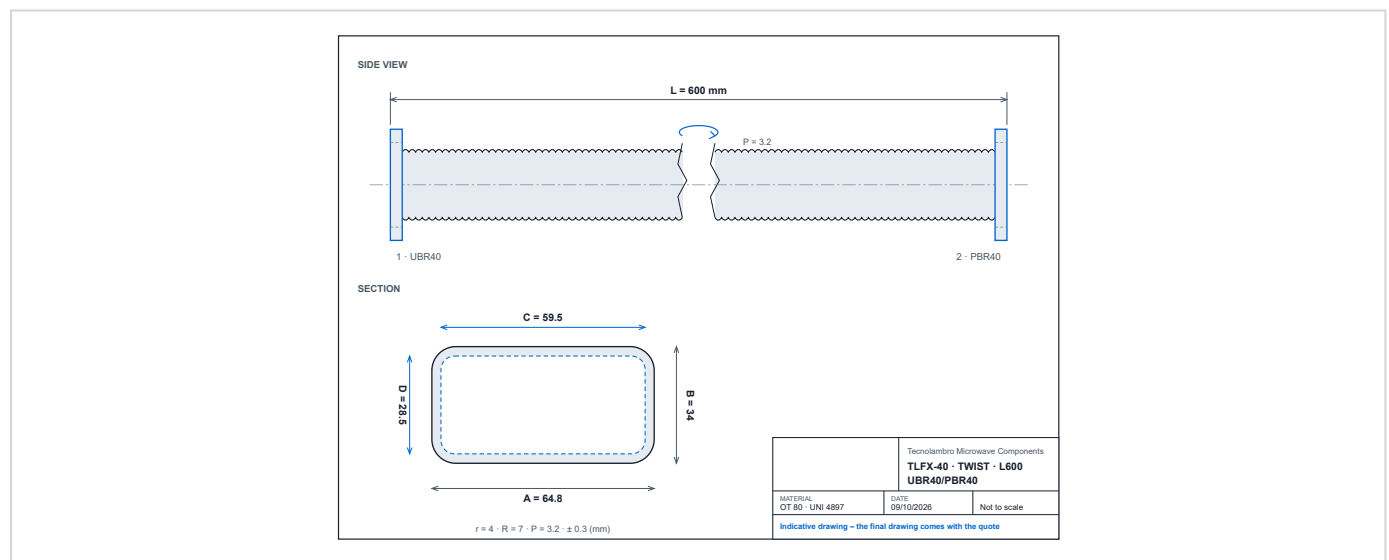

Indicative data: final values are stated in the quote.

**Request a quote: [tecnolambro.it/shop](https://tecnolambro.it/shop) · +39 375 577 1084**

TecnoLambro S.a.s. di Pasquini Marco & C. · Via degli Spinedi 20, 27010 Miradolo Terme (PV) · [info@tecnolambro.it](mailto:info@tecnolambro.it) · +39 375 577 1084

**ISO 9001:2015 · ISO 14001:2015**



Size page