

WR-28 flexible waveguide

The WR-28 flexible waveguide (R320 · WG22) covers 26.4–40.1 GHz. We build it twistable and seamless, with the flanges and length you need.

SIZE DATA

Operating band	26.4–40.1 GHz
Designations	WR-28 · R320 · WG22
Inner section a × b	7.11 × 3.56 mm
Code	TLFX-320
Overall A × B	9.6 × 5.8 mm
Corrugation root C × D	7.6 × 3.5 mm
Pitch P	1.2 mm
Tolerance	± 0.15 mm
Standard length	300 · 600 · 900 · 1,000 · 1,200 mm
Material	Brass OT 80 UNI 4897

Inner section a × b: standard EIA values. The other dimensions come from the Tecnolambro dimension table.

ELECTRICAL DATA · TWISTABLE

Return loss 300 mm	21.0 dB
Return loss 600 mm	19.7 dB
Return loss 1000 mm	18.8 dB
Attenuation	2.10 dB/m
CW power	75 W
Peak power	20 kW

ELECTRICAL DATA · SEAMLESS

VSWR 600 mm	1.20
Attenuation	1.60 dB/m
CW power	600 W
Peak power	20 kW


FLANGES

UBR320

PBR320

PDR320

TECHNICAL DRAWING

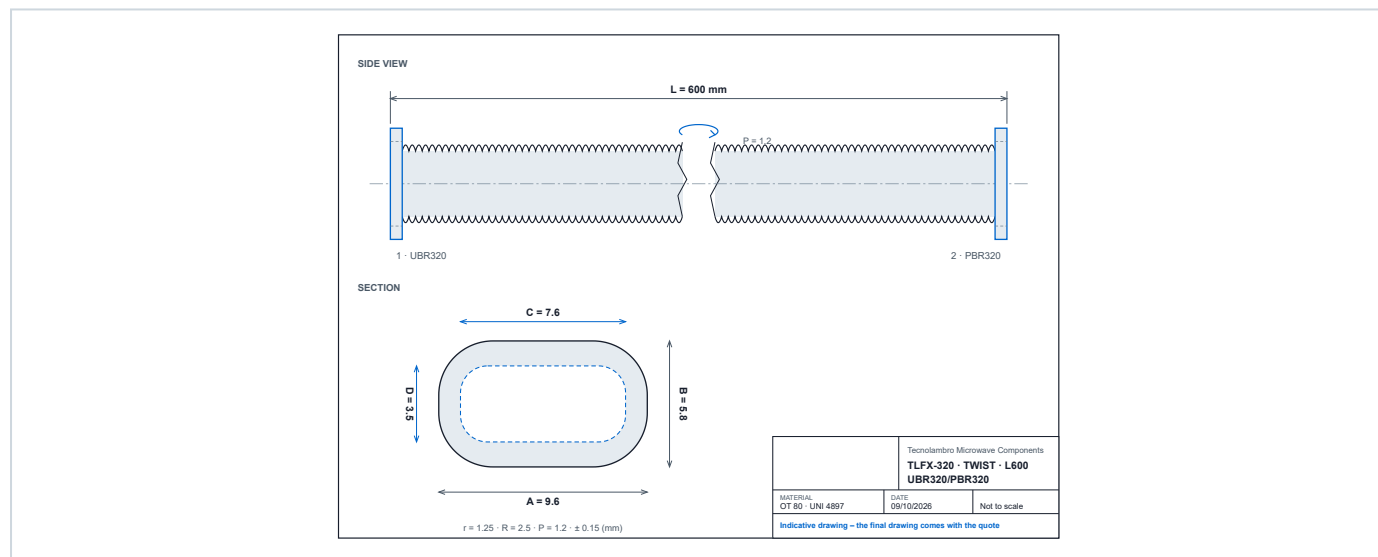

Indicative data: final values are stated in the quote.

Request a quote: tecnolambro.it/shop · +39 375 577 1084

Tecnolambro S.a.s. di Pasquini Marco & C. · Via degli Spinedi 20, 27010 Miradolo Terme (PV) · info@tecnolambro.it · +39 375 577 1084

ISO 9001:2015 · ISO 14001:2015



Size page