

WR-284 flexible waveguide

The WR-284 flexible waveguide (R32 · WG10) covers 2.6–3.95 GHz. We build it twistable and seamless, with the flanges and length you need.

SIZE DATA

Operating band	2.6–3.95 GHz
Designations	WR-284 · R32 · WG10
Inner section a × b	72.14 × 34.04 mm
Code	TLFX-32
Overall A × B	79.9 × 39.2 mm
Corrugation root C × D	73.5 × 33.1 mm
Pitch P	3.3 mm
Tolerance	± 0.30 mm
Standard length	300 · 600 · 900 · 1,000 · 1,200 mm
Material	Brass OT 80 UNI 4897

Inner section a × b: standard EIA values. The other dimensions come from the Tecnolambro dimension table.

ELECTRICAL DATA · TWISTABLE

Return loss 300 mm	30.7 dB
Return loss 600 mm	29.4 dB
Return loss 1000 mm	28.3 dB
Attenuation	0.12 dB/m
CW power	4,000 W
Peak power	2,000 kW

ELECTRICAL DATA · SEAMLESS

VSWR 600 mm	1.07
Attenuation	0.15 dB/m
CW power	10,000 W
Peak power	2,000 kW

FLANGES

UBR32

PBR32


PDR32

UDR32

CPR284F

CPR284G

TECHNICAL DRAWING

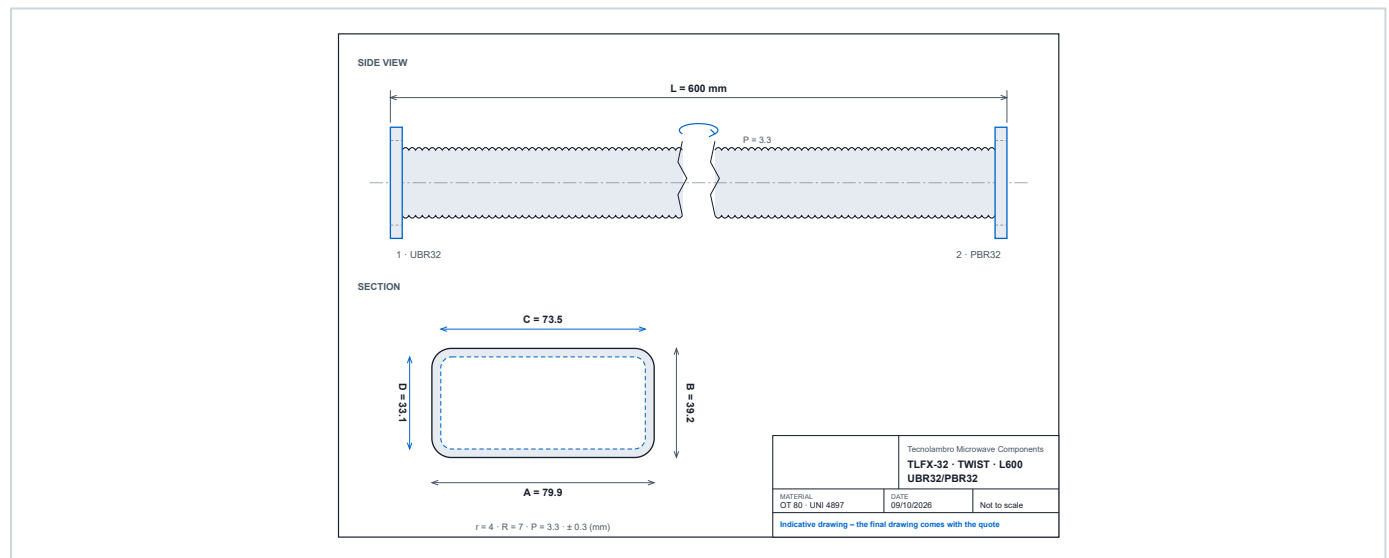

Indicative data: final values are stated in the quote.

Request a quote: tecnolambro.it/shop · +39 375 577 1084

Tecnolambro S.a.s. di Pasquini Marco & C. · Via degli Spinedi 20, 27010 Miradolo Terme (PV) · info@tecnolambro.it · +39 375 577 1084

ISO 9001:2015 · ISO 14001:2015



Size page