

WR-34 flexible waveguide

The WR-34 flexible waveguide (R260 · WG21) covers 21.7–33.0 GHz. We build it twistable and seamless, with the flanges and length you need.

SIZE DATA

Operating band	21.7–33.0 GHz
Designations	WR-34 · R260 · WG21
Inner section a × b	8.64 × 4.32 mm
Standard length	300 · 600 · 900 · 1,000 · 1,200 mm
Material	Brass OT 80 UNI 4897

Inner section a × b: standard EIA values. The other dimensions come from the Tecnolambro dimension table.

ELECTRICAL DATA · TWISTABLE

Return loss 300 mm	21.7 dB
Return loss 600 mm	20.8 dB
Return loss 1000 mm	19.4 dB
Attenuation	1.50 dB/m
CW power	85 W
Peak power	32 kW

ELECTRICAL DATA · SEAMLESS

Electrical data on request.


FLANGES

UBR260

PBR260

PDR260

TECHNICAL DRAWING

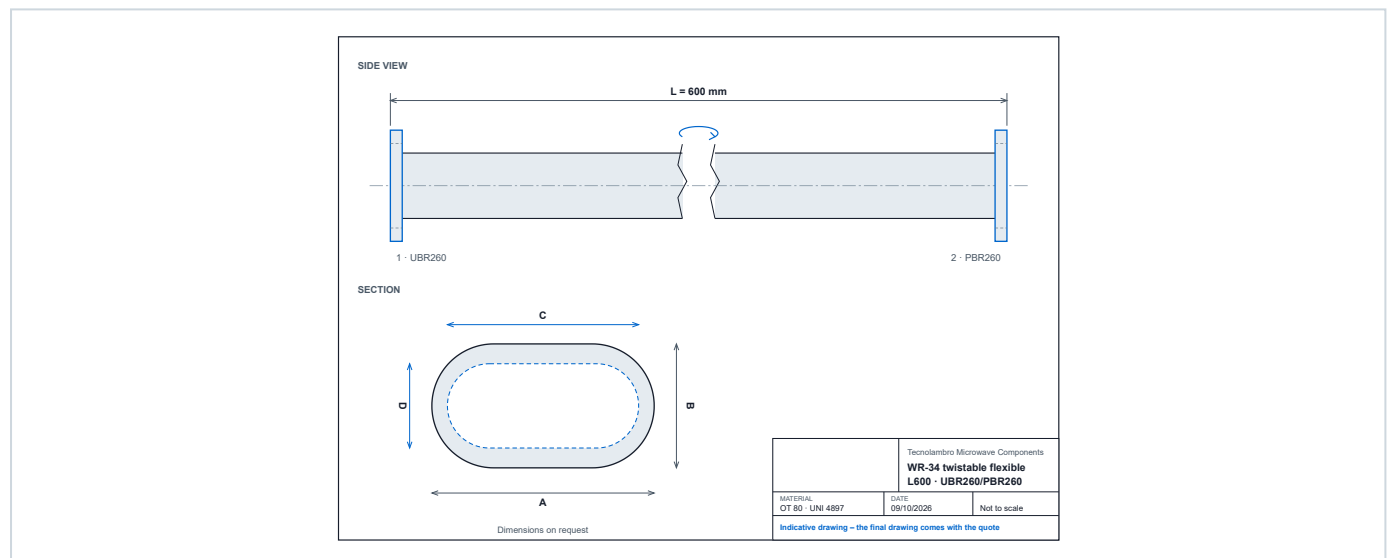

Indicative data: final values are stated in the quote.

Request a quote: tecnolambro.it/shop · +39 375 577 1084

Tecnolambro S.a.s. di Pasquini Marco & C. · Via degli Spinedi 20, 27010 Miradolo Terme (PV) · info@tecnolambro.it · +39 375 577 1084

ISO 9001:2015 · ISO 14001:2015



Size page