

WR-42 flexible waveguide

The WR-42 flexible waveguide (R220 · WG20) covers 17.6–26.7 GHz. We build it twistable and seamless, with the flanges and length you need.

SIZE DATA

Operating band	17.6–26.7 GHz
Designations	WR-42 · R220 · WG20
Inner section a × b	10.67 × 4.32 mm
Code	TLFX-220
Overall A × B	13.4 × 6.8 mm
Corrugation root C × D	11.0 × 4.0 mm
Pitch P	1.2 mm
Tolerance	± 0.15 mm
Standard length	300 · 600 · 900 · 1,000 · 1,200 mm
Material	Brass OT 80 UNI 4897

Inner section a × b: standard EIA values. The other dimensions come from the Tecnolambro dimension table.

ELECTRICAL DATA · TWISTABLE

Return loss 300 mm	23.0 dB
Return loss 600 mm	22.1 dB
Return loss 1000 mm	20.1 dB
Attenuation	1.20 dB/m
CW power	100 W
Peak power	42 kW

ELECTRICAL DATA · SEAMLESS

VSWR 600 mm	1.12
Attenuation	0.90 dB/m
CW power	800 W
Peak power	40 kW


FLANGES

UBR220

PBR220

PDR220

TECHNICAL DRAWING

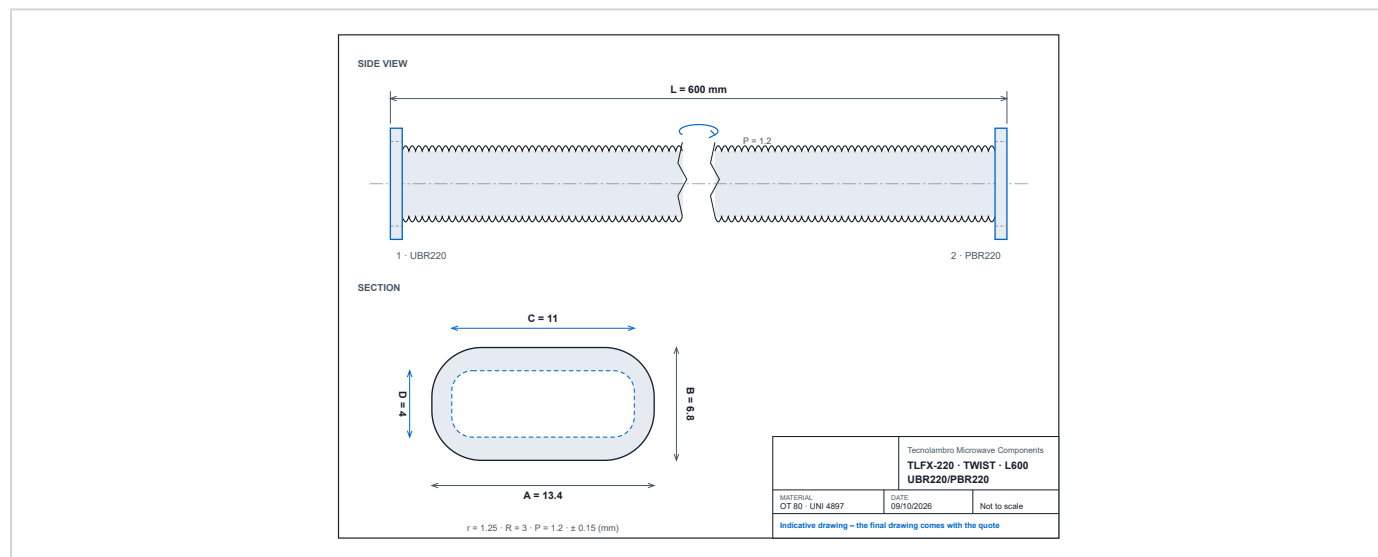

Indicative data: final values are stated in the quote.

Request a quote: tecnolambro.it/shop · +39 375 577 1084

Tecnolambro S.a.s. di Pasquini Marco & C. · Via degli Spinedi 20, 27010 Miradolo Terme (PV) · info@tecnolambro.it · +39 375 577 1084

ISO 9001:2015 · ISO 14001:2015



Size page