

WR-51 flexible waveguide

The WR-51 flexible waveguide (R180 · WG19) covers 14.5–22.0 GHz. We build it twistable and seamless, with the flanges and length you need.

SIZE DATA

Operating band	14.5–22.0 GHz
Designations	WR-51 · R180 · WG19
Inner section a × b	12.95 × 6.48 mm
Code	TLFX-180
Overall A × B	— × — mm
Corrugation root C × D	— × — mm
Pitch P	— mm
Tolerance	± 0.15 mm
Standard length	300 · 600 · 900 · 1,000 · 1,200 mm
Material	Brass OT 80 UNI 4897

Inner section a × b: standard EIA values. The other dimensions come from the Tecnolambro dimension table.

ELECTRICAL DATA · TWISTABLE

Return loss 300 mm	24.9 dB
Return loss 600 mm	23.7 dB
Return loss 1000 mm	23.1 dB
Attenuation	1.10 dB/m
CW power	200 W
Peak power	85 kW

ELECTRICAL DATA · SEAMLESS

VSWR 600 mm	1.08
Attenuation	0.60 dB/m
CW power	1,000 W
Peak power	70 kW


FLANGES

UBR180

PBR180

PDR180

TECHNICAL DRAWING

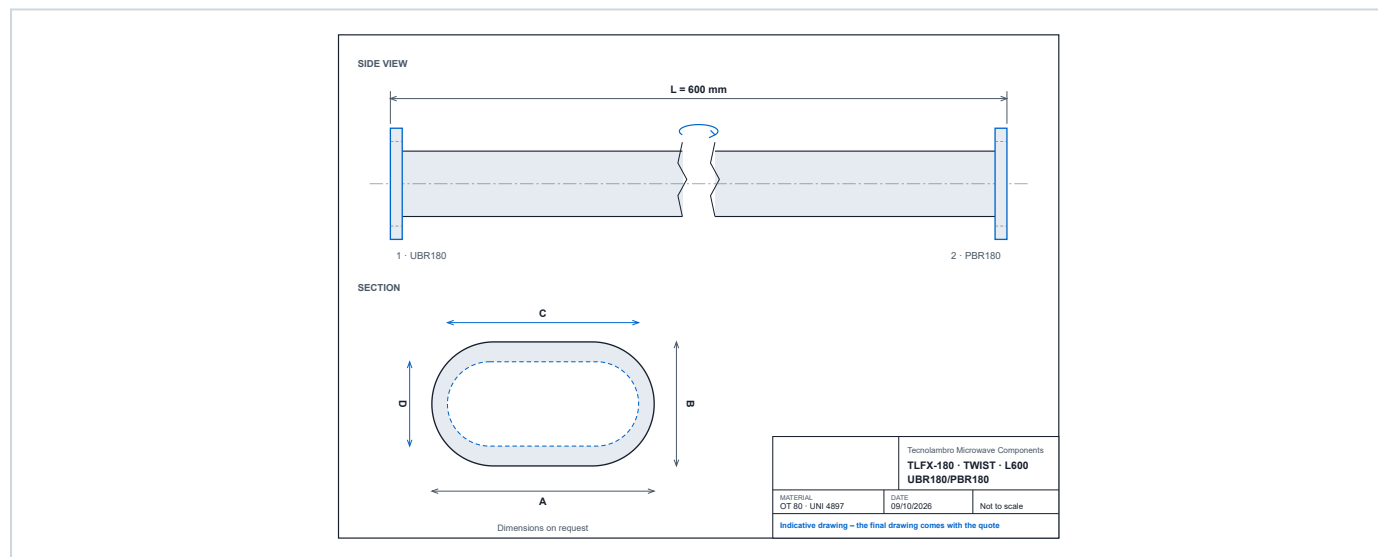

Indicative data: final values are stated in the quote.

Request a quote: tecnolambro.it/shop · +39 375 577 1084

Tecnolambro S.a.s. di Pasquini Marco & C. · Via degli Spinedi 20, 27010 Miradolo Terme (PV) · info@tecnolambro.it · +39 375 577 1084

ISO 9001:2015 · ISO 14001:2015



Size page