

WR-62 flexible waveguide

The WR-62 flexible waveguide (R140 · WG18) covers 11.9–18.0 GHz. We build it twistable and seamless, with the flanges and length you need.

SIZE DATA

Operating band	11.9–18.0 GHz
Designations	WR-62 · R140 · WG18
Inner section a × b	15.80 × 7.90 mm
Code	TLFX-140
Overall A × B	19.2 × 10.3 mm
Corrugation root C × D	16.5 × 7.4 mm
Pitch P	1.3 mm
Tolerance	± 0.15 mm
Standard length	300 · 600 · 900 · 1,000 · 1,200 mm
Material	Brass OT 80 UNI 4897

Inner section a × b: standard EIA values. The other dimensions come from the Tecnolambro dimension table.

ELECTRICAL DATA · TWISTABLE

Return loss 300 mm	27.3 dB
Return loss 600 mm	25.7 dB
Return loss 1000 mm	24.3 dB
Attenuation	0.90 dB/m
CW power	400 W
Peak power	115 kW

ELECTRICAL DATA · SEAMLESS

VSWR 600 mm	1.06
Attenuation	0.45 dB/m
CW power	1,500 W
Peak power	100 kW


FLANGES

UBR140

PBR140

PDR140

TECHNICAL DRAWING

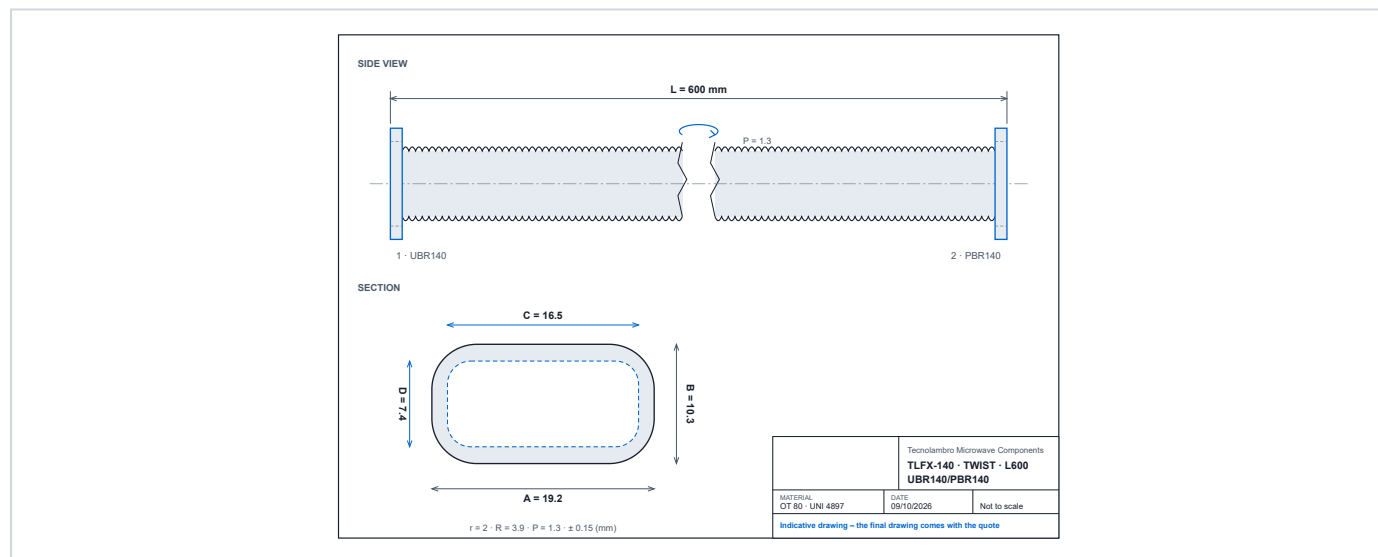

Indicative data: final values are stated in the quote.

Request a quote: tecnolambro.it/shop · +39 375 577 1084

Tecnolambro S.a.s. di Pasquini Marco & C. · Via degli Spinedi 20, 27010 Miradolo Terme (PV) · info@tecnolambro.it · +39 375 577 1084

ISO 9001:2015 · ISO 14001:2015



Size page