

WR-75 flexible waveguide

The WR-75 flexible waveguide (R120 · WG17) covers 9.84–15.0 GHz. We build it twistable and seamless, with the flanges and length you need.

SIZE DATA

Operating band	9.84–15.0 GHz
Designations	WR-75 · R120 · WG17
Inner section a × b	19.05 × 9.53 mm
Code	TLFX-120
Overall A × B	22.7 × 12.2 mm
Corrugation root C × D	20.0 × 9.4 mm
Pitch P	1.3 mm
Tolerance	± 0.15 mm
Standard length	300 · 600 · 900 · 1,000 · 1,200 mm
Material	Brass OT 80 UNI 4897

Inner section a × b: standard EIA values. The other dimensions come from the Tecnolambro dimension table.

ELECTRICAL DATA · TWISTABLE

Return loss 300 mm	27.3 dB
Return loss 600 mm	25.7 dB
Return loss 1000 mm	24.9 dB
Attenuation	0.55 dB/m
CW power	750 W
Peak power	120 kW

ELECTRICAL DATA · SEAMLESS

VSWR 600 mm	1.06
Attenuation	0.40 dB/m
CW power	2,000 W
Peak power	140 kW


FLANGES

UBR120

PBR120

PDR120

TECHNICAL DRAWING

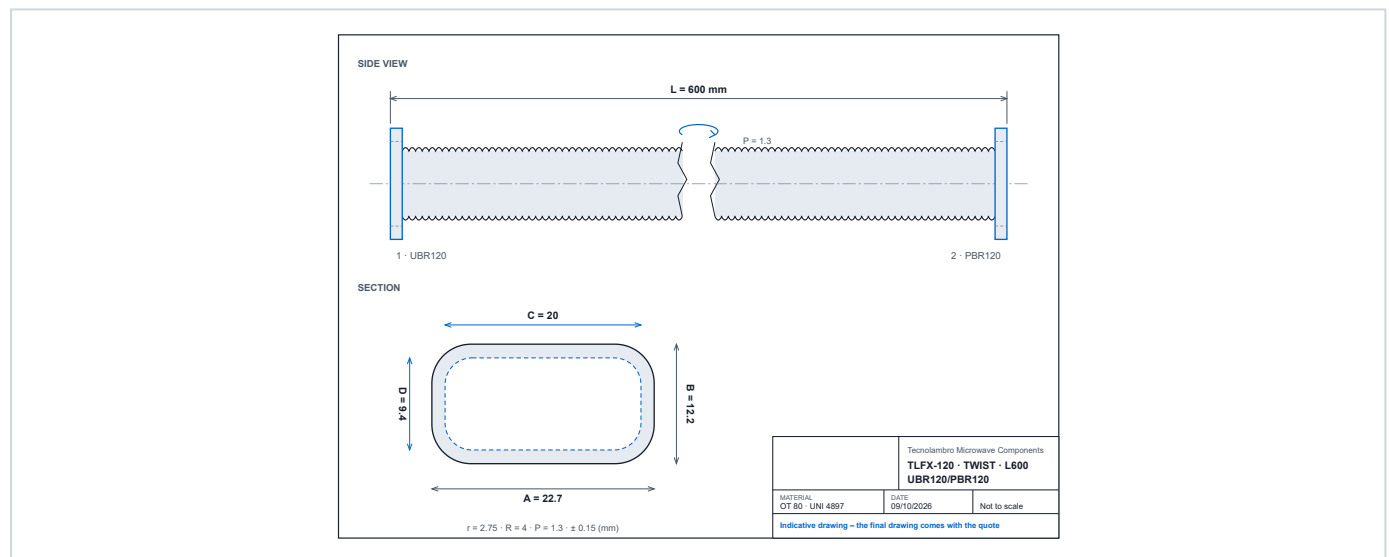

Indicative data: final values are stated in the quote.

Request a quote: tecnolambro.it/shop · +39 375 577 1084

Tecnolambro S.a.s. di Pasquini Marco & C. · Via degli Spinedi 20, 27010 Miradolo Terme (PV) · info@tecnolambro.it · +39 375 577 1084

ISO 9001:2015 · ISO 14001:2015



Size page