


Disassati

Disassati in guida d'onda rigida per collegare flange sfalsate, in piano E o in piano H, con disassamento e lunghezza su misura.

MISURE DISPONIBILI

Misura	Frequenza (GHz)	IEC	WG
WR-22	33,0–50,1	R400	WG23
WR-28	26,4–40,1	R320	WG22
WR-34	21,7–33,0	R260	WG21
WR-42	17,6–26,7	R220	WG20
WR-51	14,5–22,0	R180	WG19
WR-62	11,9–18,0	R140	WG18
WR-75	9,84–15,0	R120	WG17
WR-90	8,2–12,5	R100	WG16
WR-112	6,58–10,0	R84	WG15
WR-137	5,38–8,18	R70	WG14
WR-159	4,64–7,05	R58	WG13
WR-187	3,94–5,99	R48	WG12
WR-229	3,22–4,9	R40	WG11A
WR-284	2,6–3,95	R32	WG10

DISEGNO TECNICO · WR-90

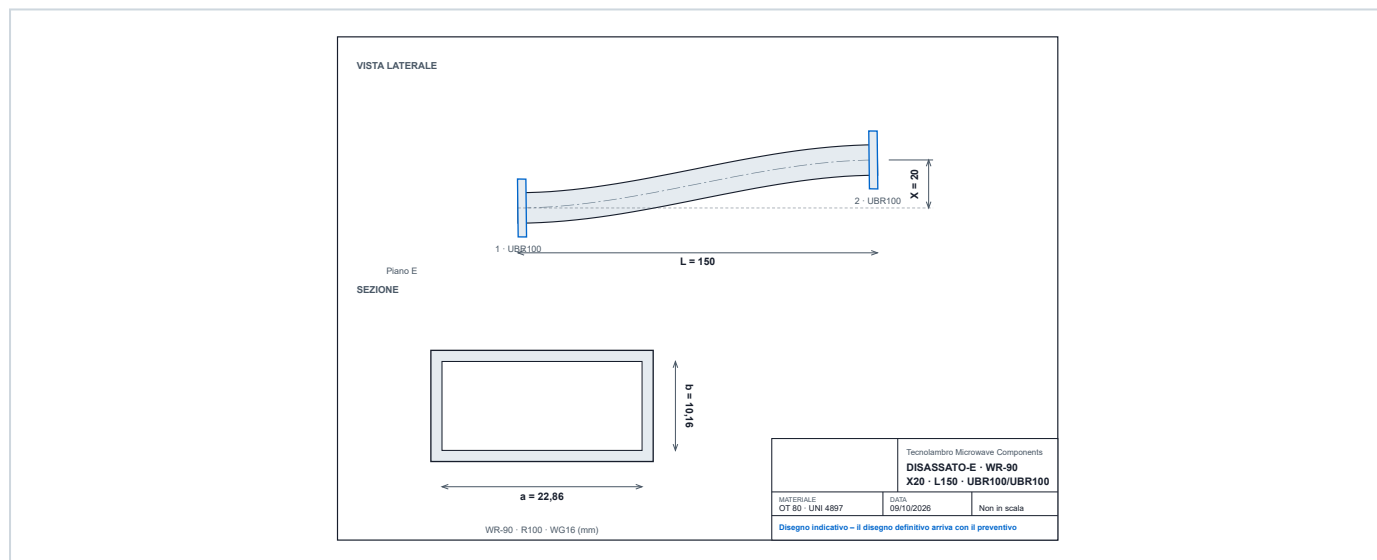

Dati indicativi: i valori definitivi sono nel preventivo.

Richiedi un preventivo: tecnolambro.it/shop · +39 375 577 1084

Tecnolambro S.a.s. di Pasquini Marco & C. · Via degli Spinedi 20, 27010 Miradolo Terme (PV) · info@tecnolambro.it · +39 375 577 1084

ISO 9001:2015 · ISO 14001:2015



Pagina del
prodotto