
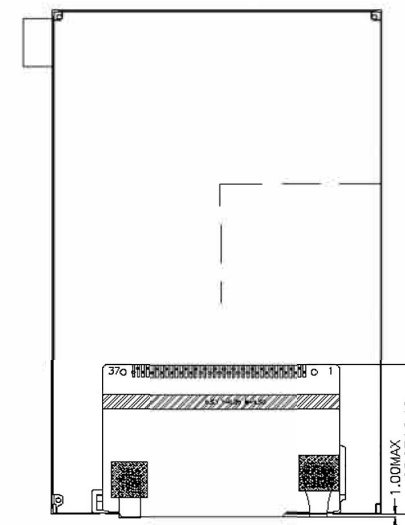
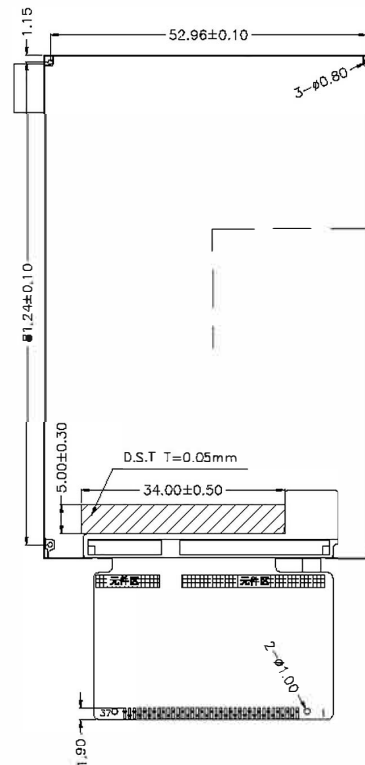
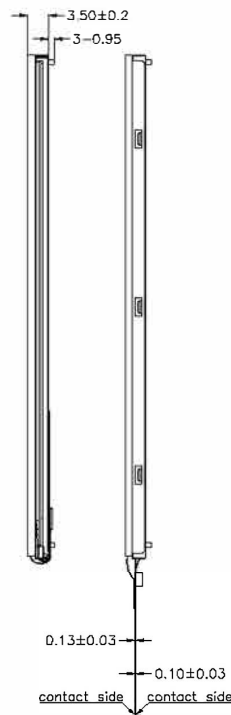



Customer Approved  
(客户确认回签)

版本	更改内容	拟定	日期
V0	首版发行	DJH	2017.03.31

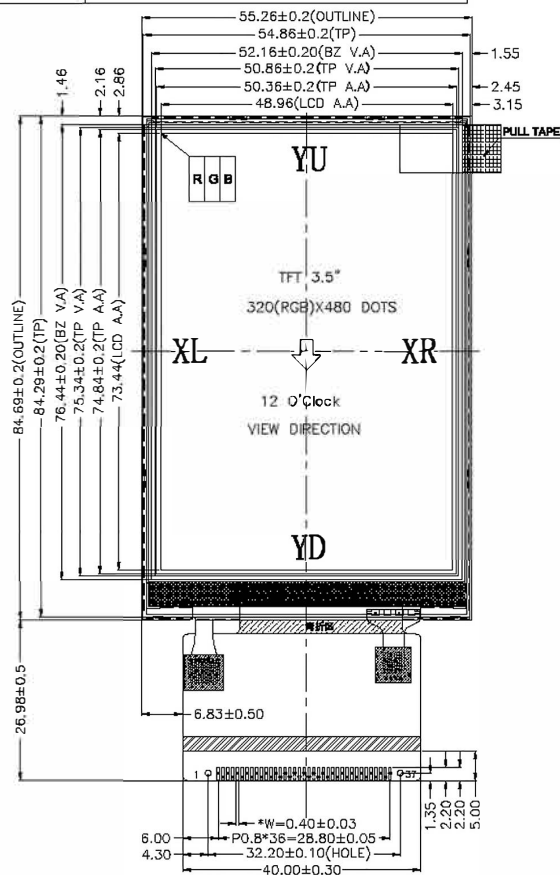


FPC折弯后示意图

PIN FUNCTION	
No.	SYMBOL
1	GND
2	VDD
3	IOVCC
4	CS
5	RS
6	WR
7	RD
8	RESET
9	DB0
10	DB1
11	DB2
12	DB3
13	DB4
14	DB5
15	DB6
16	DB7
17	DB8
18	DB9
19	DB10
20	DB11
21	DB12
22	DB13
23	DB14
24	DB15
25	FMARK
26	COM1/Y-/YD
27	SEG1/X-/XR
28	COM1/Y+/YU
29	SEG2/X+/XL
30	LED-K1
31	LED-K2
32	LED-K3
33	LED-K4
34	LED-K5
35	LED-K6
36	LED-A
37	GND



Pixels Detail  
SCALE 50:1



第三视角:



DISPLAY TYPE:	3.5" TFT	DISPLAY DRIVER:	NT35310	PIXEL PITCH:	0.153 X 0.153 mm
POLARIZER MODE:	TRANSMISSIVE	OPERATING TEMP:	-20°C TO +70°C	LCM BRIGHTNESS (CD/M <sup>2</sup> ):	200 cd/m <sup>2</sup>
VIEWING DIRECTION:	12 O'CLOCK	STORAGE TEMP:	-30°C TO +80°C	BACK LIGHT:	LED WHITE(X6), 并联
Dot matrix:	320(RGB)X480 DOTS	STRUCTURE:	LCD+IC+FPC+BL	MATERIAL NOTE	ROHS REQUEST

产品型号:		ATK-35039_V2			
部品型号:		LCM外形图		确认:	Henry
版本:	V2	单位:	mm	审核:	Liwen
日期:	2017.03.31	比例:	1:1	设计:	Jason
UNMARKED TOLERANCE: ±0.30 mm			页码:	1 OF 1	

THIS DRAWING IS PROPERTY OF WKS CO. LTD, IT CANNOT BE REPRODUCED WITHOUT PERMISSION.