


Grove - Relay

From Wiki 来自痴汉的爱

Contents

- 1 Introduction
- 2 Specifications
- 3 Usage
 - 3.1 With TI LaunchPad
 - 3.2 With Arduino
 - 3.3 With Raspberry Pi
 - 3.3.1 Run the program
- 4 Resources

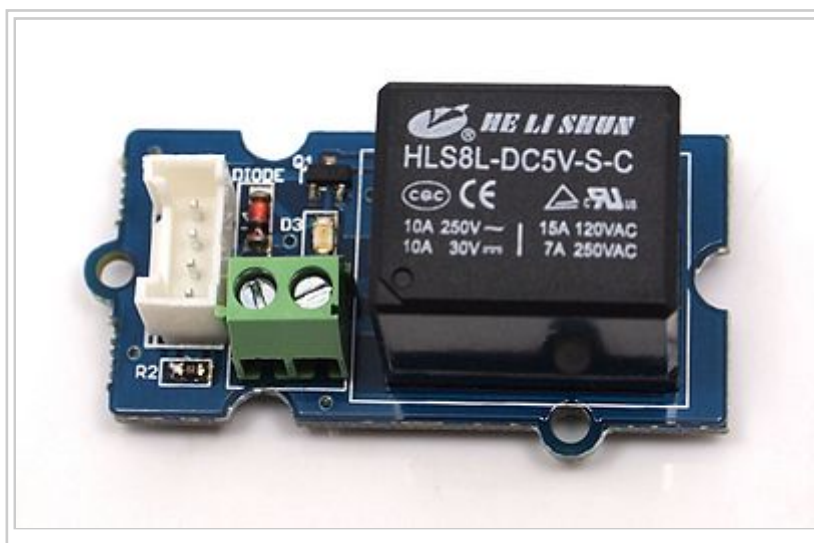

Introduction

The Grove-Relay module is a digital normally-open switch. Through it, you can control circuit of high voltage with low voltage, say 5V on the controller. There is an indicator LED on the board, which will light up when the controlled terminals get closed.

Specifications


Parameter	v1.1	v1.2
Product Release Date	27th Jan 2013	9th June 2014
Operating Voltage	5V	3.3V~5V
Operating Current	60mA	100mA
Relay Life	100,000 Cycle	100,000 Cycle
Max Switching Voltage	250VAC/30VDC	250VAC/30VDC
Max Switching Current	5A	5A

Usage

With TI LaunchPad

Controlling other electronics (Relay)

This example showcases how to use the Grove-relay module to control larger load, i.e. a desk lamp light. A 3V voltage signal can cause the relay to switch on, allowing current to flow through the connected appliance.

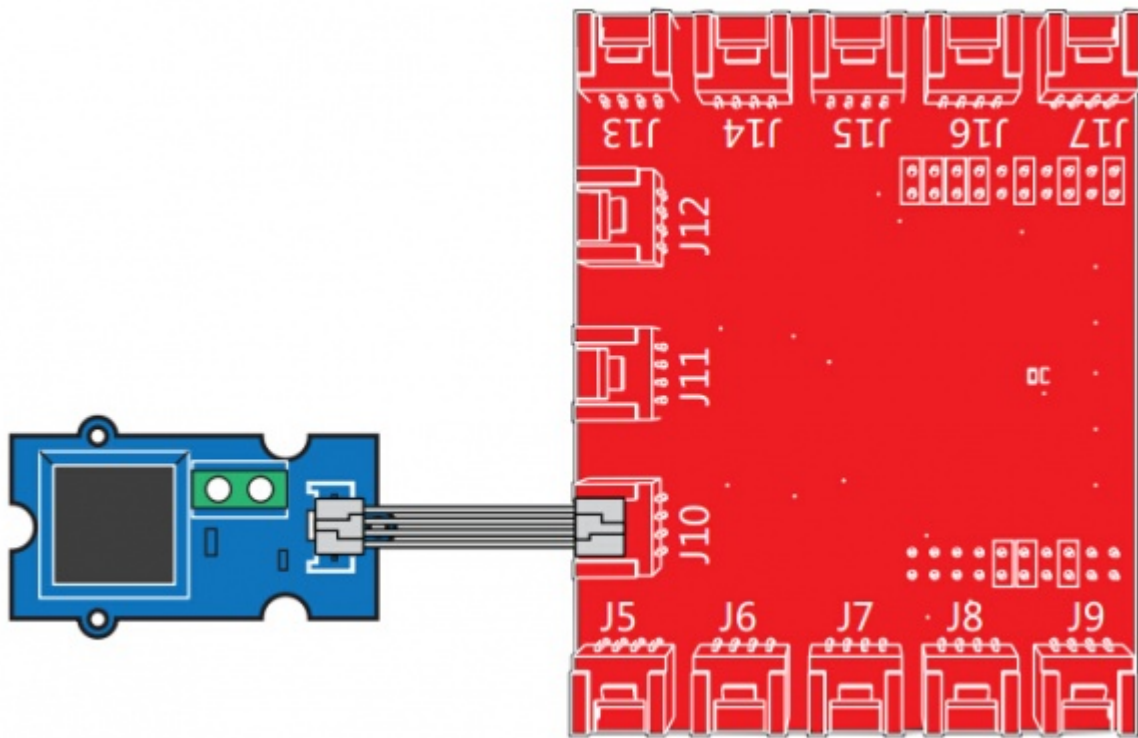


```
/*
Relay
The basic Energia example.
This example code is in the public domain.
*/

#define RELAY_PIN 39

// the setup routine runs once when you press reset:
void setup() {
    pinMode(RELAY_PIN, OUTPUT); // initialize the digital pin as an output.
}

// the loop routine runs over and over again forever:
void loop() {
    digitalWrite(RELAY_PIN, HIGH); // turn the relay on (HIGH is the voltage level)
    delay(1000); // wait for a second
    digitalWrite(RELAY_PIN, LOW); // turn the relay o by making the voltage LOW
    delay(1000); // wait for a second
}
```

With Arduino

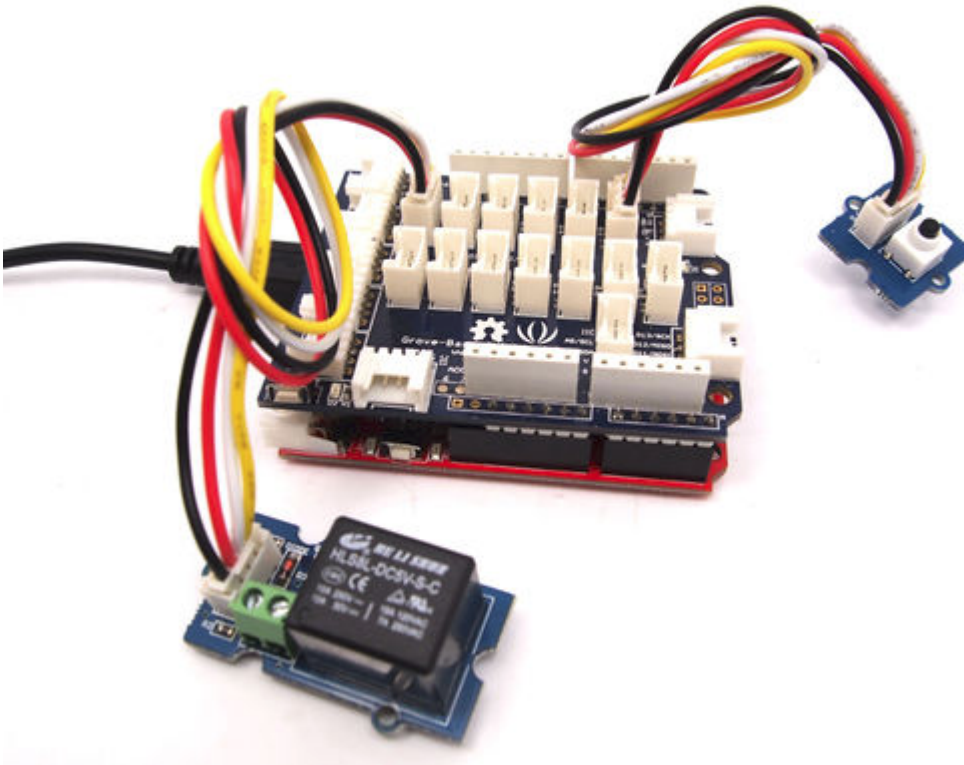


Below is a demo that shows you how to control a Grove - Relay with a Grove - Button. When the button gets pressed, the relay will close.

```
// Project Five - Relay Control
//
void setup()
{
  pinMode(1, INPUT);
  pinMode(2, INPUT);
  pinMode(6, OUTPUT);
}

void loop()
{
  if (digitalRead(1)==HIGH)
  {
    digitalWrite(6, HIGH);
    delay(100);
  }
  if (digitalRead(2)==HIGH)
  {
    digitalWrite(6, LOW);
  }
}
```

With Raspberry Pi

This sample is show you how to use Grove - Relay by Raspberry Pi . The demo below will show that the relay be control by Grove -Button.

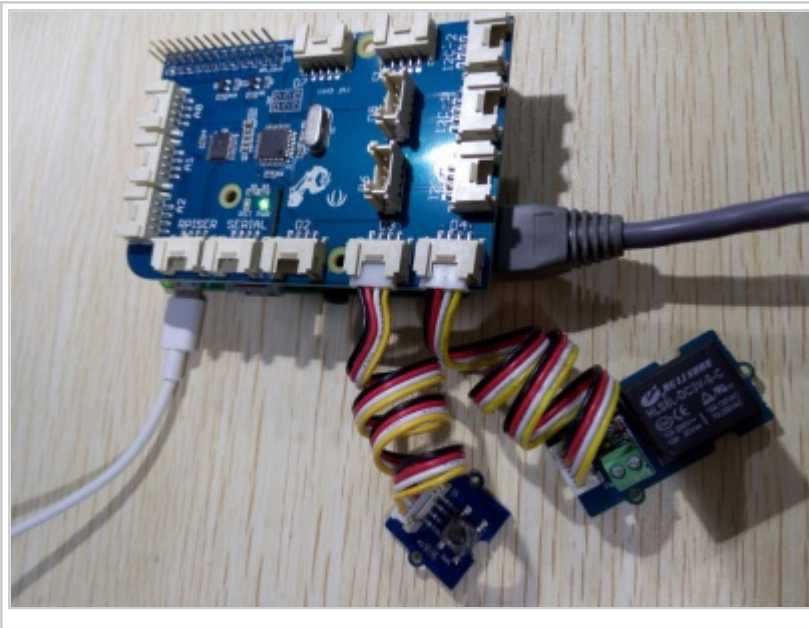

```
# Raspberry Pi + Grove Switch + Grove Relay
import time
import grovepi
# Connect the Grove Switch to digital port D3
# SIG,NC,VCC,GND
switch = 3
# Connect the Grove Relay to digital port D4
# SIG,NC,VCC,GND
relay = 4
grovepi.pinMode(switch,"INPUT")
grovepi.pinMode(relay,"OUTPUT")
while True:
    try:
        if grovepi.digitalRead(switch):
            grovepi.digitalWrite(relay,1)
        else:
            grovepi.digitalWrite(relay,0)
            time.sleep(.05)
    except KeyboardInterrupt:
        grovepi.digitalWrite(relay,0)
        break
    except IOError:
        print "Error"
```

Run the program

- Find the path to the file(According to your own path)

```
cd GrovePi/Software/Python/
```

- Run Program

```
sudo python grove_switch_relay.py
```

Resources

- Grove - Relay Eagle File (http://www.seeedstudio.com/wiki/File:Grove-Relay_Eagle_Files.zip)
- Relay_Datasheet (http://www.seeedstudio.com/wiki/File:Relay_Datasheet.pdf)
- how to upload code (http://www.seeedstudio.com/wiki/Upload_Code)
- Buy it (http://www.seeedstudio.com/depot/grove-relay-p-769.html?cPath=39_42)
- **Wiki in PDF Format** (<http://www.seeedstudio.com/wiki/images/e/e6/103020005.pdf>)

Retrieved from "http://wiki.seeedstudio.com/index.php?title=Grove_-_Relay&oldid=110452"

Categories: [LaunchPad Instructions](#) | [Arduino Instructions](#) | [RaspberryPi Instructions](#) | [Grove](#) | [Grove Digital Twig](#)

-
- This page was last modified on 25 November 2015, at 06:23.
 - This page has been accessed 54,984 times.