



Configuration

- MiddleWares
 - FATFS
 - FREERTOS
 - USB_DEVICE
- Peripherals
 - ADC1
 - ADC2
 - CAN
 - CRC
 - I2C1
 - I2C2
 - I2C I2C
 - IWDG
 - RCC
 - High Speed Clock (HSE) Crystal/Ceramic...
 - Low Speed Clock (LSE) Disable
 - Master Clock Output
 - RTC
 - SPI1
 - SPI2
 - SYS
 - TIM1
 - TIM2
 - TIM3
 - Slave Mode Disable
 - Trigger Source Disable
 - Internal Clock
 - Channel1 Disable
 - Channel2 Disable
 - Channel3 Disable
 - Channel4 Disable
 - Combined Channels Disable
 - XOR activation
 - One Pulse Mode
 - TIM4
 - USART1
 - USART2
 - USART3
 - USB
 - WWDG

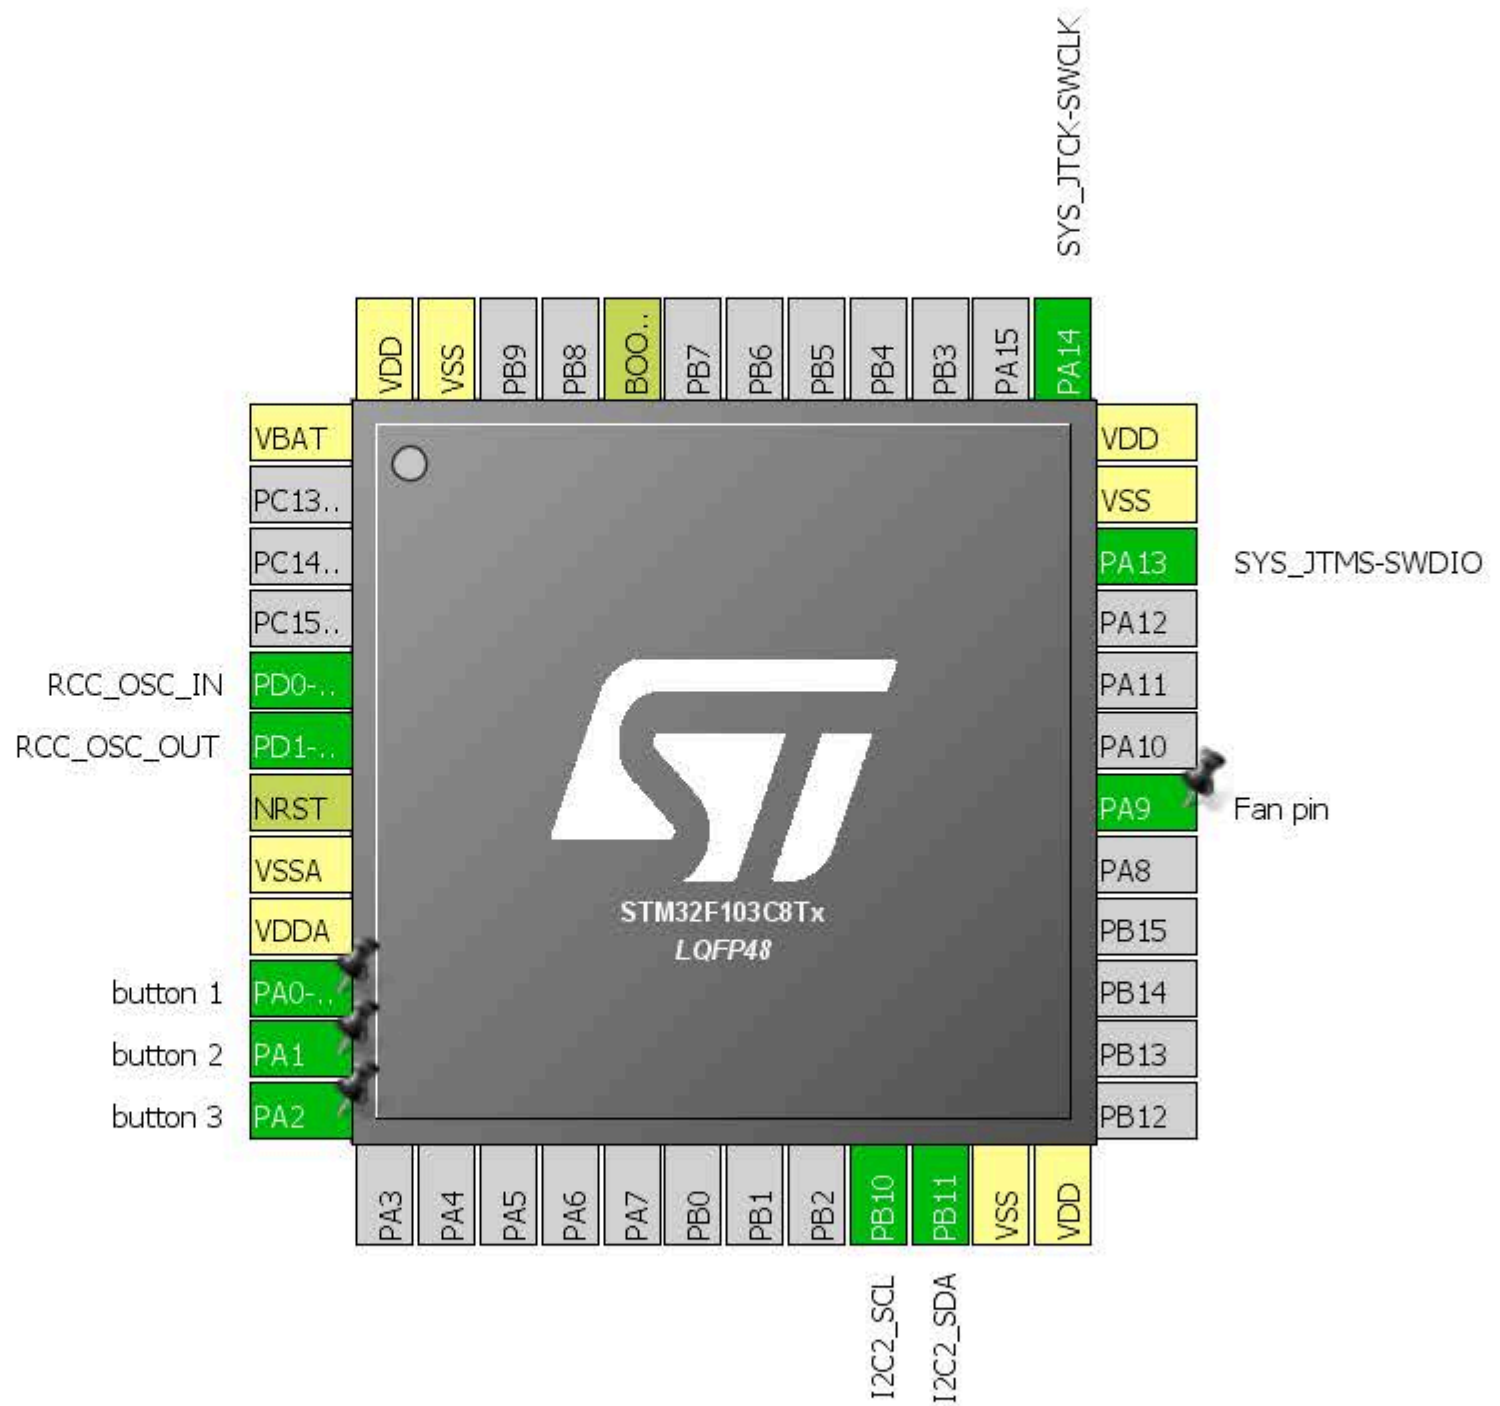

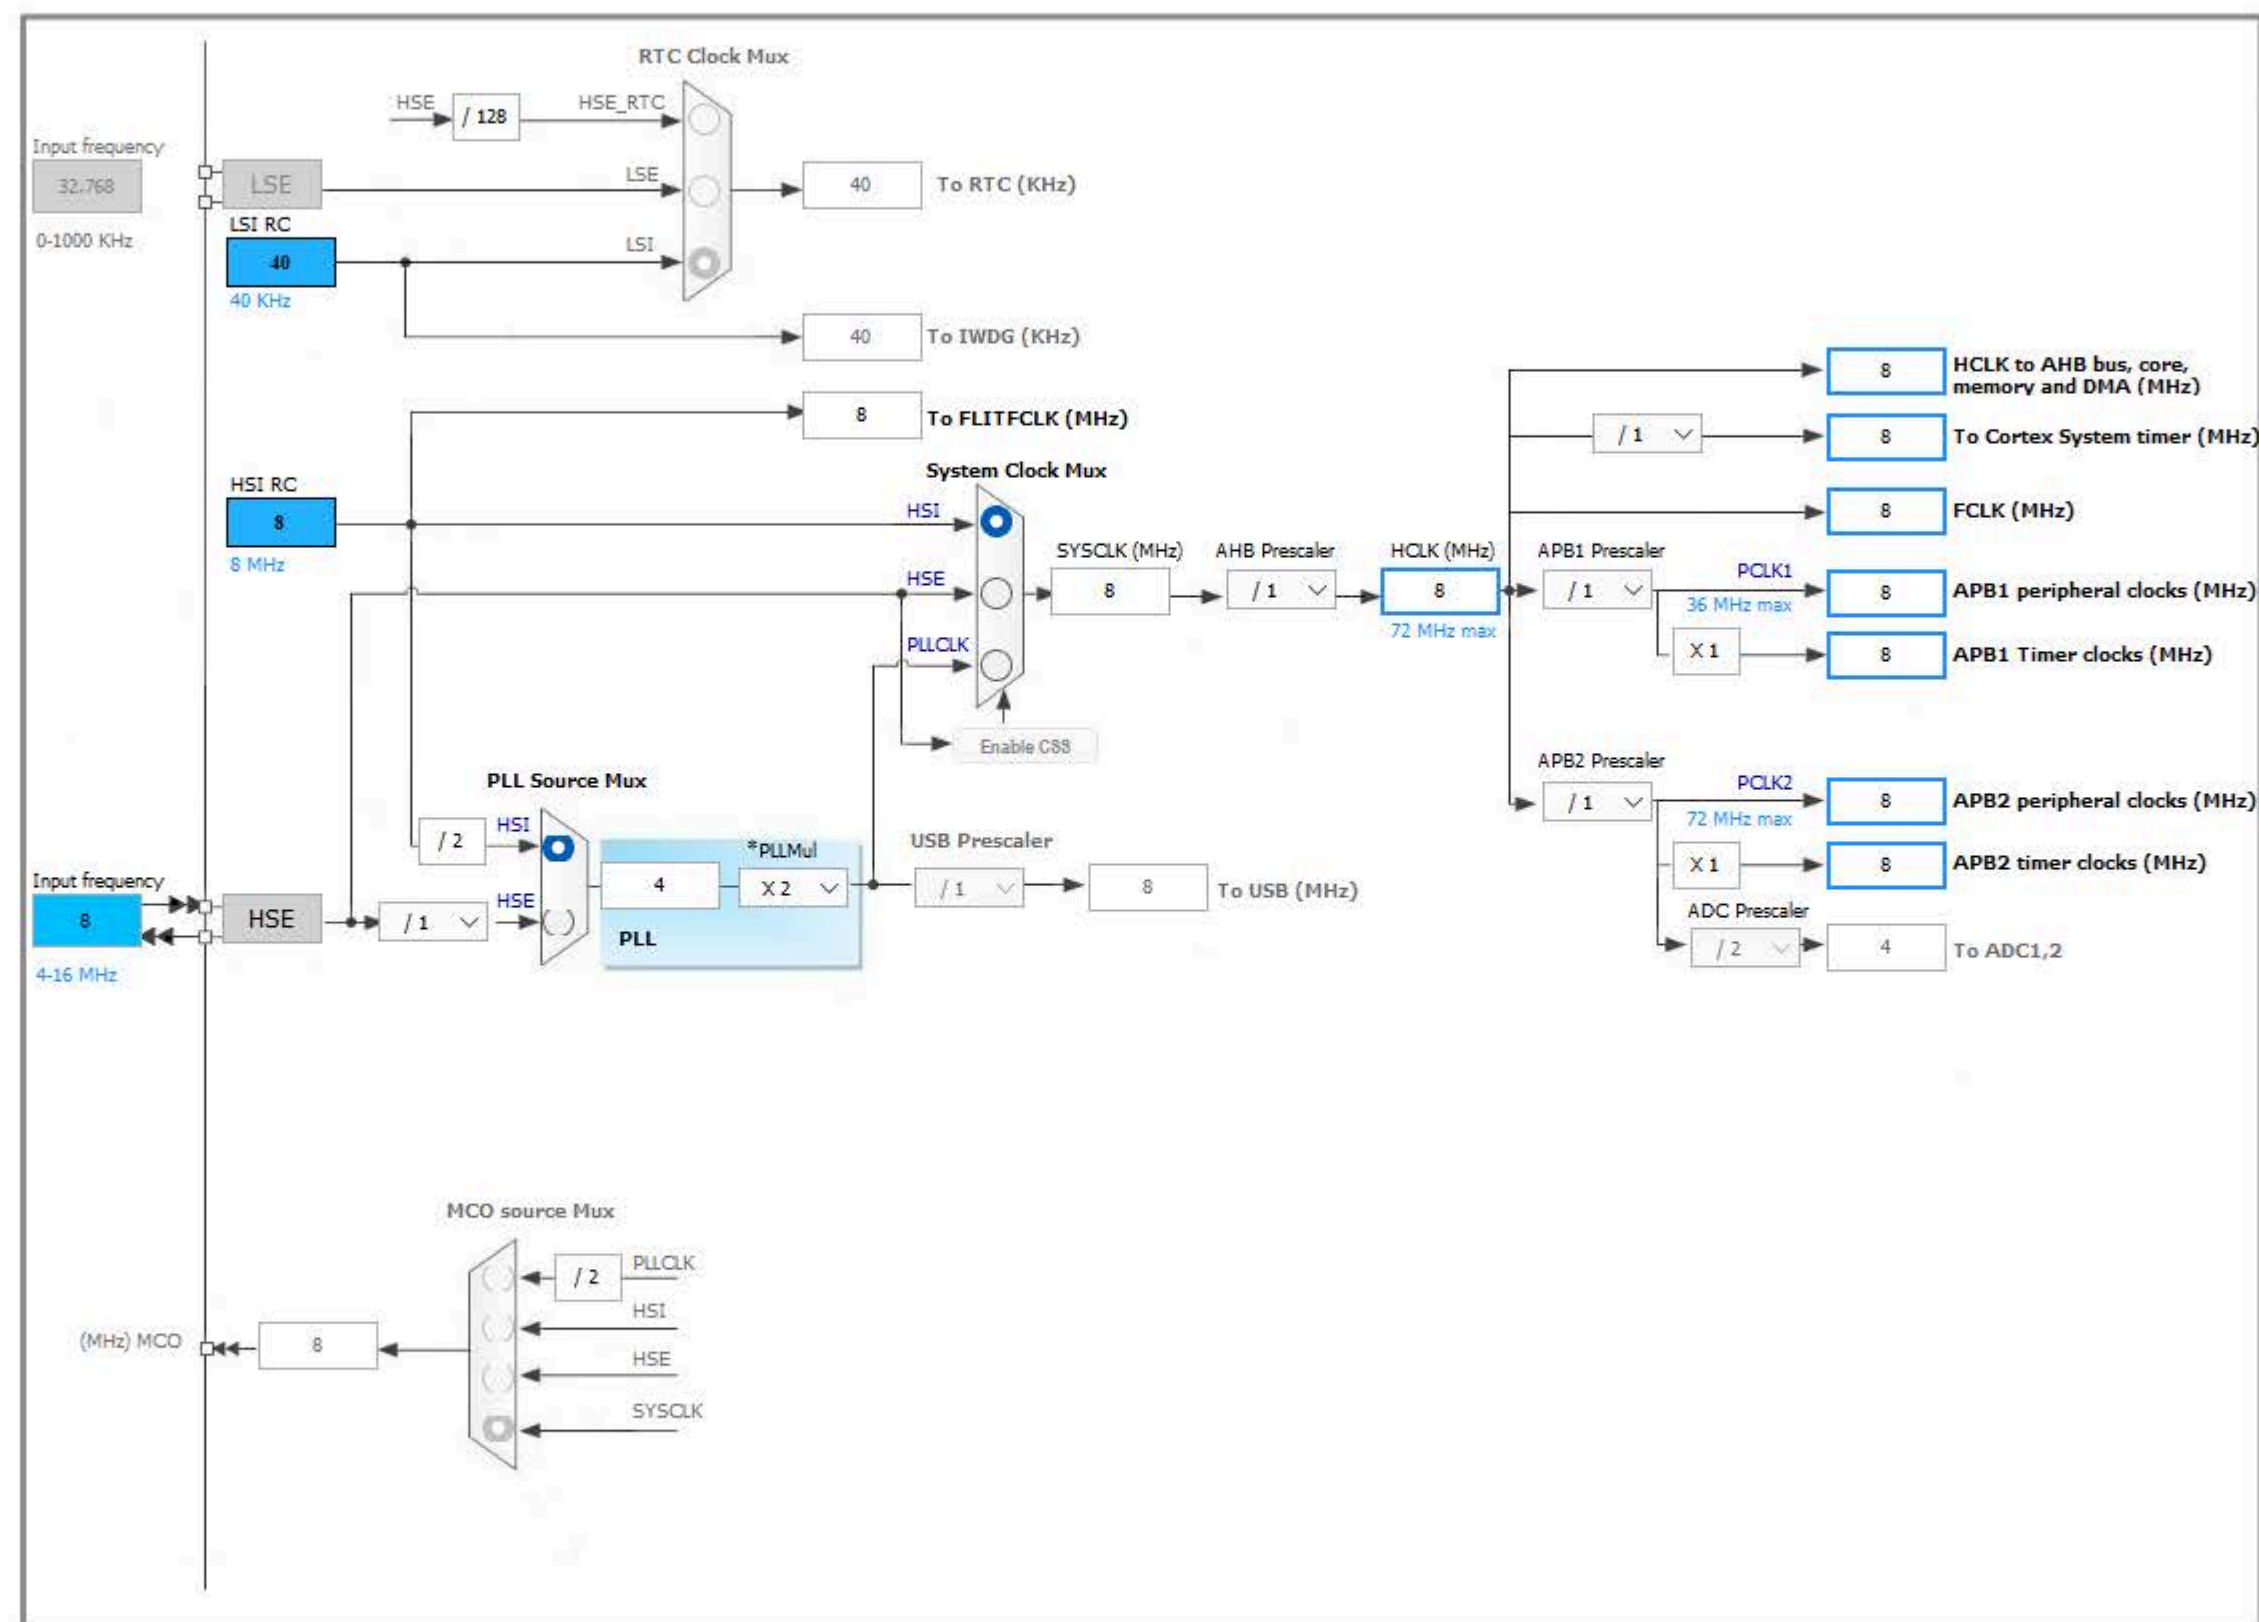

Configuration

MiddleWares

- FATFS**
 - ☐ User-defined
- FREERTOS**
 - ☐ Enabled

Peripherals

- CRC**
 - ☐ Activated
- I2C2**
 - I2C:I2C
- IWDG**
 - ☐ Activated
- RCC**
 - High Speed Clock (HS)
- SYS**
 - Debug: Serial Wire
 - Timebase Source: Sys
- TIM3**
 - Internal Clock: Set
- WWDG**
 - ☐ Activated

NVIC Configuration

☒ NVIC ☒ Code generation

Priority Group: 4 bits for pre-emption priority 0 bits f...
☐ Sort by Preemption Priority and Sub Priority

Search: ☐ Show only enabled interrupts

Interrupt Table	Enabled	Preemption Priority	Sub Priority
Non maskable interrupt	☒	0	0
Hard fault interrupt	☒	0	0
Memory management fault	☒	0	0
Prefetch fault, memory access fault	☒	0	0
Undefined instruction or illegal state	☒	0	0
System service call via SWI instruction	☒	0	0
Debug monitor	☒	0	0
Pendable request for system service	☒	0	0
Time base: System tick timer	☒	0	0
PVD interrupt through EXTI line 16	☐	0	0
Flash global interrupt	☐	0	0
RCC global interrupt	☐	0	0
TIM3 global interrupt	☒	0	0
I2C2 event interrupt	☐	0	0
I2C2 error interrupt	☐	0	0

☐ Enabled Preemption Priority: Sub Priority:

Configuration

- MiddleWares
 - FATFS
 - User-defined
 - FREERTOS
 - Enabled
- Peripherals
 - CRC
 - Activated
 - I2C2
 - I2C:I2C
 - IWDG
 - Activated
 - RCC
 - High Speed Clock (HS)
 - SYS
 - Debug: Serial Wire
 - Timebase Source: Sys
 - TIM3
 - Internal Clock: Set
 - WWDG
 - Activated

RCC Configuration

Parameter Settings User Constants NVIC Settings GPIO Settings

Configure the below parameters :

Search : Search (Ctrl+F)

System Parameters	
VDD voltage (V)	3.3 V
Prefetch Buffer	Enabled
Flash Latency(WS)	0 WS (1 CPU cycle)
RCC Parameters	
HSI Calibration Value	16
HSE Startup Timeout Value (ms)	100
LSE Startup Timeout Value (ms)	5000

Restore Default Apply Ok Cancel

Middlewares

Connectivity	Analog	System	Control
I2C2		DMA GPIO NVIC RCC	TIM3

Configuration

MiddleWares

FATFS

User-defined

FREERTOS

Enabled

Peripherals

CRC

Activated

I2C2

I2C:I2C

IWDG

Activated

RCC

High Speed Clock

SYS

Debug:Serial

Timebase So

TIM3

Internal Clock

WWDG

Activated

TIM3 Configuration

Parameter Settings

User Constants

NVIC Settings

DMA Settings

Configure the below parameters :

Search :

Counter Settings

Prescaler (PSC - 16 bits value)

7999

Counter Mode

Up

Counter Period (AutoReload Register - 16...

499

Internal Clock Division (CKD)

No Division

auto-reload preload

Disable

Trigger Output (TRGO) Parameters

Master/Slave Mode

Disable (no sync between this TIM (Master) and its ...

Trigger Event Selection

Reset (UG bit from TIMx_EGR)

Restore Default

Apply

Ok

Cancel

Middlewares

Connectivity

Analog

System

Control

C2

bus

✓

DMA

+

GPIO

✓

NVIC

✓

RCC

✓

TIM3

✓

Configuration

MiddleWares

FATFS

User-defined

FREERTOS

Enabled

Peripherals

CRC

Activated

I2C2

I2C:I2C

IWDG

Activated

RCC

High Speed Clock (HS)

SYS

Debug:Serial Wire

Timebase Source:Sys

TIM3

Internal Clock: Set

WWDG

Activated

Pin Configuration

GPIO I2C2 RCC SYS

Search Signals

Search (Ctrl+F)

Show only Modified Pins

Pin Name	Signal on Pin	GPIO output...	GPIO mode	GPIO Pull-u...	Maximum ...	User Label	Modified
PA0-WKUP	n/a	n/a	Input mode	Pull-up	n/a	button 1	✓
PA1	n/a	n/a	Input mode	Pull-up	n/a	button 2	✓
PA2	n/a	n/a	Input mode	Pull-up	n/a	button 3	✓
PA9	n/a	Low	Output Push...	n/a	Low	Fan pin	✓

Select Pins from table to configure them. Multiple selection is Allowed.

Group By Peripherals

Apply Ok Cancel

Middlewares

Analog

System

Control

DMA

GPIO

NVIC

RCC

TIM3

Configuration

MiddleWares

FATFS

Enabled

FREERTOS

Enabled

Peripherals

CRC

Activated

I2C2

I2C:I2C

IWDG

Activated

RCC

High Speed C

SYS

Debug:Serial

Timebase So

TIM3

Internal Cloc

WWDG

Activated

I2C2 Configuration

Parameter Settings User Constants NVIC Settings DMA Settings GPIO Settings

Configure the below parameters :

Search : Search (Ctrl+F)

Master Features

I2C Speed Mode Standard Mode

I2C Clock Speed (Hz) 100000

Slave Features

Clock No Stretch Mode Disabled

Primary Address Length selection 7-bit

Dual Address Acknowledged Disabled

Primary slave address 0

General Call address detection Disabled

Restore Default Apply Ok Cancel

Middlewares

Connectivity

Analog

System

Control

I2C2

DMA

GPIO

NVIC

RCC

TIM3