




Arduino relay board
with four channels.




LED Status



DS18x20 Tempsensor



Regulated 5V input required.



Button




| | |
|-------------|----------------------------------------------|
| Status LED: | |
| On | Ready, Automatic Mode |
| Blink | No Connection |
| Off | Manually On, Relay-Board -> All LEDs on |
| Off | Manually Off, Relay-Board -> All LEDs off |

```

Button:
-> Push -> Auto, Scene 1
    |
    v
    Push -> Auto, Scene 2
    |
    v
    <- ...

-> Long Push -> Manually on
    |
    v
    Long Push -> Manually Off
    |
    v
    <- ...

```

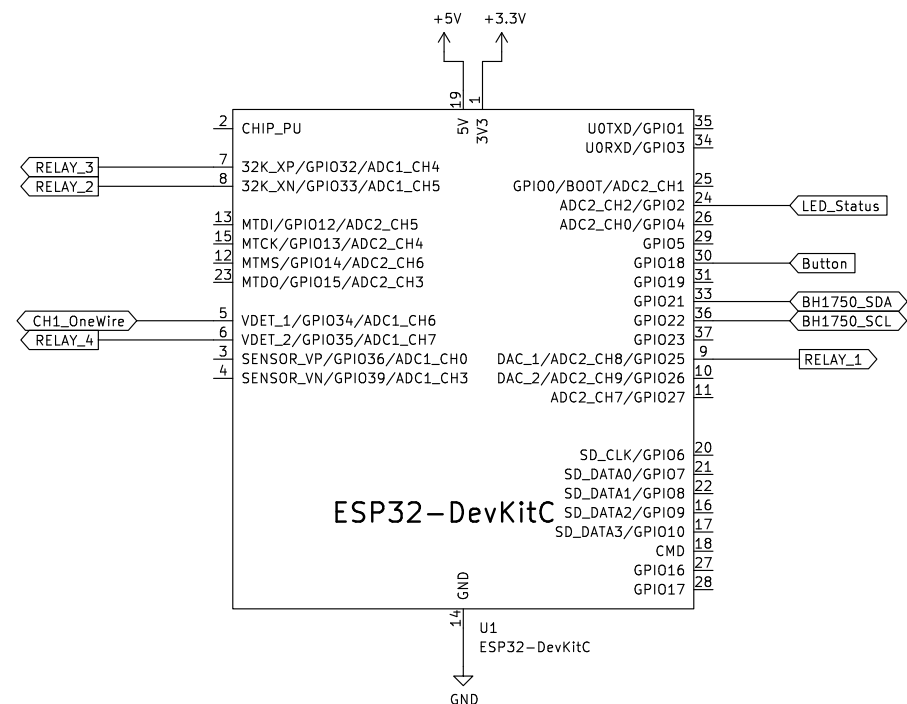

Sheet: /
File: RemotePlugSocket.kicad_sch

| |
|---------------------------------------------|
| Title: Remote Plug Socket Esp Devkit |
|---------------------------------------------|

| | |
|----------------------------------------|------------------|
| Size: A4 | Date: 2024-11-09 |
| KiCad E.D.A. kicad 7.0.11+dfsg-1build4 | |

| |
|------------|
| Rev: 0.1.0 |
| Id: 1/1 |