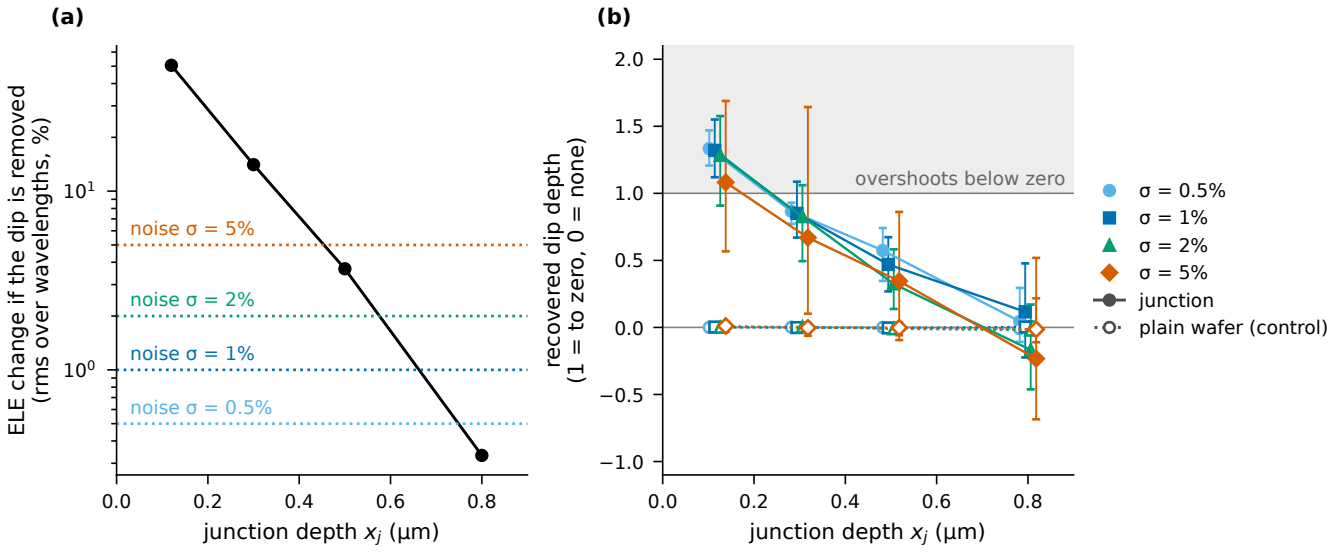
(a)
ELE change if the dip is removed
(rms over wavelengths, %)
10^1
10^0
noise σ = 5%
noise σ = 2%
noise σ = 1%
noise σ = 0.5%
0.0
0.2
0.4
0.6
0.8
junction depth x_j (μm)
(b)
recovered dip depth
(1 = to zero, 0 = none)
2.0
1.5
1.0
0.5
0.0
−0.5
−1.0
overshoots below zero
0.0
0.2
0.4
0.6
0.8
junction depth x_j (μm)
σ = 0.5%
σ = 1%
σ = 2%
σ = 5%
junction
plain wafer (control)