Open Access

Earth System
Science
Data

Soil water retention and hydraulic conductivity measured in a wide saturation range

Tobias L. Hohenbrink[1,2], **Conrad Jackisch**[3,4], **Wolfgang Durner**[1], **Kai Germer**[1,5], **Sascha C. Iden**[1], **Janis Kreiselmeier**[6,7], **Frederic Leuther**[8,9], **Johanna C. Metzger**[10,11], **Mahyar Naseri**[1,5], and **Andre Peters**[1]

[1]Institute of Geoecology, Soil Science & Soil Physics, TU Braunschweig, 38106 Braunschweig, Germany
[2]Deutscher Wetterdienst (DWD), Agrometeorological Research Centre, 38116 Braunschweig, Germany
[3]Interdisciplinary Environmental Research Centre, TU Bergakademie Freiberg, 09599 Freiberg, Germany
[4]Institute for Water and River Basin Management, Chair of Hydrology,
Karlsruhe Institute of Technology (KIT), 76131 Karlsruhe, Germany
[5]Thünen Institute of Agricultural Technology, 38116 Braunschweig, Germany
[6]Thünen Institute of Forest Ecosystems, 16225 Eberswalde, Germany
[7]Institute of Soil Science and Site Ecology, TU Dresden, 01737 Tharandt, Germany
[8]Helmholtz Centre for Environmental Research – UFZ, Department of Soil System Sciences,
06120 Halle (Saale), Germany
[9]Chair of Soil Physics, University of Bayreuth, 95447 Bayreuth, Germany
[10]Institute of Soil Science, Center for Earth System Research and Sustainability (CEN),
Universität Hamburg, 20146 Hamburg, Germany
[11]Institute of Geoscience, Group of Ecohydrology, Friedrich Schiller University Jena, 07749 Jena, Germany

Correspondence: Tobias L. Hohenbrink (t.hohenbrink@tu-braunschweig.de)

Abstract. Soil hydraulic properties (SHPs), particularly soil water retention capacity and hydraulic conductivity of unsaturated soils, are among the key properties that determine the hydrological functioning of terrestrial systems. Some large collections of SHPs, such as the UNSODA and HYPRES databases, have already existed for more than 2 decades. They have provided an essential basis for many studies related to the critical zone. Today, sample-based SHPs can be determined in a wider saturation range and with higher resolution by combining some recently developed laboratory methods. We provide 572 high-quality SHP data sets from undisturbed, mostly central European samples covering a wide range of soil texture, bulk density and organic carbon content. A consistent and rigorous quality filtering ensures that only trustworthy data sets are included. The data collection contains (i) SHP data, which consist of soil water retention and hydraulic conductivity data, determined by the evaporation method and supplemented by retention data obtained by the dewpoint method and saturated conductivity measurements; (ii) basic soil data, which consist of particle size distribution determined by sedimentation analysis and wet sieving, bulk density and organic carbon content; and (iii) metadata, which include the coordinates of the sampling locations. In addition, for each data set, we provide soil hydraulic parameters for the widely used van Genuchten–Mualem model and for the more advanced Peters–Durner–Iden model. The data were originally collected to develop and test SHP models and associated pedotransfer functions. However, we expect that they will be very valuable for various other purposes such as simulation studies or correlation analyses of different soil properties to study their causal relationships. The data are available at https://doi.org/10.5880/fidgeo.2023.012 (Hohenbrink et al., 2023).

1 Introduction

A sound understanding of the hydrological functioning of variably saturated soils in the environmental cycles is important for numerous applications in agronomy, forestry, water management and other disciplines. The hydrological functioning of soils is controlled by the soil hydraulic properties (SHPs), specifically the water retention and hydraulic conductivity characteristics. SHP models are essential to simulate water dynamics, solute transport and energy transfers in the vadose zone using water flow and transport equations. Such SHP models are empirical mathematical representations of the highly non-linear soil hydraulic curves, which are parameterised based on measured SHP data. In order to estimate SHPs from more accessible information, pedotransfer functions relate SHP parameters to basic soil properties like soil texture, bulk density and organic carbon content (C_{org}) (Vereecken et al., 2010; Van Looy et al., 2017).

Since the early applications of SHP models in hydrological simulations in the 1980s, there is a demand for such parameters (Carsel and Parrish, 1988). Commonly, they are derived for specific SHP models (Vereecken et al., 2010), which is most often the van Genuchten–Mualem model (Van Genuchten, 1980; Mualem, 1976). Fitting non-linear SHP models to observed data and developing pedotransfer functions both require large data collections containing information about SHPs measured over a large range of saturation in samples with various combinations of basic soil properties. Such data collections are commonly based on individual soil samples from various profiles.

Due to methodological restrictions, data for such applications were first limited to few points on the soil water retention curve using ceramic pressure plate extractors and pressure-controlled hydraulic conductivity (Brooks and Corey, 1964). Since the late 1990s, different data collections of SHPs and associated basic soil properties have been compiled. They formed the basis to develop various pedotransfer functions. The freely available Unsaturated Soil Hydraulic Database (UNSODA) provided by the U.S. Department of Agriculture comprises nearly 800 SHP data sets from disturbed and undistarbed samples (Nemes et al., 2001). It includes measurements of retention and hydraulic conductivity with different coverage of the saturation range as well as basic soil properties, for example, information on soil texture or bulk density. UNSODA was an important basis to develop ROSETTA (Schaap et al., 2001; Zhang and Schaap, 2017), which is the most established pedotransfer function to predict the parameters of the van Genuchten–Mualem SHP model.

Another prominent large collection of retention and hydraulic conductivity data is the database of the Hydraulic Properties of European Soils (HYPRES) (Wösten et al., 1999) and its further development as the European Hydropedological Data Inventory (EU- HYDI) (Weynants et

al., 2013), which is unfortunately not freely available. There are a few more specific SHP data collections, for example, the HYBRAS data, describing Brazilian soils (Ottoni et al., 2018), and the collection by Schindler and Müller (2017), which only contains data measured with the evaporation method (Peters and Durner, 2008; Schindler, 1980). Recently, Gupta et al. (2022) gathered published soil water retention data from 2702 sites, prepared them for use in land surface modelling and made them openly accessible.

The existing databases have undoubtedly supported a large number of hydrological studies leading to important conclusions, but they still have some limitations and shortcomings. Often, SHP data only cover a small part of the naturally occurring range of soil saturation. Gupta et al. (2022) emphasised that in many cases the retention data series contain only a few pairs of data and lack information in the wet region close to full saturation. Measured saturated hydraulic conductivity (K_{sat}) is included in several data collections, but detailed information about the unsaturated hydraulic conductivity is still rare.

It is technically possible to create pedotransfer functions using only retention and K_{sat} data (Assouline and Or, 2013), as has often been done in the past. However, in such cases the shape of the hydraulic conductivity curves is only predicted from the water retention curve and scaled to match K_{sat}. Hence, the absolute position of the conductivity curve is solely determined by a single K_{sat} value, which is strongly influenced by soil structure and macropore connectivity, which are often not recorded nor assessed at the time of sampling.

Serious development and rigorous testing of full-range SHP models always require measured unsaturated hydraulic conductivity data. Zhang et al. (2022) showed impressively how fast a supposedly large number of available SHP data sets can collapse, when they are filtered by predefined data requirements. They initially gathered 19 510 data sets from established data collections and first narrowed them down to 14 997 data sets describing undisturbed samples. They then extracted 1801 lab-measured data sets with information about both soil water retention and hydraulic conductivity. Finally, they extracted data sets with at least six retention and seven conductivity data pairs, each of which contained at least three data pairs close to saturation at matric heads larger than −20 cm. They ended up with 194 data sets accounting for only 1 % of the initial number.

Given the wide variability of naturally occurring soils, many pedotransfer functions are based on data collections that contain rather limited soil information. Weihermüller et al. (2021) showed that the choice of the pedotransfer function used in a soil hydrological model can have considerable effects on simulated water fluxes. The artificial neural network behind ROSETTA has been trained with 2134 retention curves, 1306 K_{sat} values and 235 unsaturated conduc-

tivity curves (Schaap et al., 2001; Zhang and Schaap, 2017). Considering the wide use of ROSETTA with more than 1860 citations (retrieved from Scopus on 26 August 2023), it becomes apparent that the specific characteristics of only 235 unsaturated hydraulic conductivity data sets have been propagated into a large number of applications and conclusions. However, pedotransfer functions can only predict the SHPs within the range covered by the training data set. Furthermore, they tend to reflect the individual characteristics of the training data, which are most pronounced in the case of small databases. To prevent such bottleneck effects, the basis for pedotransfer applications needs to be further diversified. This requires new and independent, quality-assured SHP data collections. With advanced measuring techniques becoming standard in many soil physical laboratories, it is now much easier to obtain experimental SHP data over a wider range of soil moisture and in the desired high quality.

In this paper, we present a collection of 572 new data sets of soil properties measured in soil samples (Hohenbrink et al., 2023) that are independent of existing databases. Each data set contains (i) SHPs and (ii) basic soil properties such as soil texture, bulk density and C_{org}. The SHP data meet high-quality requirements since they have been determined by combining state-of-the-art laboratory techniques, i.e. the evaporation method (Peters and Durner, 2008; Schindler, 1980), the dewpoint potentiometry (Campbell et al., 2007) and separate K_{sat} measurements. In addition, each data set has undergone thorough quality control. The data collection covers a wide range of soil textures. Soil texture information is provided according to both the German (Ad-hoc-Arbeitsgruppe Boden, 2005) and the USDA classification systems (USDA, 1999). Within the silt and sand classes, we also provide the sub-classes "coarse", "medium" and "fine" according to the German system.

In support of the FAIR (Findable, Accessible, Interoperable and Reusable) principles (Wilkinson et al., 2016), we provide free access to the data for the development of SHP models and pedotransfer functions. We expect them to be valuable for a variety of purposes such as simulation studies and statistical analyses of various soil properties.

2 Materials and methods

2.1 Data sources

A community initiative for collecting and sharing consistent SHP data was launched by researchers from the Division of Soil Science and Soil Physics at TU Braunschweig. Scientists from four other institutions participated by providing data measured in their laboratories. Most of the data had already been used to answer individual research questions at various research sites (Jackisch et al., 2017; Kreiselmeier et al., 2019, 2020; Leuther et al., 2019; Jackisch et al., 2020; Germer and Braun, 2019; Metzger et al., 2021). Some existing but yet unpublished data sets have been reviewed and

integrated into the data collection, too. In addition, we systematically added data from sites with soil characteristics that were missing from the data collection. Such data were explicitly measured for this data collection.

To be included in the data collection, the data sets had to contain soil water retention and hydraulic conductivity data, measured in the laboratory by the evaporation method, preferably supplemented by dewpoint method data and also measurements of saturated hydraulic conductivity. The data sets also had to include information about soil texture and bulk density and preferably C_{org}. We have aimed to cover the data space of these basic soil properties as completely as possible. Therefore, we also included data sets that lacked some of the preferred information if they added new combinations of basic soil properties to the data collection.

2.2 Soil samples

Each data set is based on one undisturbed soil sample taken in situ with a metal cylinder. In 542 cases the sample volume was $250 \, cm^3$, while 30 samples had a volume of $692 \, cm^3$ as indicated in the metadata table of Hohenbrink et al. (2023). For the measurement of C_{org}, soil texture and retention data in the dry range (dewpoint method), disturbed soil (sub)samples were taken. In 363 cases, exactly one disturbed sample was assigned to each undisturbed sample, either by taking both samples in close proximity to each other or by taking the disturbed sample directly from the undisturbed sample material after measuring the SHPs. In the other 209 cases, the disturbed sample was taken as mixed material, representative of an entire site with several undisturbed sampling points. Consequently, in the latter cases the soil variables derived from the aggregated disturbed samples have been assigned to more than one data set (indicated in the metadata table). Information about the positions of the sampling sites is available for 555 data sets. It has either been measured by GPS or was taken from aerial images after sampling. The geo-positions are reported with a lateral accuracy of 100 m, which represents the best accuracy class in Gupta et al. (2022). The sampling depth is reported for 474 samples in the metadata table.

2.3 Laboratory measurements

Soil water retention in the wet (defined here as pF < 1.8; $pF = \log_{10}(-h \, [cm])$) and medium (defined here as 1.8 < pF < 4.2) moisture range and hydraulic conductivity in the medium moisture range were simultaneously determined with the simplified evaporation method (Peters and Durner, 2008; Schindler, 1980) using the HYPROP device (METER Group, AG, Germany). The evaporation method provides information related to the drying branches of the SHP curves. The air entry points of the tensiometer cups were used as an additional measuring point (Schindler et al., 2010) in cases where the duration of the evaporation experiments was long

enough. Soil water retention information was supplemented mainly in the dry moisture range (defined here as pF > 4.2) by measurements with the dewpoint method (Campbell et al., 2007; Kirste et al., 2019) using the WP4C device (METER Group, Inc., USA). Hydraulic conductivity of the saturated soil was measured in the undisturbed samples either with the falling head or the constant head method using the KSAT device (METER Group, AG, Germany).

Particle size distributions of the disturbed soil samples were determined by wet sieving for the sand fractions and sedimentation methods for the silt fractions and clay content (DIN ISO 11277, 2002). The sedimentation analyses were carried out with slightly different approaches in each lab as specified for each data set in the metadata table. The respective particle size classes were defined by the German soil classification system (Ad-hoc-Arbeitsgruppe Boden, 2005). Because the German system differs from international standards in the boundary between silt and sand (German: 63 μm, USDA: 50 μm) we additionally converted the texture data by interpolation with monotone cubic splines fitted to the cumulative particle size distributions as recommended by Nemes et al. (1999). Illustrations showing data in the texture triangle were created using the "soiltexture" R package (Moeys, 2018). The bulk density of each sample was determined by oven-drying for at least 24 h after the evaporation experiments. C_{org} was determined with high-temperature combustion using different elemental analysers, which are listed in the metadata table.

2.4 Data preparation and quality check

The results of all SHP measurements have been compiled with the HYPROP-FIT software (Pertassek et al., 2015). It was developed to organise and evaluate raw data from the simplified evaporation method, the dewpoint potentiometry and individual K_{sat} measurements.

Despite a high level of automation and standardisation, manual adjustments to selecting the raw data for evaluation are required. To avoid misalignment due to differences in the manual treatment, all resulting retention and hydraulic conductivity points have been re-checked for plausibility by the same expert based on the following procedure:

1. *Tensiometer check and offset correction.* HYPROP uses two tensiometers at different levels. If in the first hours of the experiments (close to saturation) the measured difference between the upper and lower tensiometers deviates from the actual difference of 2.5 cm by more than 1 cm, an offset correction was performed to prevent unrealistic hydraulic gradients during data evaluation.

2. *Consistency check if the initial water content was smaller than the porosity.* If not, a slightly larger column height (1–4 mm) has been assumed to account for surplus water in the data evaluation.

3. *Setting the evaluation limits of the evaporation method.* Because not all measurements follow idealistic conditions, the data for evaluation have been limited to plausible records (capillary connection of the tensiometers, plausible upward gradient, omission of scattered values for unsaturated conductivity near saturation).

4. *Omitting retention data of the dewpoint potentiometry outside its validity limits.* Dewpoint potentiometry measurements tend to be less precise for lower tensions. To avoid unnecessary variance between the different methods (dewpoint and evaporation), values below pF 4 were omitted.

5. *Plausibility of hydraulic conductivity values.* In cases of values for unsaturated conductivity exceeding the separately measured saturated conductivity, such values were omitted.

6. *Visual alignment.* Check for data from the three methods (K_{sat}, evaporation, dewpoint) and omission of obviously misaligned data sets from the collection.

The original binary HYPROP-FIT files are provided by Hohenbrink et al. (2023) to ensure transparency on all manual adjustments. The final series of measured retention and hydraulic conductivity data were exported from HYPROP-FIT to csv files for further data processing, which was mainly performed in R (R Core Team, 2020).

2.5 Fitting models to measured SHP data

For direct access to resulting SHP model parameters, we fitted two models to the measured soil water retention and hydraulic conductivity data using a shuffled complex evolution (Duan et al., 1992) in SHYPFIT 2.0 (Peters and Durner, 2015). The first model is the well-established van Genuchten–Mualem (VGM) model (Van Genuchten, 1980; Mualem, 1976). The second model is the recent version of the Peters–Durner–Iden (PDI) model with the VGM model as the basic function (Peters et al., 2021, 2023).

The PDI model specifically considers (i) capillary water in completely filled pores and (ii) non-capillary water in thin films on particle surfaces and in corners and ducts of the pore system. The explicit consideration of non-capillary water yields more realistic retention and hydraulic conductivity curves in the medium and dry moisture range. Furthermore, the description of hydraulic conductivity in the dry range includes an effective component that reflects isothermal vapour flux (Peters, 2013).

Retention and conductivity parameters were estimated simultaneously. During model fitting the few retention points measured with the dewpoint method were weighted 10 times higher than those obtained with the evaporation method because the latter have a much higher abundance. Weights of hydraulic conductivity data were defined in a way that their

Table 1. Upper and lower parameter boundaries for fitting the van Genuchten–Mualem model (VGM) and the Peters–Durner–Iden model (PDI). α and n – shape parameters, θ_r and θ_s – residual and saturation water content, K_s – saturated hydraulic conductivity parameter, and λ – tortuosity parameter. Note that the parameter boundaries for θ_r and θ_s are defined individually as a fraction of the porosity Φ. The boundaries for θ_r and λ differ between both models to ensure physical consistency. The lower λ constraint for VGM is set to guarantee physical consistency while allowing for maximum flexibility.

	VGM		PDI	
	lower	upper	lower	upper
α (cm^{-1})	10^{-5}	0.5	10^{-5}	0.5
n (–)	1.01	8.00	1.01	8.00
θ_r (–)	0.0	$0.25 \cdot \Phi$	0.0	$0.75 \cdot \Phi$
θ_s (–)	0.2	Φ	0.2	Φ
K_s (cm d^{-1})	10^{-2}	10^5	–	–
λ (–)	$1 - \frac{2}{1-\frac{1}{n}}$	10	-1	10

ratio to the mean retention data weights was 16 to 10 000 following Peters (2013). We neglected measured K_{sat} values in the parameter optimisation process, since they mainly reflect effects of soil structure (Weynants et al., 2009), which is not considered in the unimodal SHP models. The saturated hydraulic conductivity model parameter K_s equals the hydraulic conductivity of the saturated bulk soil excluding the soil macropore network.

For the VGM model six parameters were estimated (residual and saturation water content θ_r (–) and θ_s (–), the shape parameters α (cm^{-1}) and n (–), the tortuosity parameter λ (–), and the saturated hydraulic conductivity parameter K_s (cm d^{-1})). The predefined parameter limits are listed in Table 1. The upper limits for θ_r and θ_s were defined as a fraction of porosity Φ to ensure physical consistency. For the PDI model, five parameters (θ_r, θ_s, α, n and λ) were estimated with the same settings and fitting algorithms as in Peters et al. (2023).

Unlike VGM and common models of SHPs, where the relative hydraulic conductivity curve is scaled by the saturated conductivity K_s, the new PDI model structure allows conductivity data close to saturation to be realistically predicted, which are usually not available (Peters et al., 2023). To avoid an unrealistically sharp drop of the conductivity curve close to saturation for soils with wide pore size distribution, we constrained the conductivity model by a maximum pore radius (maximum tension) close to saturation with the "h-clip approach" (Iden et al., 2015). According to Jarvis (2007), the maximum tension was set to -6 cm (5 mm equivalent pore diameter). The saturated conductivity is defined as the predicted absolute conductivity at this tension. We refer to Peters et al. (2021, 2023) for a more detailed description of the applied version of the PDI model.

3 Data description

The data collection is structured in the following sections: (i) metadata (file: MetaData.csv); (ii) basic soil properties (BasicProp.csv); and (iii) SHPs, including measured points of the retention curve and hydraulic conductivity curve (RetMeas.csv, CondMeas.csv), optimised parameter sets for two SHP models (Param.csv), and data series resulting from both SHP models (HydCurves.csv). Each data set is labelled by a unique sample ID for easy joining of the different tables.

3.1 Metadata

The metadata table summarises relevant information about the availability of the single variables in each data set. All 572 data sets contain SHP measurements by the evaporation method, 499 contain at least one dewpoint measurement and 409 data sets include K_{sat} measurements (Table 2). In 370 data sets all three kinds of SHP information are available. In the case of the basic soil properties, soil texture and bulk density are available for all data sets, and C_{org} is available in 488 cases. Complete information about all variables (SHPs and basic soil properties) is contained in 315 data sets (57 %).

The data collection contains location information for 555 data sets (see Appendix Fig. A1). The sampling sites are not arranged systematically, as the region of sampling has not been a criterion for data collection. They are rather clustered in the regions where the contributing groups have performed field work. Most of the samples were taken in central Europe ($n = 508$). A few data sets came from Canada ($n = 29$), Japan ($n = 5$) and Israel ($n = 30$).

3.2 Basic soil properties

The data collection covers a wide range of soil textures, including soils with up to 65 % clay and 93 % silt and 100 % sand (positions of symbols in the soil texture triangle; Fig. 1). It covers the textures most frequently found in temperate climates. The main textural classes according to the German classification (Ad-hoc-Arbeitsgruppe Boden, 2005) account for 217 (sand), 146 (silt), 121 (loam) and 88 (clay) data sets (Fig. 1a). The sandy soils are further subdivided into 39 samples for pure sand and 178 samples for loamy sand, as the SHPs usually have the highest variation within the sand texture class. The two areas in the soil texture triangle with the lowest data coverage are sandy clay and sandy silt. Figure 1d shows the colour-coded samples in the USDA texture triangle to provide orientation for international readers.

The bulk density of the samples varies between 0.37 and 1.89 g cm^{-3} with a median of 1.40 g cm^{-3}. High bulk density mainly occurs in sandy soils, while silty clay soils are less dense (Fig. 1b and 1e). In general, soil bulk density scatters across the texture triangle, which is reflected by rather weak but significant Pearson correlations (p value < 0.05) between

Table 2. Key variables contained in the data collection, laboratory method used for analyses and number of available samples.

Measured variable	Laboratory method	Number of available samples
Hydraulic properties of unsaturated soil	Evaporation method (Peters and Durner, 2008; Schindler, 1980) using the HYPROP device (Pertassek et al., 2015)	572
	Added measurements by air entry point of tensiometer (Schindler et al., 2010)	286
	Added retention measurements by dewpoint method (Campbell et al., 2007)	499
Hydraulic conductivity of saturated soil	Falling head or constant head method using the KSAT device (METER Group AG, 2023)	409
Bulk density	Weight of oven-dried (105 °C) undisturbed samples (Dane and Topp, 2002)	572
Soil texture (63–2000 µm)	Wet sieving with 2000, 630, 200, 63 µm sieves (DIN ISO 11277, 2002)	572
Soil texture (≤ 63 µm)	Pipette method (Köhn, 1931)	300
	Pipette method (Moshrefi, 1993)	78
	Hydrometer method (Dane and Topp, 2002)	52
	Integral suspension pressure method (Durner et al., 2017; Durner and Iden, 2021)	94
	Method unknown	48
Soil organic carbon content	High-temperature combustion using different elemental analysers as listed in the metadata table	488

bulk density and the sand ($r = 0.41$), silt ($r = -0.24$) and clay ($r = -0.50$) contents, respectively.

C_{org} in the samples ranges from 0.04 % to 19.26 % with a median of 1.44 %. The maximum values occur mainly in silty clay, loam and silty sand soils. Smaller C_{org} values are associated with sand and silt soils (Fig. 1c and f).

In addition to the standard soil texture classification by sand, silt and clay fractions, the subgroups for silt and sand (i.e. coarse sand, medium sand, fine sand, coarse silt, medium silt and fine silt) are provided for the German classification system (Fig. 2a). Most silt soils contain a maximum fraction of coarse silt (20–63 µm), while the loamy sands are mainly dominated by the fine sand fraction (63–200 µm). In contrast to the weak correlation between soil texture with C_{org} and bulk density, the latter are negatively correlated to each other ($r = -0.76$; Fig. 2b).

3.3 Measured soil hydraulic data

The measured SHPs are shown in Fig. 3. The retention data cover almost the entire range between full water saturation and oven dryness. The highest data coverage is available in the wet and medium saturation range with pF < 3.2, where the data stem from the simplified evaporation method. Half of the data sets contain one additional data point between pF 3.0 and pF 4.0, which originates from the air entry pressure of the porous tensiometers cup. In 499 data sets at least one data

pair between pF 4.0 and pF 6.3 determined by the dewpoint method exists. To cover the drying branch towards pF 6.8, the number of measurements for single samples ranges between 1 and 8 (with a median of 3) because this method can only assess the matric head values after each reading of the respective sample states.

Hydraulic conductivity data obtained by the evaporation method range mostly from pF 1.0 to pF 3.2. Again, one single conductivity data point originates from the air entry of the porous cup for about half of the data sets. A separately measured K_{sat} is available for 409 data sets. The data collection contains conductivity data neither in the range close to saturation (pF < 1), nor in the dry range. Currently, there is no standard laboratory method to determine hydraulic conductivity in this range. In the online version in Fig. 3, the different methods contributing to the retention and conductivity data are plotted as circles (evaporation), triangles (air entry point), squares (dewpoint) and diamonds (K_{sat}). Figure 4 presents the same data colour coded by bulk density.

3.4 Fitted SHP models

The distributions of the fitted model parameters for both VGM and PDI (data provided in table "Param.csv" in Hohenbrink et al., 2023, but not shown here) mostly cover the predefined range of plausible parameters (Table 1). The constraining boundaries were only hit in five cases except for
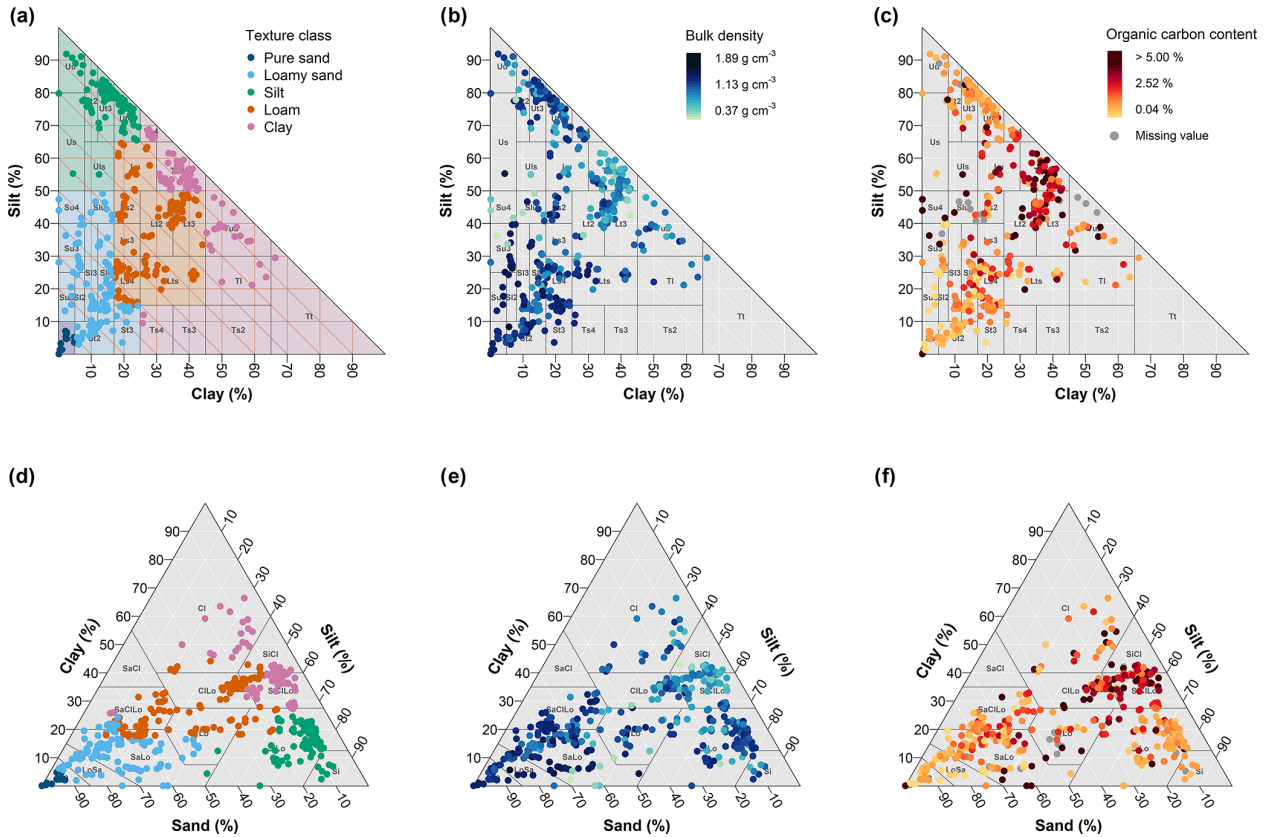
Figure 1. Distributions of texture classes (**a, d**), bulk density (**b, e**) and organic carbon content (**c, f**) in the texture triangle of the German (**a–c**) and USDA (**d–f**) system.

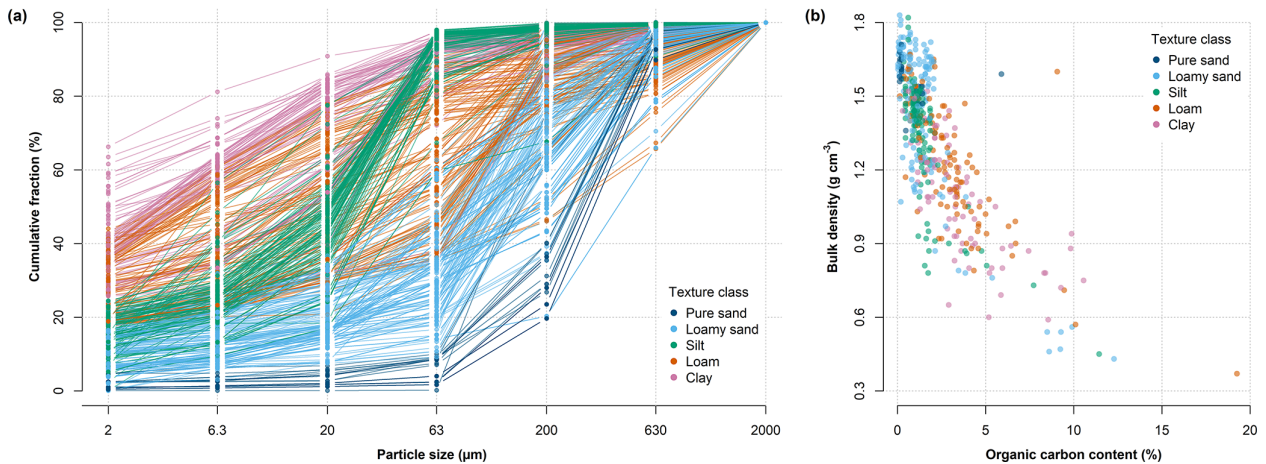**Figure 2.** (**a**) Cumulative particle size distributions of the 572 samples (German classification system). (**b**) Scatter plot of C_{org} and bulk density ($r = -0.76$). The reference texture classes are colour coded.

parameter λ of the PDI model (154 cases in which bounds were hit).

The fitted water retention curves (Fig. 5a and c) reflect the main characteristics of the measured SHPs described above. Retention curves from both models are similar in the wet

to medium range. However, in the medium to dry moisture range they systematically differ. The retention curves described by VGM approach a water content between 0 % and 28 %, while those from the PDI model consistently reach zero saturation at pF = 6.8, which reflects the matric poten-

Figure 3. Soil water retention **(a)** and hydraulic conductivity **(b)** grouped and colour coded by texture class. Grey background symbols show all measured values. Please note the different pF ranges for the retention and conductivity curves. In the online version the different laboratory methods contributing to the retention and conductivity data are plotted as circles (evaporation), triangles (air entry point), squares (dewpoint) and diamonds (K_{sat}), visible after zooming in.
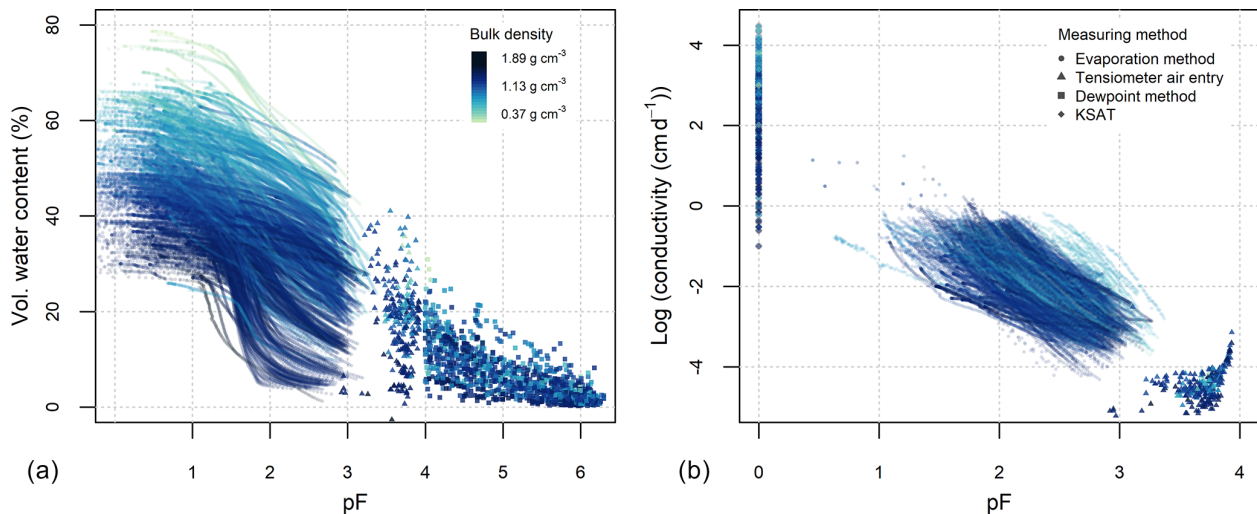
Figure 4. Soil water retention **(a)** and hydraulic conductivity **(b)** colour coded by bulk density. Please note the different pF ranges for the retention and conductivity curves. A more detailed version with the used texture classes is in the Appendix Fig. A2. In the online version the different laboratory methods contributing to the retention and conductivity data are plotted as circles (evaporation), triangles (air entry point), squares (dewpoint) and diamonds (K_{sat}), visible after zooming in.

tial at oven dryness (Schneider and Goss, 2012). The hydraulic conductivity curves described by VGM (Fig. 5b) vary over a wide range. It proves difficult to visually relate the curves to respective texture classes because the wet range part scales strongly with the existence of larger pores, and the shape of the curve is strongly limited by the underlying linear fit in log–log space. The PDI model curves (Fig. 5d) are more closely related to texture and span a much narrower range for each texture class. The variation among the curves decreases towards the dry end of the saturation range. Especially in the dry range, the hydraulic conductivity increases along the texture gradient from pure sand via loamy sand, silt and loam to clay. This phenomenon results from the PDI model structure, where hydraulic conductivity in the dry range is directly derived from the water content at pF = 5.0 (Peters et al., 2021). At pF > 5.5 the hydraulic conductivity of the PDI model is dominated by the isothermal vapour conductivity for all texture classes.

As an estimate for soil water characteristics, we derived soil water content at field capacity (θ at pF = 1.8), soil water content at the permanent wilting point (θ at pF = 4.2), and the resulting plant-available water content (θ (pF 1.8) − θ(pF 4.2)). Figure 6 shows these values in the texture triangle calculated based on the PDI retention curves. The water content at both field capacity (Fig. 6a) and wilting point (Fig. 6b) roughly increases from sandy soils towards soils with finer textures. However, apart from this very general distinction, the values of both variables vary widely over the texture triangle, which directly results from the variation of the retention curves within a single texture class (Fig. 5c). Plant-available water content (Fig. 6c) depicts the same high variability within the texture triangle. It varies between the

extremes of 3.8 vol % in pure sand up to 49.2 vol % in fine-textured soil but does not align to any clear, texture-related pattern.

4 Discussion

4.1 New applications arising from the data collection

The combination of different state-of-the-art methods to measure soil water retention and hydraulic conductivity based on undisturbed samples yields a unique SHP data collection. In particular, the denser coverage of a wider range of saturation levels compared to existing data collections makes it valuable for new applications. For example, the retention data in the dry range measured with the dewpoint method represent essential information to develop retention models that overcome the concept of a residual water content, which has been shown to be not physically consistent (e.g. Schneider and Goss, 2012; Tuller and Or, 2005; Nimmo, 1991). Furthermore, this data collection provides measurements of both saturated and unsaturated hydraulic conductivity in high resolution and over a wide range of saturation levels. This supports the development and improvement of hydraulic conductivity models.

The high level of standardisation using the described methods enables us to link data from various labs without methodological offsets commonly found due to slightly deviating soil sample processing. Although the data set does not reach any global coverage, the data set exceeds existing SHP data collections by data density, extent of the values and variables, and consistency. We envision the proposed data struc-
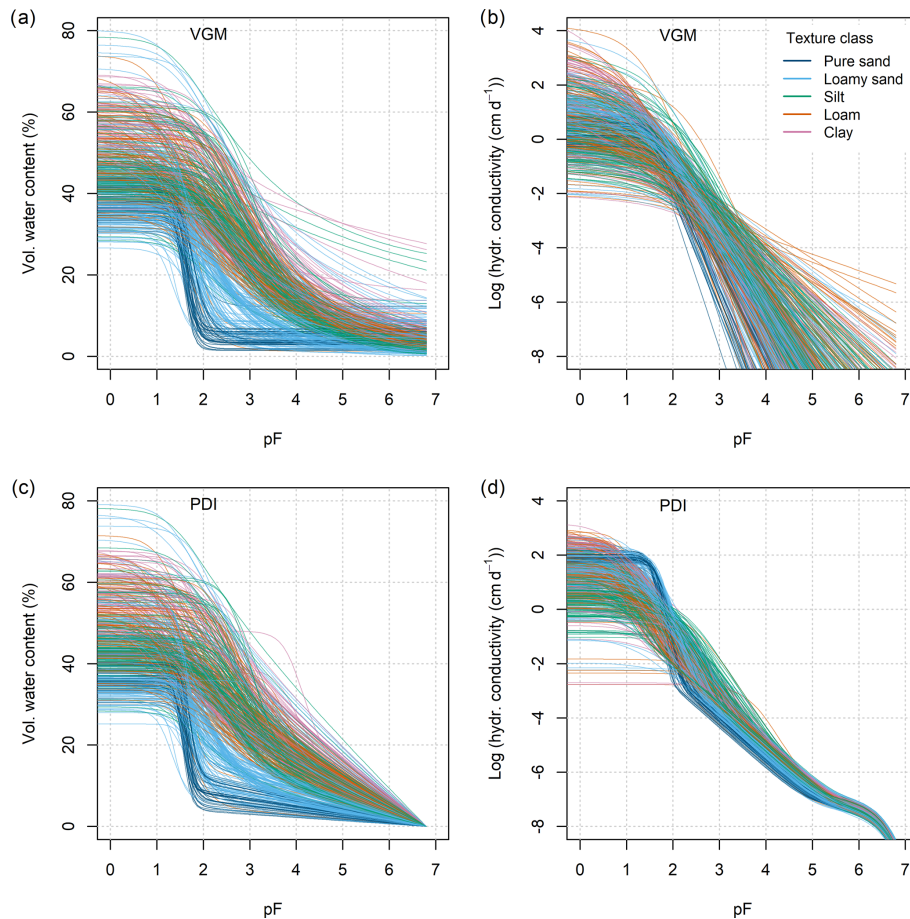
Figure 5. Retention curves (left, **a** and **c**) and hydraulic conductivity curves (right, **b** and **d**) for the van Genuchten–Mualem model **(a, b)** and the PDI model with VGM basic function **(c, d)**. Soil texture classes are colour coded.
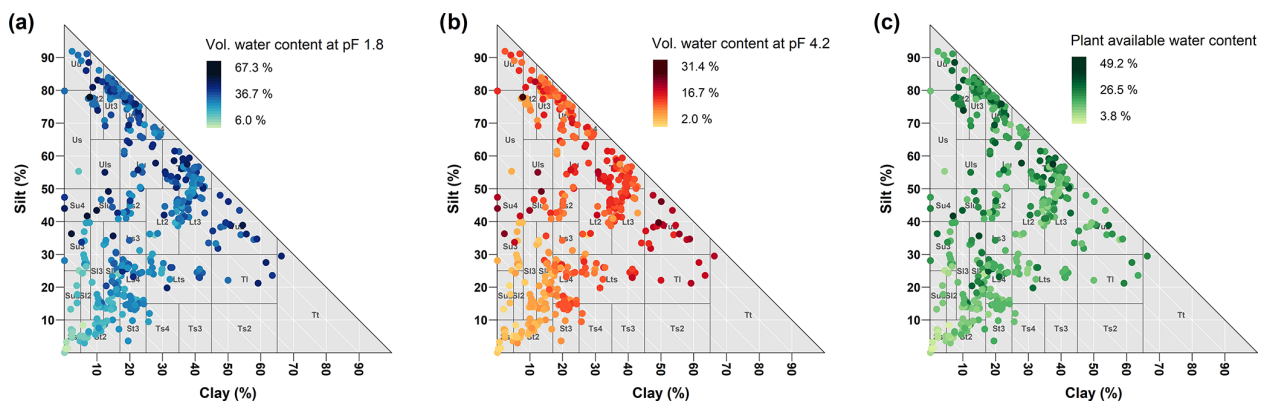

Figure 6. Volumetric water contents at **(a)** field capacity, **(b)** the plant wilting point, and **(c)** the resulting plant available water scattered on the soil texture triangle. The values provided in the data collection are calculated from retention curves described by the PDI model.

ture as a foundation for upcoming additions with the methods becoming more and more accessible.

　　The VGM and PDI parameters provided in the data collection have been estimated with state-of-the-art techniques. Both parameter sets can be valuable to develop and test sim-

ulation models and to perform simulation studies. They can also serve as a benchmark for further developments of non-linear parameter estimation algorithms. We have intentionally omitted the measured K_{sat} values during parameter estimation. Considering K_{sat} in combination with unimodal

SHP models usually causes an overestimation of hydraulic conductivity close to saturation since the K_{sat} information mainly reflects the impact of soil structure (Durner, 1994; Peters et al., 2023). The K_s parameter derived for the PDI can thus be interpreted as the conductivity of the soil matrix only, excluding the effects of soil structure, similarly to Weynants et al. (2009) and as further discussed in Fatichi et al. (2020). It is now possible to further investigate the relation between K_s of the soil matrix and K_{sat} of the entire soil including structure effects based on the parameters provided.

In addition to the commonly used three fractions sand, silt and clay to classify soil texture, we provide subgroups for sand and silt. Most pedotransfer functions only consider the three main texture groups as predictor variables. Our data suggest that the main texture classes alone contain limited information about soil hydraulic properties (large spread of hydraulic curves within texture classes in Fig. 3, scattered texture distribution for plant available water in Fig. 6c). Only in combination with bulk density and C_{org} do the data become more informative (Figs. 4 and A2). For advancing pedotransfer functions, the presented data collection is a promising basis for analyses of (i) the resolution of texture data and texture class delineation (see Twarakavi et al., 2010), (ii) the resolution of the SHP data series and (iii) suitable indicators for hydrologic functioning (field capacity, wilting point, etc.; see Assouline and Or, 2014).

4.2 Limitations of the data collection and further research needs

Although the data collection enables many different applications, it has some limitations that must be considered when analysing the data and interpreting the results. The single data sets are not completely statistically independent from each other for the following main reasons: (i) many samples stem from identical sites, (ii) some data sets exhibit identical texture and C_{org} values because in these cases only few aggregated disturbed samples representative of a whole site have been taken, and (iii) the analyses have been performed in five different laboratories. However, by closely following the guidelines of the experiments, a high degree of standardisation in the laboratory protocols could be achieved.

In some situations, it might be reasonable to thin out the data by keeping only data sets assumed to be statistically independent. However, whether this is necessary depends on the particular research question and the applied data analysing technique. We have decided to include all available data sets and to provide enough meta information to evaluate the statistical dependencies and leave it up to the user to decide how to handle such dependencies.

Another limitation of the data that users must cope with is the unbalanced distribution of the data sets in terms of basic soil properties. For example, Luvisols with silt contents between 70 % and 85 % are overrepresented in the data collection due to their agricultural importance, which led to more frequent soil analyses. In contrast, there are data gaps for the sandy clay and sandy silt texture classes because they do occur more sparsely in the regions under study and are generally less intensively investigated. The unbalanced distribution of the data can be especially challenging for the development of pedotransfer functions. This problem can be best solved by supplementing the data collection by additional measurements, but this is a major task at the level of the soil hydrological community and can hardly be achieved by individual researchers.

At the level of individual data sets, the gaps in the hydraulic conductivity series near saturation and under dry conditions are another important limitation. Such data are needed to parameterise existing models in a way that they become more reliable in the respective saturation ranges. More comprehensive hydraulic conductivity data are also required to develop new SHP models. Therefore, we identify a need for developing and establishing new standard methods to measure hydraulic conductivity close to saturation (Sarkar et al., 2019b, a) and in the dry range.

4.3 Implications for lab procedures and further extension of the data collection

The different texture class definitions required us to estimate the missing breakpoint between USDA sand and silt fractions based on monotone cubic splines fitted to the German cumulative particle size distributions as recommended by Nemes et al. (1999). While this technique appears perfectly feasible given the high level of detail in the texture data with seven classes, this would have been more uncertain if the data had been limited to the three main texture classes. The estimate can be eliminated altogether, when the 63 μm sieve and the 50 μm sieve are included as standard.

Despite the high level of standardisation using the described techniques to determine SHPs, the quality check based on the procedure presented in Sect. 2.4 proved to be important to avoid erroneous interpretations and to ensure data quality. When followed, data from different labs can be easily combined. It would be favourable if this could be extended to further relevant soil properties, for example, soil texture, C_{org} and mid-infrared reflection spectra. We encourage the community to use and extend this data collection.

5 Data availability

The data collection is hosted in the repository GFZ Data Services (Hohenbrink et al., 2023). It can be accessed via https://doi.org/10.5880/fidgeo.2023.012. The rights of use are defined by a creative common licence (CC BY 4.0). The data collection in the repository includes all data presented in this paper. Further information and materials such as small volumes of air-dried reserve soil samples can be provided by the corresponding author or the second author (conrad.jackisch@tbt.tu-freiberg.de) upon request.

6 Summary and conclusions

Motivated by a need for detailed soil water retention and hydraulic conductivity data, we collected data from 572 undisturbed ring samples in a community initiative. A high level of standardisation in new measurement techniques and rigorous quality filtering allowed for consistency, which is rarely achieved in soil hydraulic analyses from different labs.

Initial comparisons of hydraulic indicators (e.g. plant available water content) with classical texture data showed very weak predictive power by texture. The addition of more texture classes from the particle size distribution and the addition of supplementary data on bulk density and organic carbon content appear to be more informative predictors.

The data collection can be used in its current form or integrated into existing data collections. All data sets were acquired directly from the original sources, which makes the data collection completely independent of the existing pool of data on SHPs and thus contributes to their diversification. In particular, the hydraulic conductivity series will substantially expand the existing inventory of SHP data.

We expect that this data collection can serve as an independent, new and therefore unexplored benchmark reference to evaluate already existing SHP models and pedotransfer functions. Due to the high resolution of measured data compared to most data in existing databases and the extended range of saturation, it is also an ideal basis to develop and test new advanced SHP models and pedotransfer functions. It is well suited to verifying findings and conclusions that have so far emerged from the existing data collections.

Appendix A

Since global coverage and regional distribution of the sampling have not been criteria for data collection, the samples are basically linked to the research activities of the contributors. Most samples were taken in central Europe ($n = 508$). A few data sets come from Canada ($n = 29$), Japan ($n = 5$) and Israel ($n = 30$) (Fig. A1 for visual reference).

Because soil texture classes did not provide strong information about the soil water retention and hydraulic conductivity curves, we have added the same plots as in Fig. 3, colour coded by bulk density (Fig. A2).
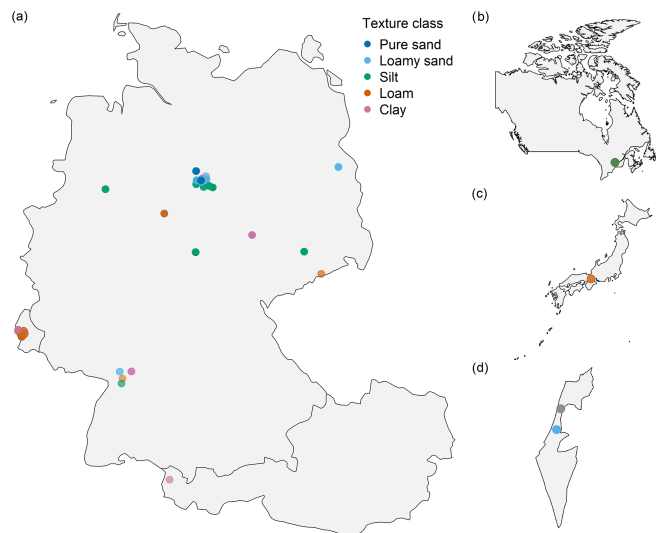

Figure A1. Locations of the sampling sites in **(a)** Luxembourg, Germany and Austria, **(b)** Canada, **(c)** Japan, and **(d)** Israel. Please note that the map scales differ, as the maps should only provide a broad overview.
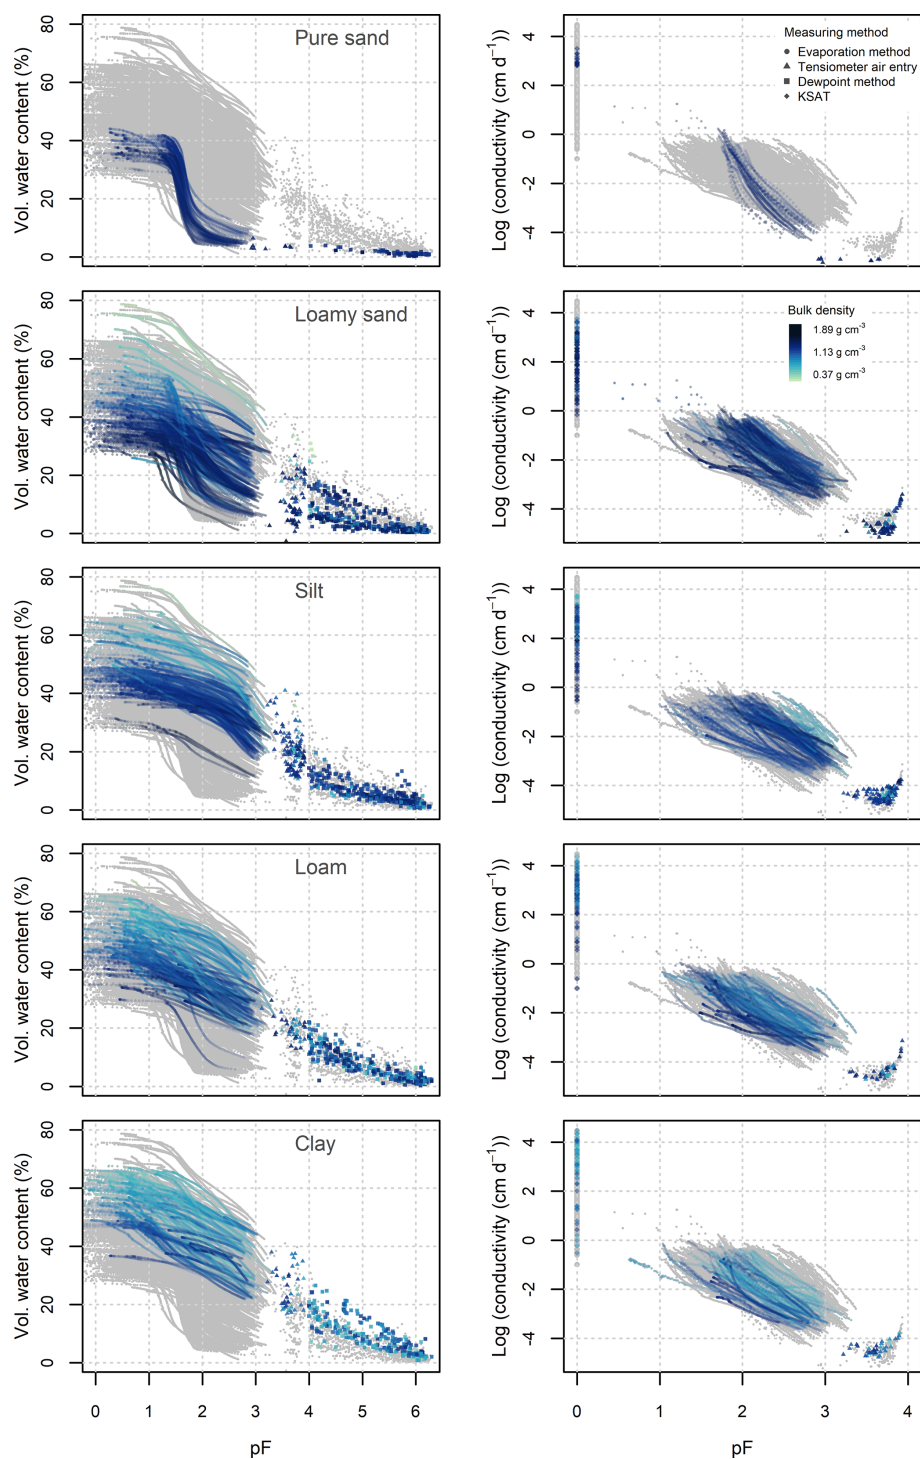
Figure A2. Soil water retention (left) and hydraulic conductivity (right) colour coded by bulk density. Please note the different pF ranges for the retention and conductivity curves. In the online version the different methods contributing to the retention and conductivity data are plotted as circles (evaporation), triangles (air entry point), squares (dewpoint) and diamonds (K_{sat}).

Competing interests. At least one of the (co-)authors is a member of the editorial board of *Earth System Science Data*. The peer-review process was guided by an independent editor, and the authors also have no other competing interests to declare.

Disclaimer. Publisher's note: Copernicus Publications remains neutral with regard to jurisdictional claims in published maps and institutional affiliations.

Review statement. This paper was edited by Hanqin Tian and reviewed by three anonymous referees.

References

Ad-hoc-Arbeitsgruppe Boden: Bodenkundliche Kartieranleitung: mit 41 Abbildungen, 103 Tabellen und 31 Listen, edited by: Eckelmann, W., E. Schweizerbart'sche Verlagsbuchhandlung (Nägele und Obermiller), Stuttgart, ISBN 978-3-510-95920-4, 2005.

Assouline, S. and Or, D.: Conceptual and Parametric Representation of Soil Hydraulic Properties: A Review, Vadose Zone J., 12, 1–20, https://doi.org/10.2136/vzj2013.07.0121, 2013.

Assouline, S. and Or, D.: The concept of field capacity revisited: Defining intrinsic static and dynamic criteria for soil internal drainage dynamics, Water Resour. Res., 50, 4787–4802, https://doi.org/10.1002/2014wr015475, 2014.

Brooks, R. H. and Corey, A. T.: Hydraulic properties of porous media, Hydrol. Paper 3, 1–27, Colorado State University, Fort Collins, Colorado, 1964.

Campbell, G. S., Smith, D. M., and Teare, B. L.: Application of a Dew Point Method to Obtain the Soil Water Characteristic, in: Experimental unsaturated soil mechanics, Springer, 71–77, https://doi.org/10.1007/3-540-69873-6_7, 2007.

Carsel, R. F. and Parrish, R. S.: Developing joint probability distributions of soil water retention characteristics, Water Resour. Res., 24, 755–769, https://doi.org/10.1029/WR024i005p00755, 1988.

Dane, J. H. and Topp G. C. (Eds.): Methods of Soil Analysis: Part 4 Physical Methods, John Wiley & Sons., https://doi.org/10.2136/sssabookser5.4, 2002.

DIN ISO 11277: Soil quality – Determination of particle size distribution in mineral soil material – Method by sieving and sedimentation (ISO 11277:1998 + ISO 11277:1998 Corrigendum 1:2002), DIN Deutsches Institut für Normung e.V., https://doi.org/10.31030/9283499, 2002.

Duan, Q., Sorooshian, S., and Gupta, V.: Effective and efficient global optimization for conceptual rainfall-runoff models, Water Resour. Res., 28, 1015–1031, https://doi.org/10.1029/91WR02985, 1992.

Durner, W.: Hydraulic conductivity estimation for soils with heterogeneous pore structure, Water Resour. Res., 30, 211–223, https://doi.org/10.1029/93WR02676, 1994.

Durner, W. and Iden, S. C.: The improved integral suspension pressure method (ISP+) for precise particle size analysis of soil and sedimentary materials, Soil Till. Res., 213, 105086, https://doi.org/10.1016/j.still.2021.105086, 2021.

Durner, W., Iden, S. C., and von Unold, G.: The integral suspension pressure method (ISP) for precise particle-size analysis by gravitational sedimentation, Water Resour. Res., 53, 33–48, https://doi.org/10.1002/2016WR019830, 2017.

Fatichi, S., Or, D., Walko, R., Vereecken, H., Young, M. H., Ghezzehei, T. A., Hengl, T., Kollet, S., Agam, N., and Avissar, R.: Soil structure is an important omission in Earth System Models, Nat. Commun., 11, 1–11, https://doi.org/10.1038/s41467-020-14411-z, 2020.

Germer, K. and Braun, J.: Multi-step outflow and evaporation experiments–Gaining large undisturbed samples and comparison of the two methods, J Hydrol., 577, 123914, https://doi.org/10.1016/j.jhydrol.2019.123914, 2019.

Gupta, S., Papritz, A., Lehmann, P., Hengl, T., Bonetti, S., and Or, D.: Global Soil Hydraulic Properties dataset based on legacy site observations and robust parameterization, Sci. Data, 9, 1–15, https://doi.org/10.1038/s41597-022-01481-5, 2022.

Hohenbrink, T. L., Jackisch, C., Durner, W., Germer, K., Iden, S. C., Kreiselmeier, J., Leuther, F., Metzger, J. C., Naseri, M., and Peters, A.: Soil hydraulic characteristics in a wide range of saturation and soil properties, GFZ Data Services [data set], https://doi.org/10.5880/fidgeo.2023.012, 2023.

Iden, S. C., Peters, A., and Durner, W.: Improving prediction of hydraulic conductivity by constraining capillary bundle mod-

els to a maximum pore size, Adv. Water Resour., 85, 86–92, https://doi.org/10.1016/j.advwatres.2015.09.005, 2015.

Jackisch, C., Angermann, L., Allroggen, N., Sprenger, M., Blume, T., Tronicke, J., and Zehe, E.: Form and function in hillslope hydrology: in situ imaging and characterization of flow-relevant structures, Hydrol. Earth Syst. Sci., 21, 3749–3775, https://doi.org/10.5194/hess-21-3749-2017, 2017.

Jackisch, C., Germer, K., Graeff, T., Andrä, I., Schulz, K., Schiedung, M., Haller-Jans, J., Schneider, J., Jaquemotte, J., Helmer, P., Lotz, L., Bauer, A., Hahn, I., Šanda, M., Kumpan, M., Dorner, J., de Rooij, G., Wessel-Bothe, S., Kottmann, L., Schittenhelm, S., and Durner, W.: Soil moisture and matric potential – an open field comparison of sensor systems, Earth Syst. Sci. Data, 12, 683–697, https://doi.org/10.5194/essd-12-683-2020, 2020.

Jarvis, N. J.: A review of non-equilibrium water flow and solute transport in soil macropores: principles, controlling factors and consequences for water quality, Soil Sci., 58, 523–546, https://doi.org/10.1111/j.1365-2389.2007.00915.x, 2007.

Kirste, B., Iden, S. C., and Durner, W.: Determination of the Soil Water Retention Curve around the Wilting Point: Optimized Protocol for the Dewpoint Method, Soil Sci. Soc. Am. J., 83, 288–299, https://doi.org/10.2136/sssaj2018.08.0286, 2019.

Köhn, M.: Die mechanische Analyse des Bodens mittels Pipettmethode, Z Pflanz. Bodenkunde, 21, 211–222, https://doi.org/10.1002/jpln.19310210206, 1931.

Kreiselmeier, J., Chandrasekhar, P., Weninger, T., Schwen, A., Julich, S., Feger, K.-H., and Schwärzel, K.: Quantification of soil pore dynamics during a winter wheat cropping cycle under different tillage regimes, Soil Till. Res., 192, 222–232, https://doi.org/10.1016/j.still.2019.05.014, 2019.

Kreiselmeier, J., Chandrasekhar, P., Weninger, T., Schwen, A., Julich, S., Feger, K.-H., and Schwärzel, K.: Temporal variations of the hydraulic conductivity characteristic under conventional and conservation tillage, Geoderma, 362, 114127, https://doi.org/10.1016/j.geoderma.2019.114127, 2020.

Leuther, F., Schlüter, S., Wallach, R., and Vogel, H.-J.: Structure and hydraulic properties in soils under long-term irrigation with treated wastewater, Geoderma, 333, 90–98, https://doi.org/10.1016/j.geoderma.2018.07.015, 2019.

Meter Group AG: Operation Manual KSAT, https://library.metergroup.com/Manuals/UMS/KSAT_Manual.pdf, last access: 16 August 2023.

Metzger, J. C., Filipzik, J., Michalzik, B., and Hildebrandt, A.: Stemflow Infiltration Hotspots Create Soil Microsites Near Tree Stems in an Unmanaged Mixed Beech Forest, Front. For. Glob. Change, 4, 701293, https://doi.org/10.3389/ffgc.2021.701293, 2021.

Moeys, J.: soiltexture: Functions for Soil Texture Plot, Classification and Transformation, R package version 1.5.1 [code], https://CRAN.R-project.org/package=soiltexture (last access: 16 August 2023), 2018.

Moshrefi, N.: A new method of sampling soil suspension for particle-size analysis, Soil Sci., 155, 245–248, https://doi.org/10.1097/00010694-199304000-00002, 1993.

Mualem, Y.: A New Model for Predicting the Hydraulic Conductivity of Unsaturated Porous Media, Water Resour. Res., 12, 513–522, https://doi.org/10.1029/WR012i003p00513, 1976.

Nemes, A., Schaap, M., Leij, F., and Wösten, J.: Description of the unsaturated soil hydraulic database UNSODA version 2.0, J. Hydrol., 251, 151–162, https://doi.org/10.1016/S0022-1694(01)00465-6, 2001.

Nemes, A., Wösten, J. H. M., Lilly, A., and Oude Voshaar, J. H.: Evaluation of different procedures to interpolate particle-size distributions to achieve compatibility within soil databases, Geoderma, 90, 187–202, https://doi.org/10.1016/S0016-7061(99)00014-2, 1999.

Nimmo, J. R.: Comment on the treatment of residual water content in "A consistent set of parametric models for the two-phase flow of immiscible fluids in the subsurface" by L. Luckner et al., Water Resour. Res., 27, 661–662, https://doi.org/10.1029/91WR00165, 1991.

Ottoni, M. V., Ottoni Filho, T. B., Schaap, M. G., Lopes-Assad, M. L. R., and Rotunno Filho, O. C.: Hydrophysical Database for Brazilian Soils (HYBRAS) and Pedotransfer Functions for Water Retention, Vadose Zone J., 17, 170095. https://doi.org/10.2136/vzj2017.05.0095, 2018.

Pertassek, T., Peters, A., and Durner, W.: HYPROP-FIT software user's manual, V. 3.0, UMS GmbH, Munich, Germany, https://library.metergroup.com/Manuals/UMS/Hyprop_Manual.pdf, (last access: 16 August 2023), 2015.

Peters, A.: Simple consistent models for water retention and hydraulic conductivity in the complete moisture range, Water Resour. Res., 49, 6765–6780, https://doi.org/10.1002/wrcr.20548, 2013.

Peters, A. and Durner, W.: Simplified evaporation method for determining soil hydraulic properties, J. Hydrol., 356, 147–162, https://doi.org/10.1016/j.jhydrol.2008.04.016, 2008.

Peters, A. and Durner, W.: SHYPFIT 2.0 User's Manual, Research Report, Institut für Ökologie [code], Technische Universität Berlin, Germany, 2015.

Peters, A., Hohenbrink, T. L., Iden, S. C., and Durner, W.: A Simple Model to Predict Hydraulic Conductivity in Medium to Dry Soil From the Water Retention Curve, Water Resour. Res., 57, e2020WR029211, https://doi.org/10.1029/2020WR029211, 2021.

Peters, A., Hohenbrink, T. L., Iden, S. C., van Genuchten, M. Th., and Durner, W.: Prediction of the absolute hydraulic conductivity function from soil water retention data, Hydrol. Earth Syst. Sci., 27, 1565–1582, https://doi.org/10.5194/hess-27-1565-2023, 2023.

R Core Team: R: A Language and Environment for Statistical Computing, R Foundation for Statistical Computing [code], Vienna, Austria, https://www.R-project.org/ (last access: 16 August 2023), 2020.

Sarkar, S., Germer, K., Maity, R., and Durner, W.: Measuring near-saturated hydraulic conductivity of soils by quasi unit-gradient percolation – 1. Theory and numerical analysis, J. Plant. Nutr. Soil Sc., 182, 524–534, https://doi.org/10.1002/jpln.201800382, 2019a.

Sarkar, S., Germer, K., Maity, R., and Durner, W.: Measuring near-saturated hydraulic conductivity of soils by quasi unit-gradient percolation – 2. Application of the methodology, J. Plant. Nutr. Soil Sc., 182, 535–540, https://doi.org/10.1002/jpln.201800383, 2019b.

Schaap, M. G., Leij, F. J., and Van Genuchten, M. T.: ROSETTA: a computer program for estimating soil hydraulic parameters with

hierarchical pedotransfer functions, J. Hydrol., 251, 163–176, https://doi.org/10.1016/S0022-1694(01)00466-8, 2001.

Schindler, U.: Ein Schnellverfahren zur Messung der Wasserleit-fähigkeit im teilgesättigten Boden an Stechzylinderproben, Arch. Acker- u. Pflanzenbau u. Bodenkd., Berlin, 24, 1–7, 1980.

Schindler, U., Durner, W., Von Unold, G., Mueller, L., and Wieland, R.: The evaporation method: Extending the measure-ment range of soil hydraulic properties using the air-entry pres-sure of the ceramic cup, J. Plant. Nutr. Soil. Sc., 173, 563–572, https://doi.org/10.1002/jpln.200900201, 2010.

Schindler, U. G. and Müller, L.: Soil hydraulic func-tions of international soils measured with the Extended Evaporation Method (EEM) and the HYPROP device, Open Data Journal for Agricultural Research, 3, 10–16, https://doi.org/10.18174/odjar.v3i1.15763, 2017.

Schneider, M. and Goss, K.-U.: Prediction of the water sorp-tion isotherm in air dry soils, Geoderma, 170, 64–69, https://doi.org/10.1016/j.geoderma.2011.10.008, 2012.

Tuller, M. and Or, D.: Water films and scaling of soil characteristic curves at low water contents, Water Resour. Res., 41, W09403, https://doi.org/10.1029/2005WR004142, 2005.

Twarakavi, N. K. C., Šimůnek, J., and Schaap, M. G.: Can texture-based classification optimally classify soils with re-spect to soil hydraulics?, Water Resour. Res., 46, W01501, https://doi.org/10.1029/2009wr007939, 2010.

USDA: Soil Taxonomy: A Basic System of Soil Classi-fication for Making and Interpreting Soil Surveys, 2nd Edn., United States Department of Agriculture, Washing-ton DC, USA, https://www.nrcs.usda.gov/sites/default/files/2022-06/SoilTaxonomy.pdf (last access: 30 September 2023), 1999.

Van Genuchten, M. T.: A Closed-form Equation for Predicting the Hydraulic Conductivity of Unsatu-rated Soils, Soil. Sci. Soc. Am. J., 44, 892–898, https://doi.org/10.2136/sssaj1980.03615995004400050002x, 1980.

Van Looy, K., Bouma, J., Herbst, M., Koestel, J., Minasny, B., Mishra, U., Montzka, C., Nemes, A., Pachepsky, Y. A., Padar-ian, J., and others: Pedotransfer Functions in Earth System Sci-ence: Challenges and Perspectives, Rev. Geophys., 55, 1199–1256, https://doi.org/10.1002/2017RG000581, 2017.

Vereecken, H., Weynants, M., Javaux, M., Pachepsky, Y., Schaap, M., and Genuchten, M. T.: Using Pedotransfer Func-tions to Estimate the van Genuchten–Mualem Soil Hy-draulic Properties: A Review, Vadose Zone J., 9, 795–820, https://doi.org/10.2136/vzj2010.0045, 2010.

Weihermüller, L., Lehmann, P., Herbst, M., Rahmati, M., Verhoef, A., Or, D., Jacques, D., and Vereecken, H.: Choice of Pedo-transfer Functions Matters when Simulating Soil Water Bal-ance Fluxes, J. Adv. Model Earth. Sy., 13, e2020MS002404, https://doi.org/10.1029/2020MS002404, 2021.

Weynants, M., Vereecken, H., and Javaux, M.: Revisit-ing Vereecken Pedotransfer Functions: Introducing a Closed-Form Hydraulic Model, Vadose Zone J., 8, 86–95, https://doi.org/10.2136/vzj2008.0062, 2009.

Weynants, M., Montanarella, L., Toth, G., Arnoldussen, A., Anaya Romero, M., Bilas, G., Borresen, T., Cornelis, W., Daroussin, J., Gonçalves, M. D. C., Haugen, L. E., Hennings, V., Houskova, B., Iovino, M., Javaux, M., Keay, C. A., Kätterer, T., Kvaerno, S., Laktinova, T., Lamorski, K., Lilly, A., Mako, A., Mat-ula, S., Morari, F., Nemes, A., Patyka, N. V., Romano, N., Schindler, U., Shein, E., Slawinski, C., Strauss, P., Tóth, B., and Woesten, H.: European HYdropedological Data Inventory (EU-HYDI), EUR Scientific and Technical Research Series, vol. EUR 26053 EN, Publications Office of the European Union, https://doi.org/10.2788/5936, 2013.

Wilkinson, M. D., Dumontier, M., Aalbersberg, I. J., Appleton, G., Axton, M., Baak, A., Blomberg, N., Boiten, J.-W., Silva Santos, L. B. da, Bourne, P. E., Bouwman, J., Brookes, A. J., Clark, T., Crosas, M., Dillo, I., Dumon, O., Edmunds, S., Evelo, C. T., Finkers, R., Gonzalez-Beltran, A., Gray, A. J. G., Groth, P., Goble, C., Grethe, J. S., Heringa, J., Hoen, P. A. C. t, Hooft, R., Kuhn, T., Kok, R., Kok, J., Lusher, S. J., Martone, M. E., Mons, A., Packer, A. L., Persson, B., Rocca-Serra, P., Roos, M., Schaik, R. van, Sansone, S.-A., Schultes, E., Sengstag, T., Slater, T., Strawn, G., Swertz, M. A., Thomp-son, M., Van Der Lei, J., Van Mulligen, E., Velterop, J., Waag-meester, A., Wittenburg, P., Wolstencroft, K., Zhao, J., and Mons, B.: Comment: The FAIR Guiding Principles for scien-tific data management and stewardship, Sci. Data, 3, 160018, https://doi.org/10.1038/sdata.2016.18, 2016.

Wösten, J., Lilly, A., Nemes, A., and Le Bas, C.: Development and use of a database of hydraulic properties of European soils, Geoderma, 90, 169–185, https://doi.org/10.1016/S0016-7061(98)00132-3, 1999.

Zhang, Y. and Schaap, M. G.: Weighted recalibration of the Rosetta pedotransfer model with improved estimates of hydraulic param-eter distributions and summary statistics (Rosetta3), J. Hydrol., 547, 39–53, https://doi.org/10.1016/j.jhydrol.2017.01.004, 2017.

Zhang, Y., Weihermüller, L., Toth, B., Noman, M., and Vereecken, H.: Analyzing dual porosity in soil hydraulic properties using soil databases for pedotransfer function development, Vadose Zone J., 21, e20227, https://doi.org/10.1002/vzj2.20227, 2022.