


# YSK 750

## Mid-Rise Sloped Glazing System for Curtain Walls



### SLOPED GLAZING

#### Product Description

YSK 750 is a complete slope glazed framing system designed for curtain walls with long rafters.

The system incorporates an integral gutter that may be set directly down onto a curb or on top of a vertical curtain wall. The unique hinge will accommodate slope angles from fifteen to sixty degrees and provide positive anchorage for the slope. Purlins (horizontal members) are available with a variety of face covers to meet design requirements or may be structural silicone glazed for a clean, uninterrupted appearance.

YSK 750 is available in stock lengths or may be factory engineered and fabricated.

#### Product Options & Features

- Angle of slope can be tailored to your project
- Outside Glazing of 1" or 5/16"
- Easy to assemble with YKK AP Curtain Walls
- Variety of face covers to match your design



Quality  
inspires®



# YSK 750

## SYSTEM SPECIFICATIONS

| System Sightline  | Base Depth | Glazing & Config | Glass                                     | Air Infiltration  | Water Infiltration  | Thermal Performance  | Acoustical Performance |
|-------------------|------------|------------------|---|---|---|----------------------|------------------------|
| Angle Dependant   | 7-1/2"     | Outside & Front  | 1" IGU with Low-E (C.O.G. U-factor: 0.29) | 0.06 CFM/FT <sup>2</sup> (1.10 m <sup>3</sup> /h·m <sup>2</sup> ) @ 6.24 PSF (299 Pa) | <b>Static:</b> 15 PSF (718 Pa)<br><b>Dynamic:</b> 15 PSF (718 Pa) | N/A                  | N/A                    |
| Testing Standards |            |                  |   | ASTM E 283  | ASTM E 331 & AAMA 501.1   | NFRC 100 & AAMA 1503 | ASTM E 90 & 1425       |



### Optional Depths

**5/16" Glass** and **1" Glass** options are available with our sloped system.


### Available Finishes

Factory Anodized (AAMA 612) and Organic Paints (AAMA 2604 & AAMA 2605)

## A CLOSER LOOK

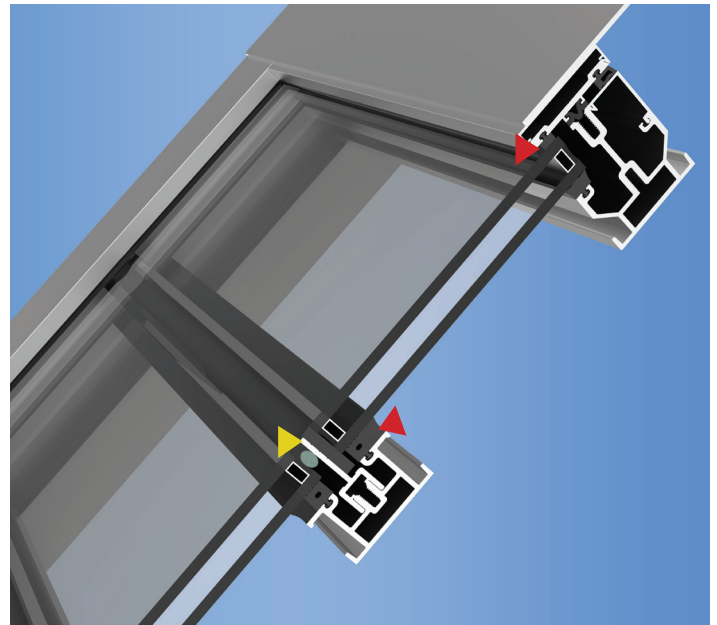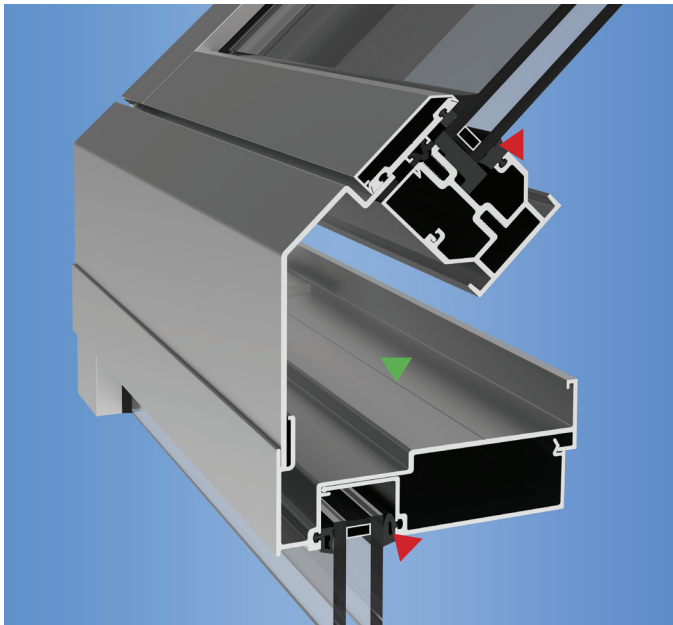

- ▶ **INTEGRATED GUTTER** - Built in the slope system that will sit flush on a curtain wall or slab to help redirect any water.
- ▶ **TAILORED GLAZING** - Wet and Dry Glazing combinations ensure the best support for the sloped glazing applied to the system
- ▶ **INTEGRATED STRUCTURAL SUPPORT** - Carry dead load of the insulating glass, diverting load away from struts

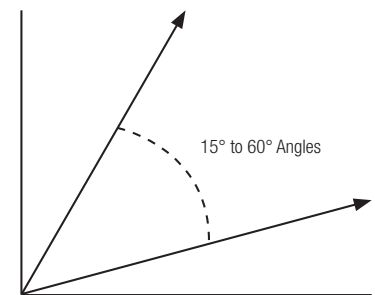

Additional information including CAD details, CSI specifications, Test Reports and Installation instructions are available online at:

[www.ykkap.com/commercial/product/sloped-glazing/ysk-750/](http://www.ykkap.com/commercial/product/sloped-glazing/ysk-750/)