

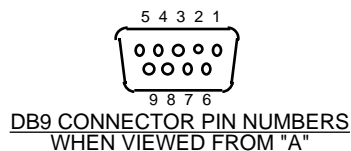
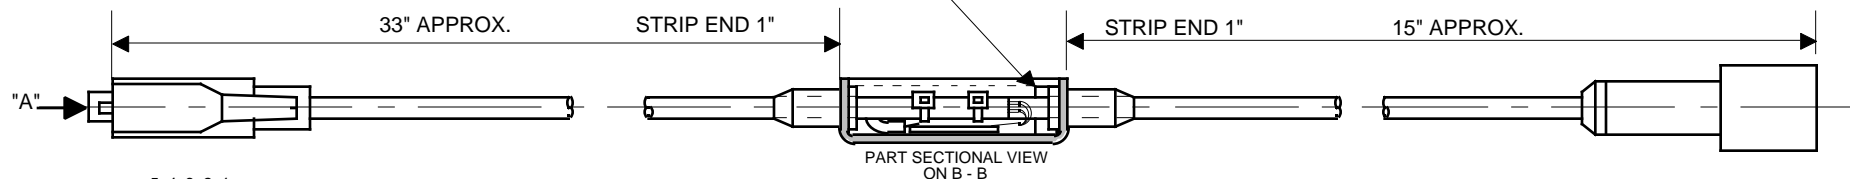


****USE 2" OF PC CABLE TO CONNECT
EACH END OF THE CABLES WITH TIE WRAPS FOR STRENGTH**

REV..	E.C.N.	DESCRIPTION	DATE
XA	-	DEVELOPMENT	06/03
A	-	RELEASE	04/04

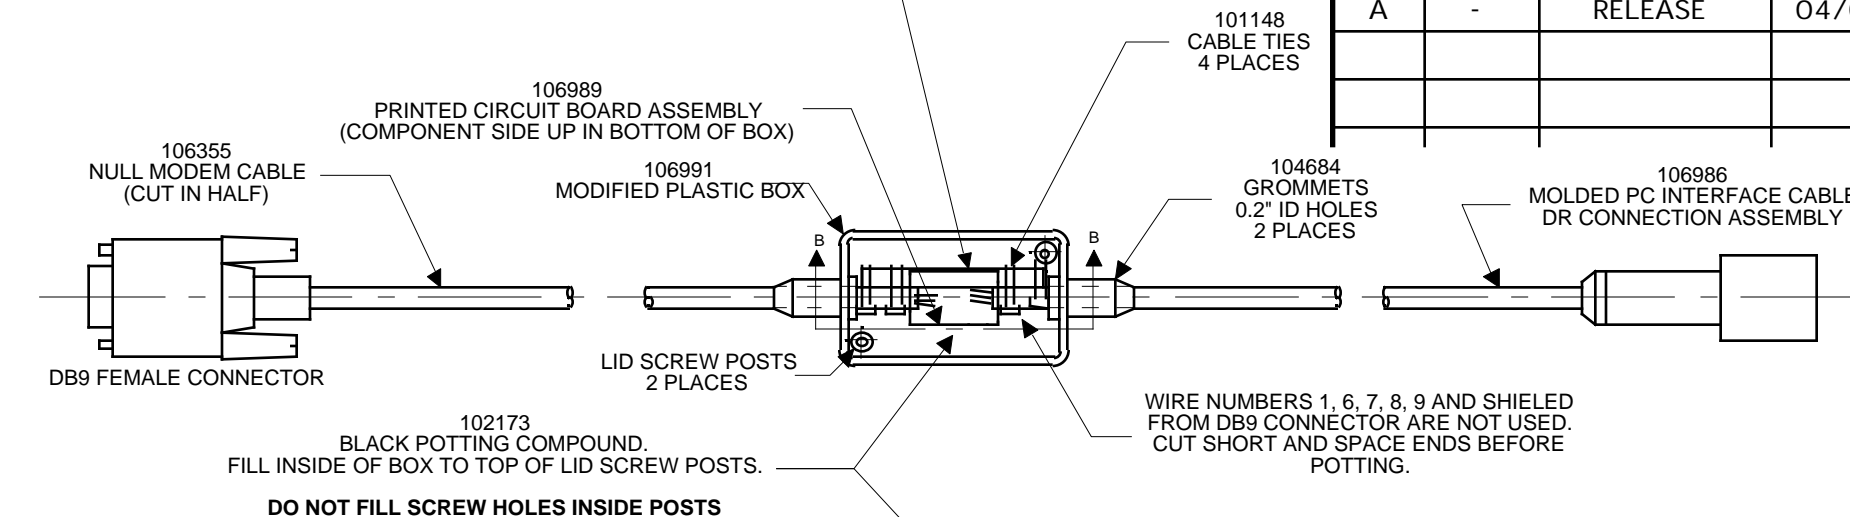

1) WIRE COLOURS IN NULL MODEM CABLE MAY CHANGE DEPENDING ON MANUFACTURER AND WHICH END OF THE CABLE IS BEING USED (PINS 2 AND 3 MAY BE CROSSED)

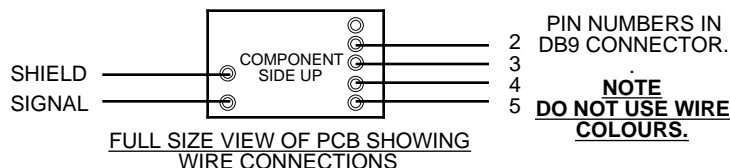

Uncontrolled Copy

****TESTER No,2,3,4,5, FOR WIRES**

17-JUNE-03

Tolerances .XXX +/- .003" .XX +/- .010" .X +/- .020" Fractional +/- 1/64" Angles +/- 30'	 Fax: (905) 873-1992 Tel: (905) 873-2255 or (800) 661-2023 35 Todd Road, Georgetown, ON, Canada L7G 4R 8	Scale: 1 : 2	Date: JUNE 17, 2003	TITLE: DIRECT READ INTERFACE MKII CABLE ASSEMBLY	
		Drawn: K. COGGON	Approved:		
		Checked:		Finish:	
		MATERIAL:		DRAWING NO. 106985	REV. A