

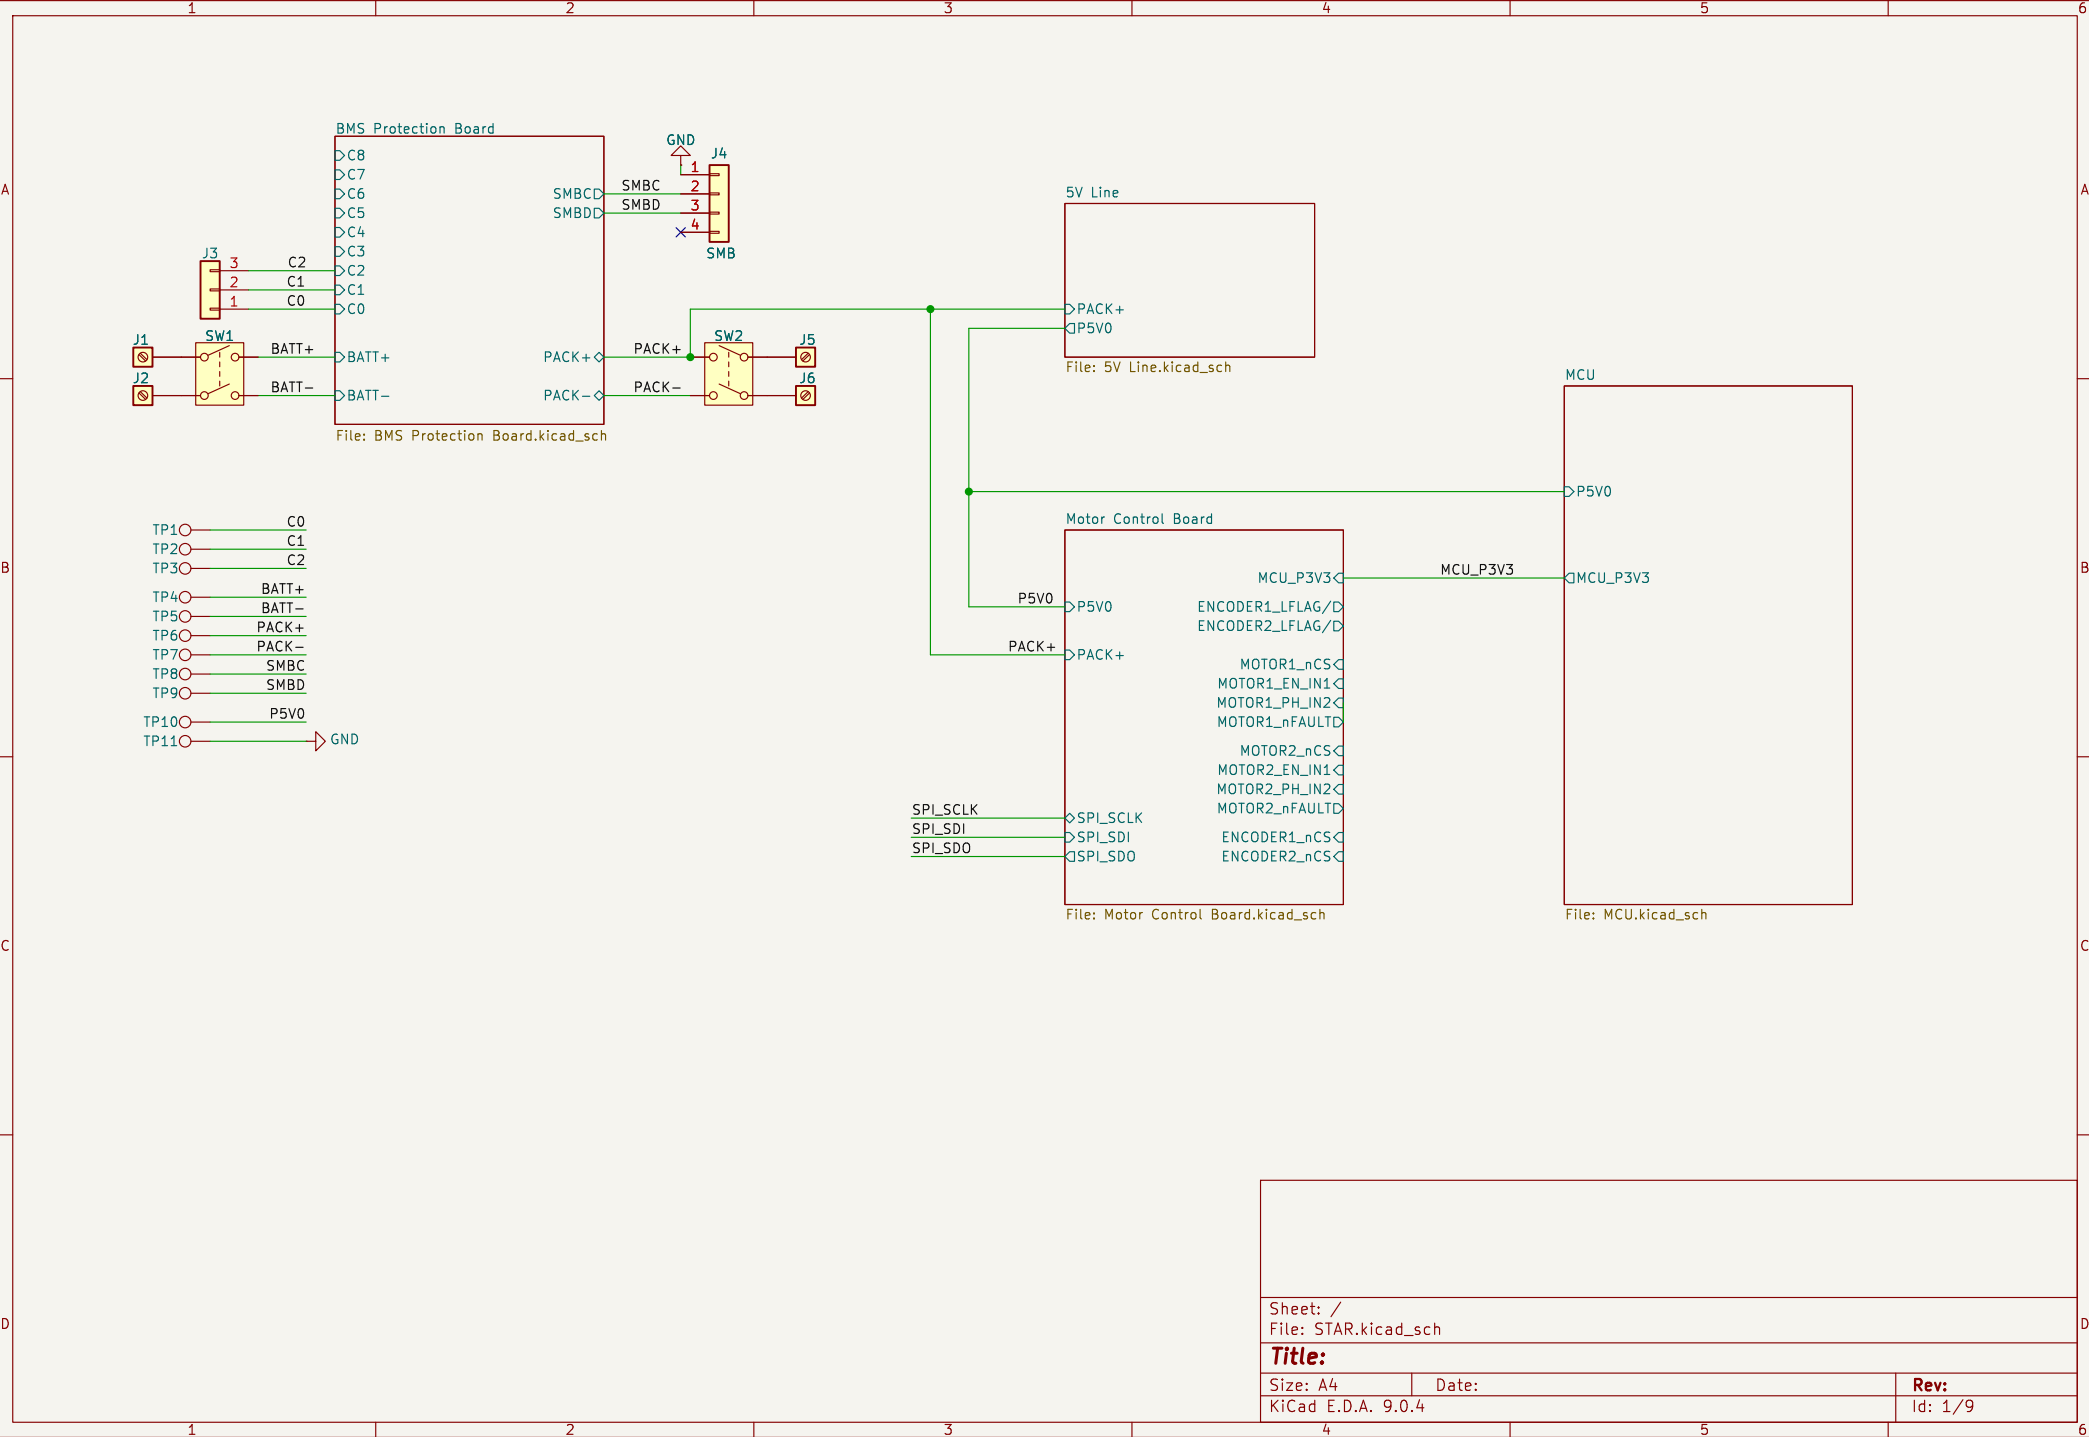
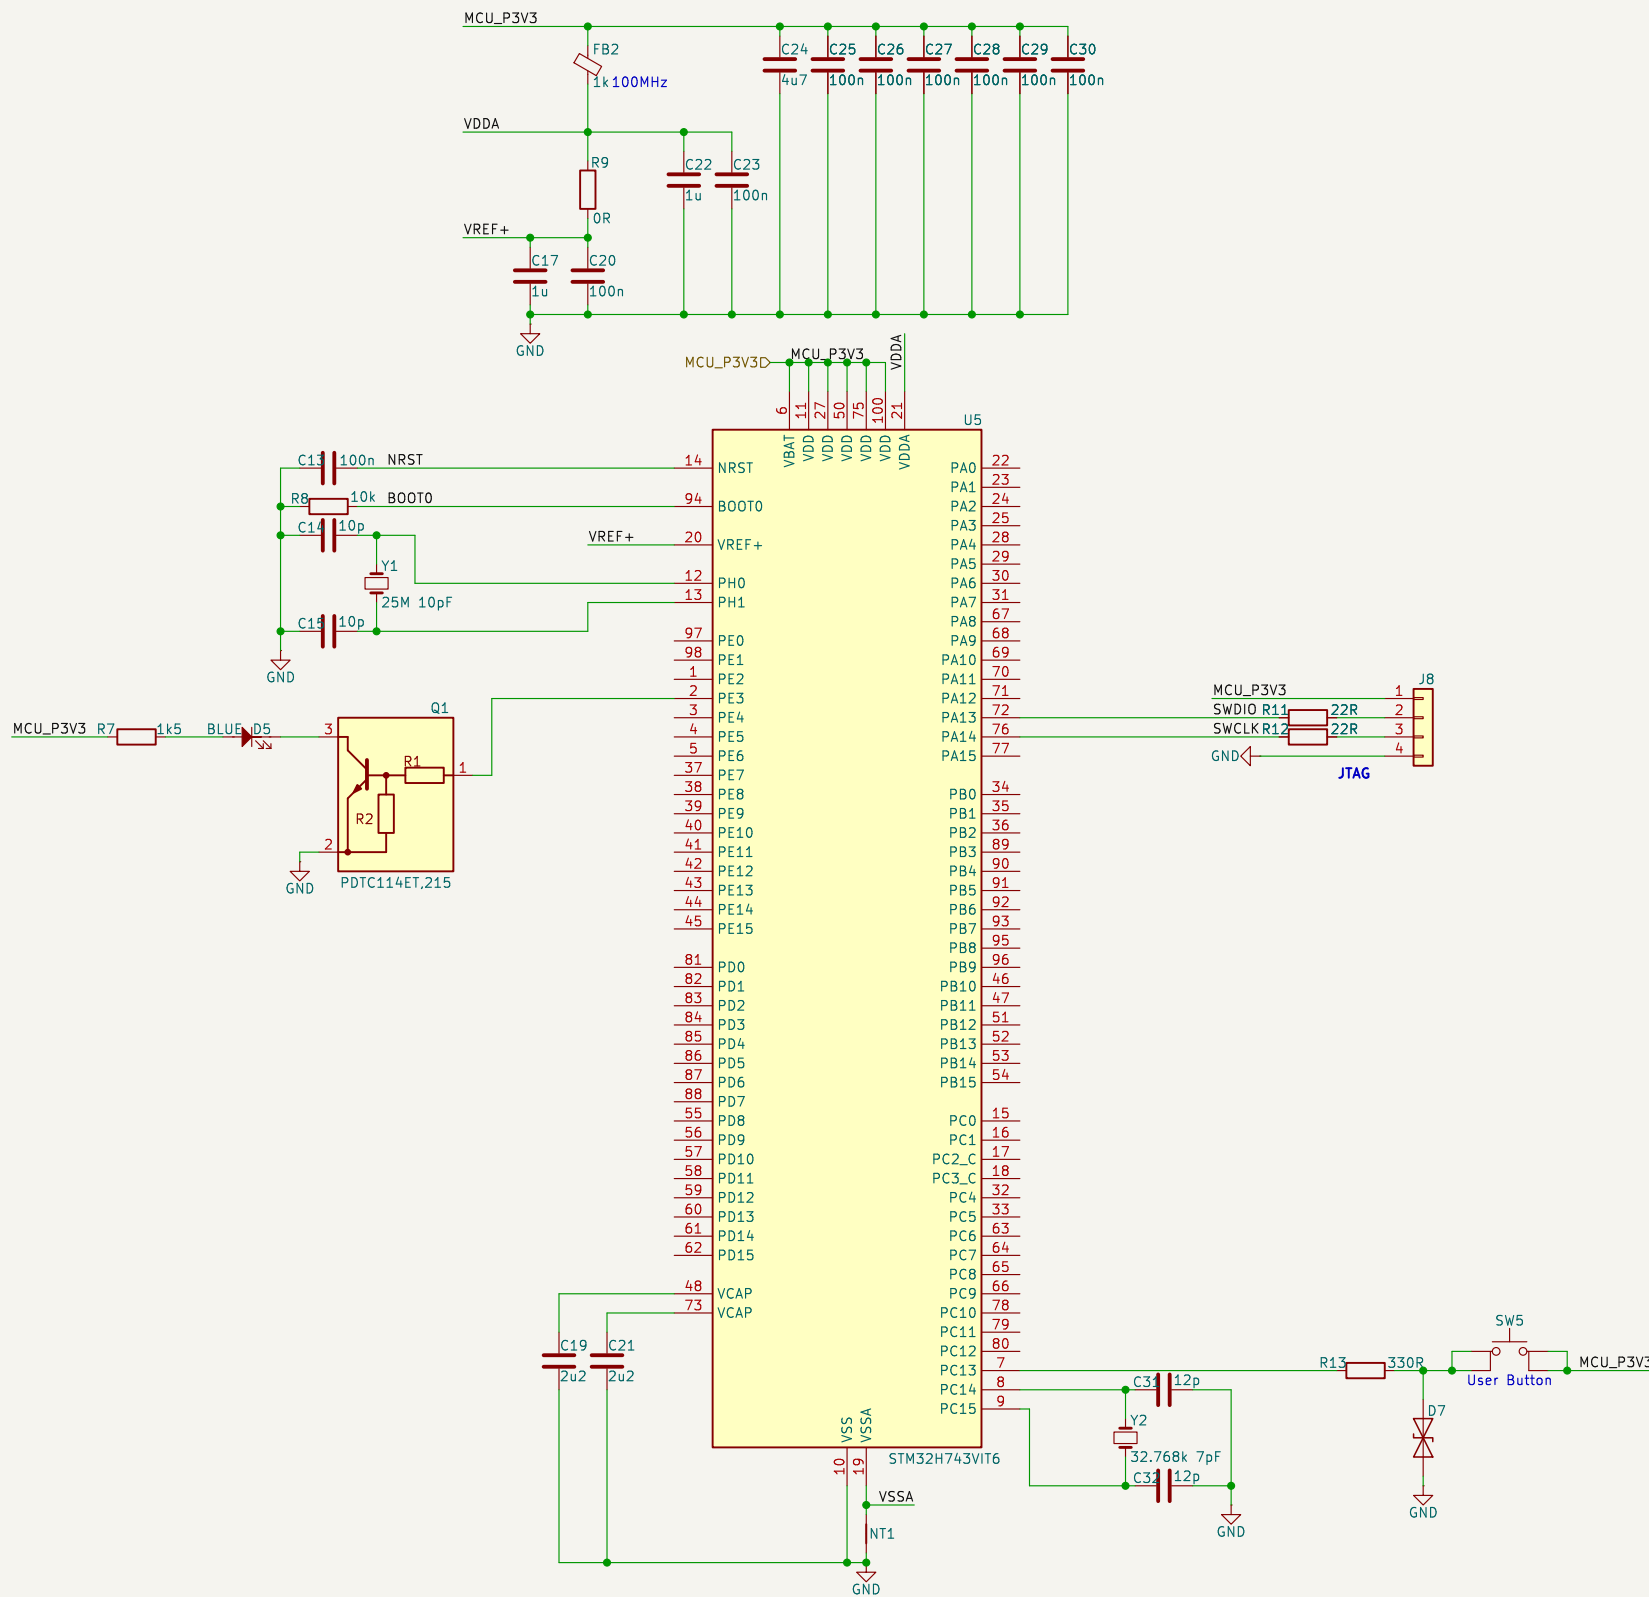
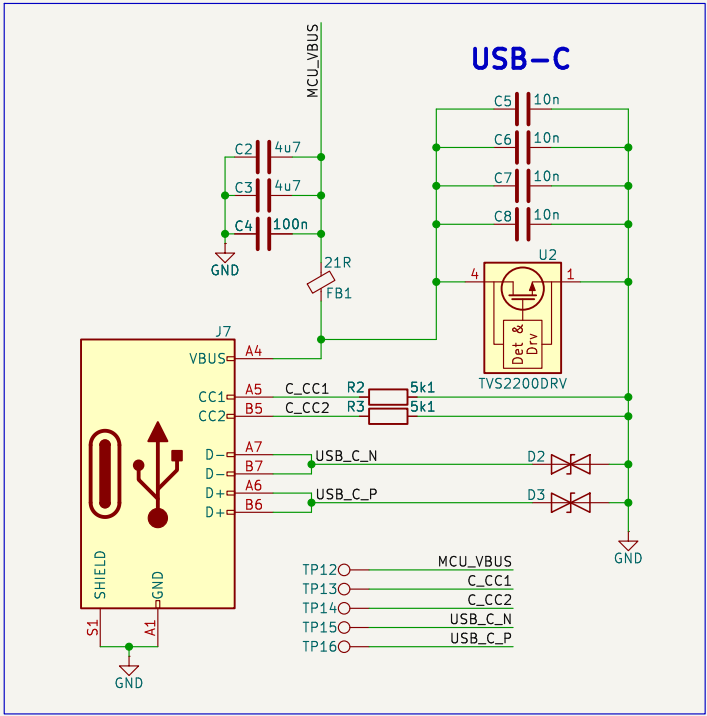


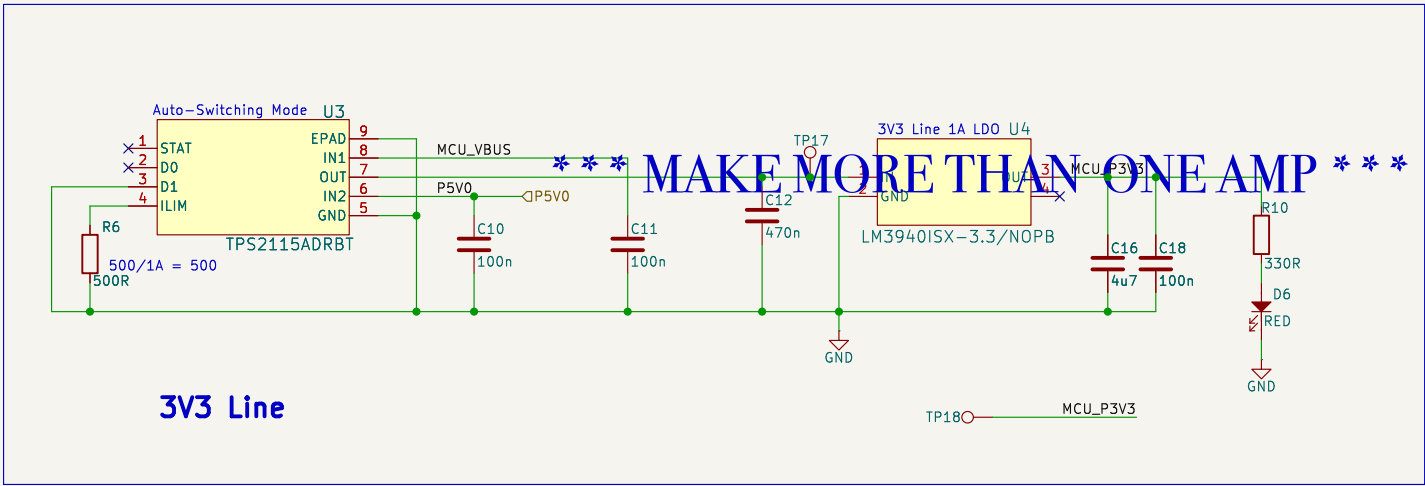

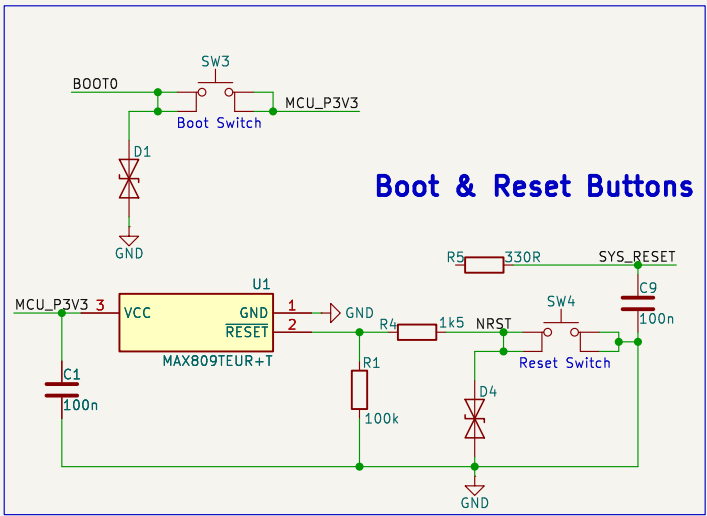

*** REDO THE CALCULATIONS ***

Wake-Up

Thermistors

Balancing & BMC (AFE)

Pack Switching and Current Sensing

Fuel Gauge

*** REDO THE CALCULATIONS ***


High-Side Gate Driver

BMS Protection Board for 3S Battery Pack
In/Out: min voltage: 9.6 V, nominal voltage: 11.1 V, max voltage: 12.6 V
Output: 20A continuous discharge current
Min Each Cell set to 3.2 V, Max Each Cell set to 4.2 V

1	2	3	4	5	6
A					A
B					B
C					C
D					D
1	2	3	4	5	6

*** IMPLEMENENT ***

Sheet: /5V Line/ File: 5V Line.kicad_sch		
Title:		
Size: A4	Date:	Rev:
KiCad E.D.A. 9.0.4		Id: 4/9

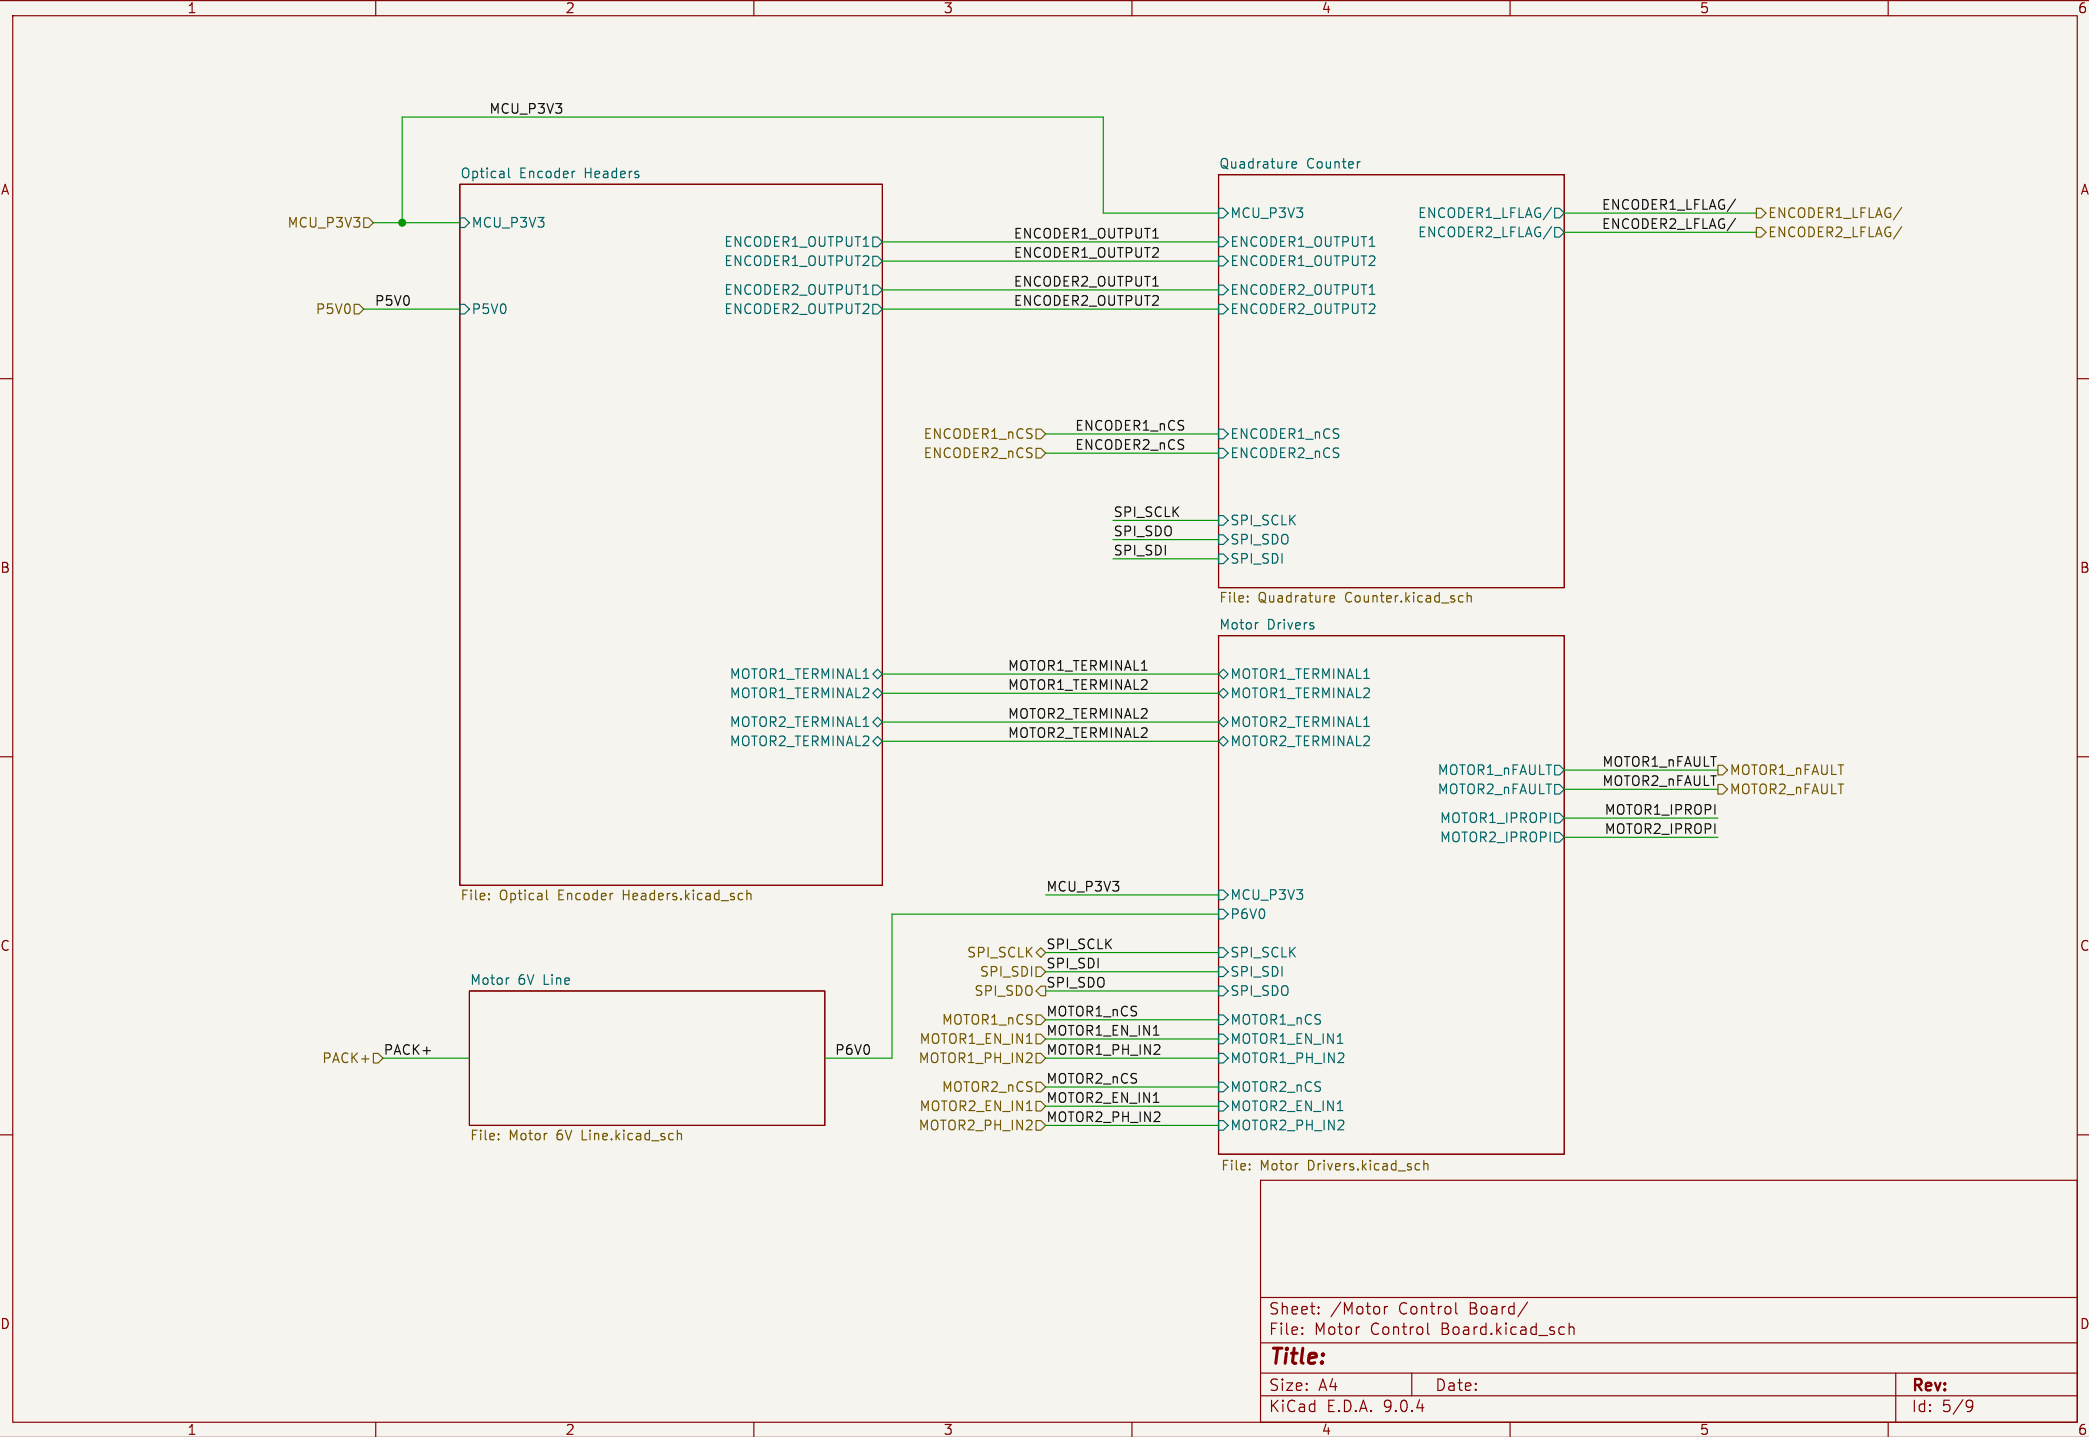

Sheet: /Motor Control Board/
File: Motor Control Board.kicad_sch

Title:

Size: A4

Date:

Rev:

KiCad E.D.A. 9.0.4

Id: 5/9



*** IMPLEMENENT ***

Sheet: /Motor Control Board/Motor 6V Line/
File: Motor 6V Line.kicad_sch

Title:		
Size: A4	Date:	Rev:
KiCad E.D.A. 9.0.4		Id: 6/9

(1) Red	motor power (connects to one motor terminal)
(2) Black	motor power (connects to the other motor terminal)
(3) Green	encoder GND
(4) Blue	encoder Vcc (3.5 – 20 V)
(5) Yellow	encoder A output
(6) White	encoder B output

- TP36○ ENC_GND
- TP37○ MOTOR1_TERMINAL1
- TP38○ MOTOR1_TERMINAL2
- TP39○ ENCODER1_OUTPUT1_5V
- TP40○ ENCODER1_OUTPUT2_5V
- TP41○ MOTOR2_TERMINAL1
- TP42○ MOTOR2_TERMINAL2
- TP43○ ENCODER2_OUTPUT1_5V
- TP44○ ENCODER2_OUTPUT2_5V
- TP45○ ENCODER1_OUTPUT1
- TP46○ ENCODER1_OUTPUT2
- TP47○ ENCODER2_OUTPUT1
- TP48○ ENCODER2_OUTPUT2

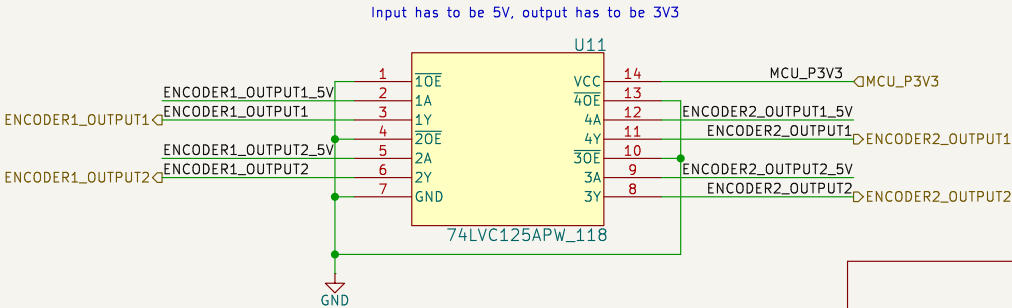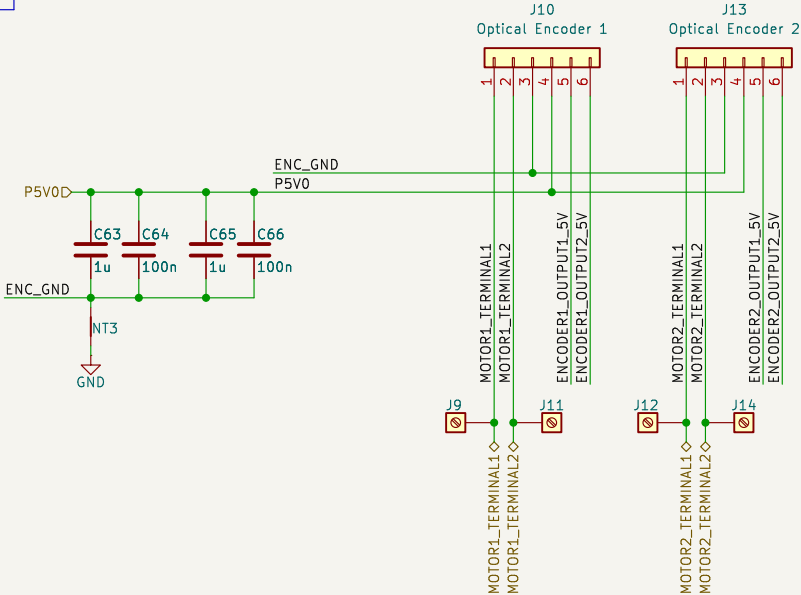

Sheet: /Motor Control Board/Optical Encoder Headers/
File: Optical Encoder Headers.kicad_sch

Title:



Size: A4

Date:

Rev:

KiCad E.D.A. 9.0.4

Id: 7/9

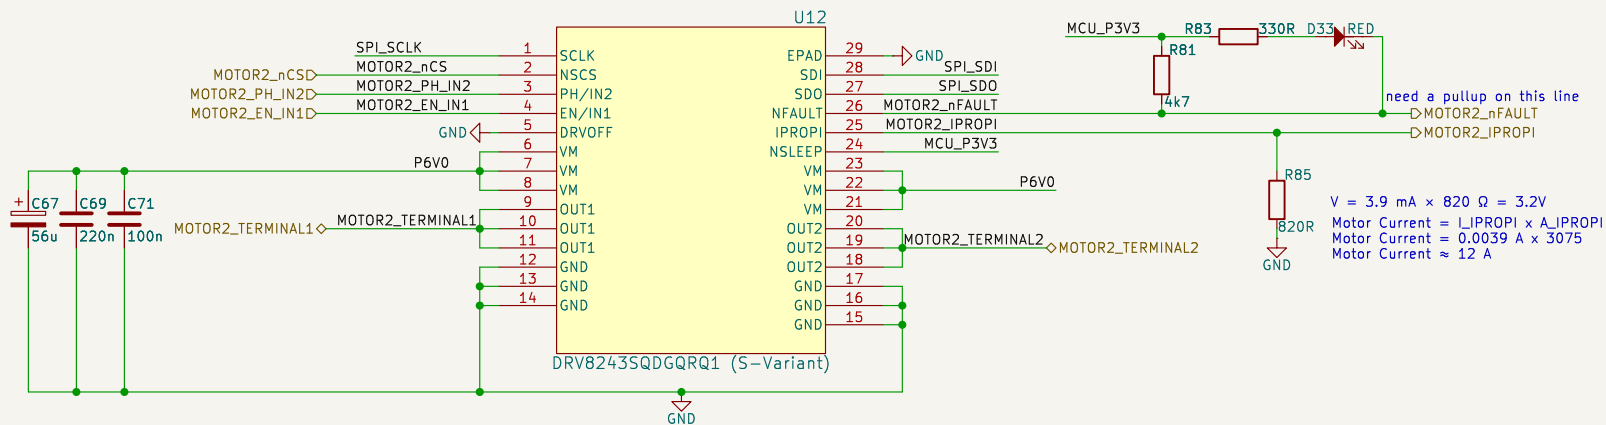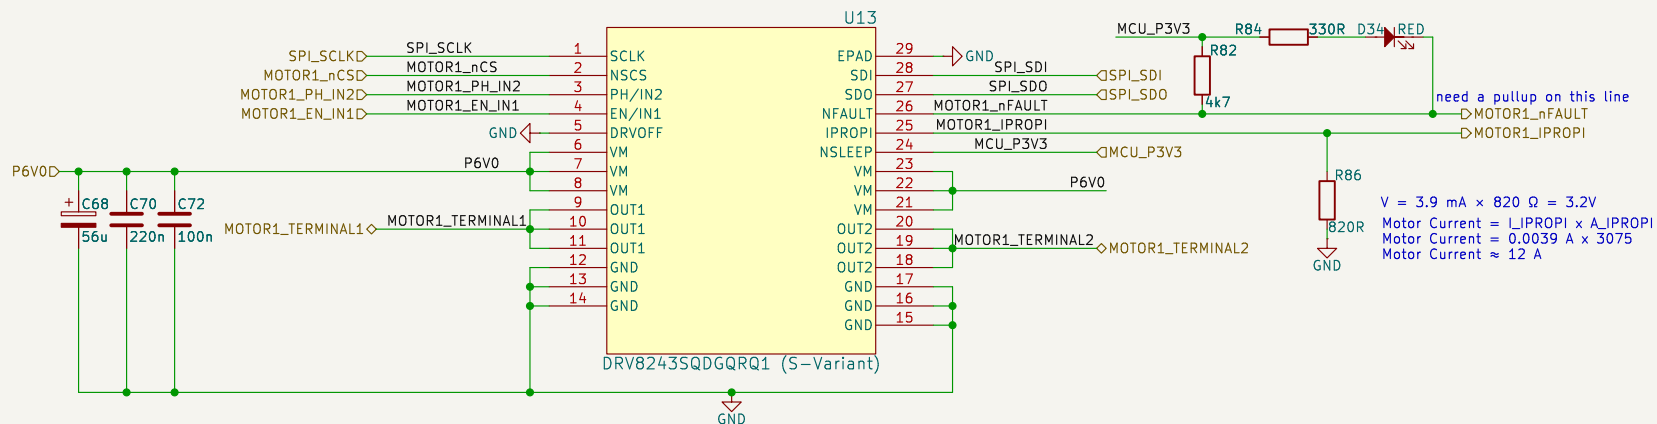

Sheet: /Motor Control Board/Motor Drivers/
 File: Motor Drivers.kicad_sch

Title:


Size: A4

Date:

KiCad E.D.A. 9.0.4

Rev:

Id: 8/9

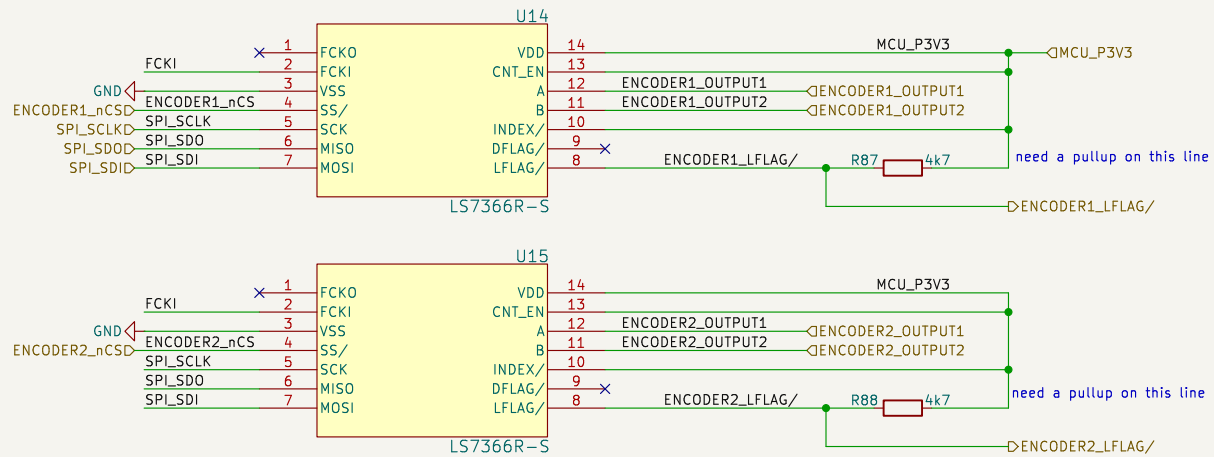

Id: 9/9