


For the SPI (P) variant, you can set the SCLK frequency up to 10 MHz.
For the SPI (S) variant, the maximum is 10 MHz, but you should reduce it to 8 MHz if you have a 20 pF load on the COPI line.

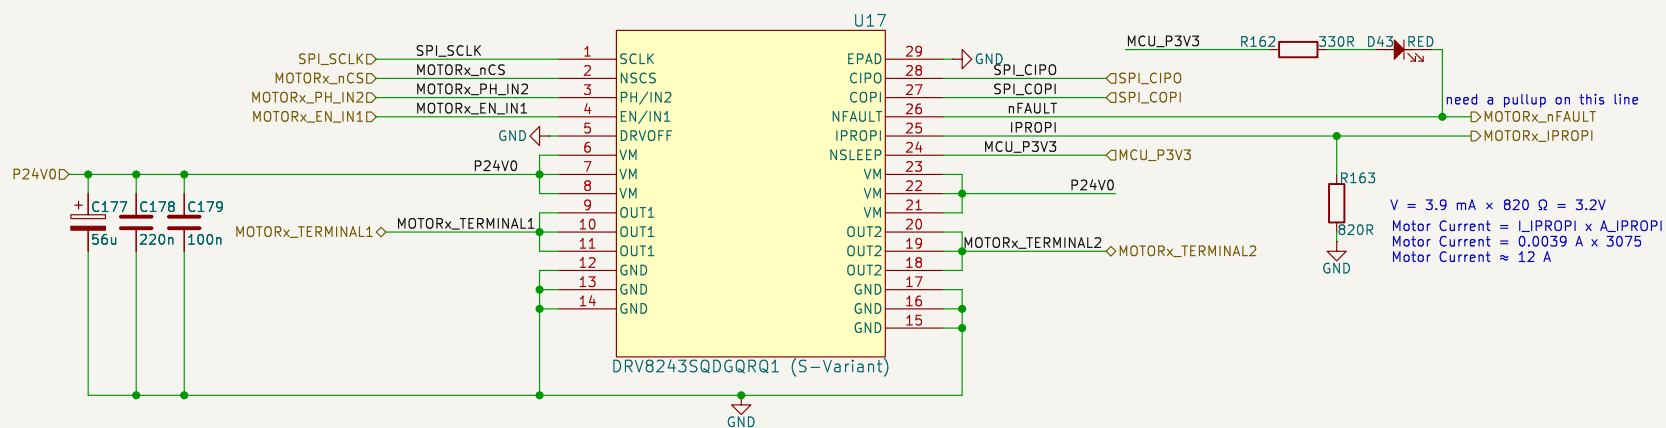

Sheet: /
File: Motor with Driver.kicad_sch

Title:

Size: A4

Date:

KiCad E.D.A. 9.0.5

Rev:

Id: 1/1