

GENERAL INFORMATION

The DMX/RDM Two-Port Gateway provides network data distribution of RDM and data-level information. Built on the reliability and quality of ETC's Network development, DMX/RDM Gateways are built for the industry-standard ACN protocol. The Gateway is an Ethernet device that uses bidirectional communication with other network devices to send and receive DMX512 and RDM data, as well as ACN/sACN.

APPLICATIONS

- Roadhouses
- Touring
- University/professional theaters
- Convention halls
- Tech tables
- Stage manager panels
- System integration

FEATURES

- Distributed DMX and RDM over Ethernet
- Supports Net3 protocol powered by ACN
- DMX/RDM Output/Input
- Distributes DMX data to any input/output device
- Two DMX connections using 5-pin Male or Female XLR
- LCD screen for labeling, status and configuration information
- Power and Network status indicators
- Power over Ethernet (PoE) or external DC power supply
- Configurable using Net3 Concert software or directly from ACN

ORDERING INFORMATION

Net3 Two-Port Gateways

MODEL	DESCRIPTION
N32G-2F	Two-Port DMX/RDM Output Install Gateway
N3T2G-2F	Two-Port DMX/RDM Output Touring Gateway
N32G-2M	Two-Port DMX/RDM Input Install Gateway
N3T2G-2M	Two-Port DMX/RDM Input Touring Gateway
N32G-2T	Two-Port DMX/RDM Rear Terminal Install Gateway

Net3 Two-Port Gateway Accessories

MODEL	DESCRIPTION
N32G-BB	Surface-Mount Two-Gang Back Box
UBOLT	Touring Gateway U-Bolt Hardware Kit
400CC	Touring Gateway C-Clamp Hardware Kit
N3GA-PS	Net3 Gateway Universal Power Supply*

*N3GA-PS includes plugs for United States/Japan, Europe, Great Britain, and Australia/China. Used with Net3 Four-Port, Two-Port, Show Control and I/O Gateways.



SPECIFICATIONS

GENERAL

- Distributes DMX over Ethernet with any compatible input or output device
- RoHS Compliant (lead-free)
- CE compliant and ETL LISTED

FUNCTIONAL

- Supports Net3/ACN (ANSI E1.31 and E1.17)
- Supports RDM (ANSI E1.20)
- Supports USITT DMX512-A (ANSI E1.11)
- USITT DMX512 and ANSI E1.11 DMX512-A compliant
- Compliant with IEEE 802.3i for 10BASE-T, 802.3u for 100BASE-TX and 802.3af for Power over Ethernet
- Advanced Input Patch (AIP) allows any incoming address to be associated with any sACN address
- Flexible Output Patch (FOP) allows a 512 address universe to begin at any output address
- Support for per-address or per-universe level priority

MECHANICAL

- Fabricated from 16-gauge cold-rolled steel
- Black, fine-textured, scratch-resistant, powder-coat finish
- Two integrated DMX Input or Output ports
- Menu button for backlight/paging control
- Backlit LCD display for identification and status reporting:
 - Gateway identification
 - Network configuration
 - DMX port configuration
 - DMX port status
 - RDM configuration
- Front and rear power and data indicators
 - Blue power indicators
 - Green network activity indicator
- RJ45 for connection to lighting network
- Reset button for hard reset or forced reboot
- Flush-mount using standard two-gang back box (Raco 691 with half-inch-minimum mud ring or Raco 696 deep box)
- Surface-mount back boxes available from ETC (4105A2002)
- Hanging bracket and connectorized back box included with Touring version (C-clamp and U-Bolt hardware available)

PROCESSOR

- Maximum delay time from input to output not greater than one packet time
- Selectable DMX refresh rate with a maximum at least 40Hz

ENVIRONMENTAL

- Ambient operating temperature: 0° to 40°C (32° to 104°F)
- Operating humidity: 5% - 95% non-condensing
- Storage temperature: -40° to 70°C (-40° to 158°F)

POWER

- Supports IEEE802.3af Power over Ethernet or optional 8-28Vdc external power supply
- Maximum power consumption: 5 watts

DMX PORTS

- Two integrated 5-pin XLR connectors
- Software-configurable for input or output
- Fully optically-isolated input from the Gateway electronics
- Withstands fault voltages of up to 250VAC
- Integrated DMX/RDM termination

SPECIFICATIONS

CONFIGURATION

- Net3 Mode configuration provided by Net3 Concert software or directly from ACN
 - Supports up to 512 DMX addresses per port
 - Supports up to 63,999 Streaming ACN universes
- Up to 1,024 channels of data input or output
- DMX data input or output configurable by user
- Multiple outputs of a single DMX universe (DMX splitter) from a single Gateway
- Supports discrete DMX universe outputs per port
- Multiple sources may be combined to the network with each source or address allowed an independent priority
- Individual port start address and offset
- User-configurable labeling

ADDITIONAL INFORMATION

DMX512

Often shortened to DMX (Digital Multiplex), this communication protocol is used mainly to control dimmers and multi-parameter fixtures. A universe of DMX is defined as 512 channels. DMX sends a nearly continuous stream of level information for each control channel. It is a form of RS-485 digital serial communication.

RDM

Remote Device Management (ANSI E1.20) is a protocol enhancement to DMX512 that allows low-speed bidirectional communication between a system controller and attached RDM devices over a standard DMX line. This protocol will allow remote configuration, status monitoring, and management of devices.

sACN

Streaming ACN (ANSI E1.31), sends DMX-style control over TCP/IP networks. It provides a fast and efficient mechanism to transport the well-understood DMX protocol over Ethernet using an industry-standard protocol.


ACN

Architecture for Control Networks (ANSI E1.17) is a standard for high-speed bidirectional communication over TCP/IP on Ethernet network infrastructure. ACN is an open suite of protocols used between network devices for the purposes of greater and more adaptive control.

NET3

ETC's enhanced implementation of the standard ACN Protocol Suite (ANSI E1.17 and E1.31) including additional communication protocols for specialized applications and support of legacy systems.

TYPICAL SYSTEM RISER

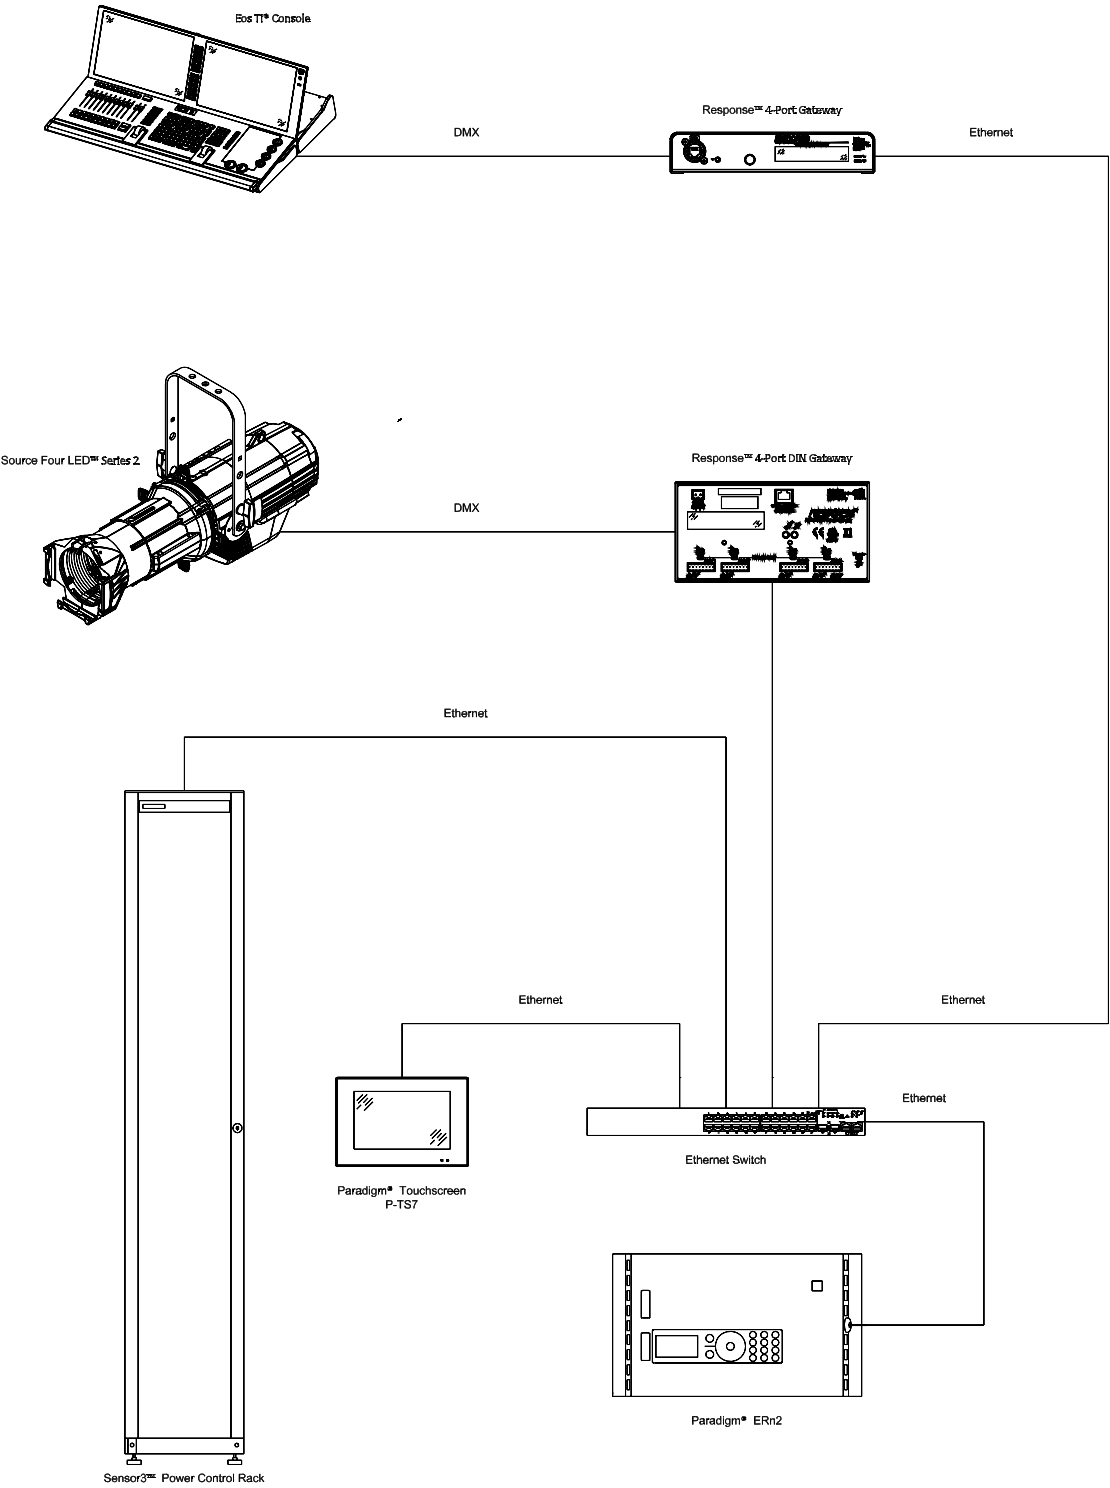


PHYSICAL


Net3 Two-Port Gateway Dimensions

MODEL	HEIGHT		WIDTH		DEPTH	
	inches	mm	inches	mm	inches	mm
N32G-2F / 2M	4.85	123	4.88	124	5.41	137
N3T2G-2F / 2M	6.47	165	4.88	124	5.41	137

Install gateway (Front/Side View)

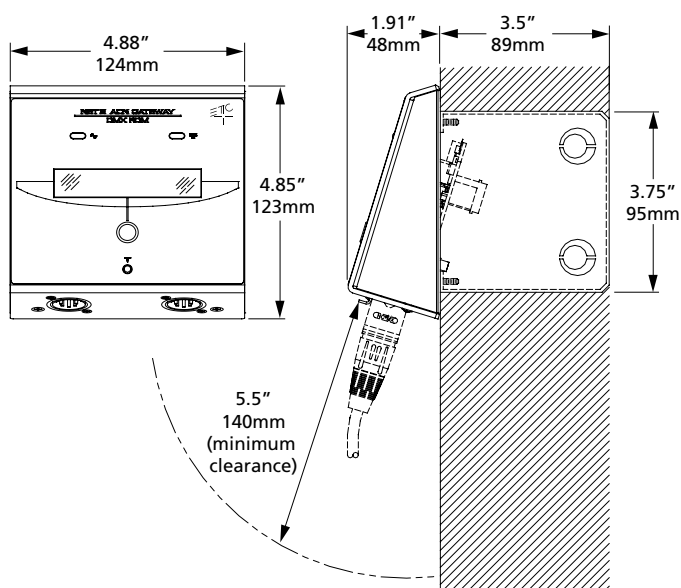


Touring Bracket (Top View)

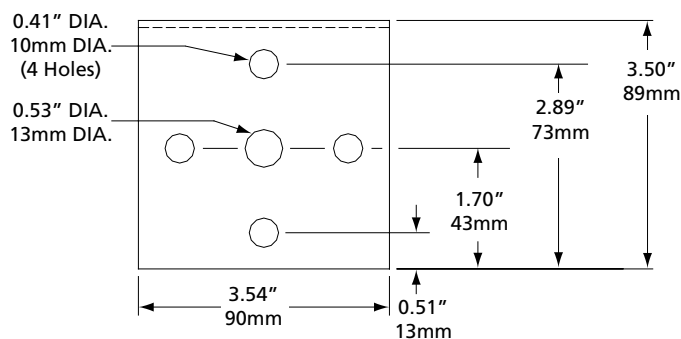

Net3 Two-Port Gateway Weights

MODEL	WEIGHT		SHIPPING WEIGHT	
	lbs	kgs	lbs	kgs
N32G-2F / 2M	2.0	1.0	4.5	2.0
N3T2G-2F / 2M	3.9	1.8	4.8	2.2

Touring gateway (Front/Side View)

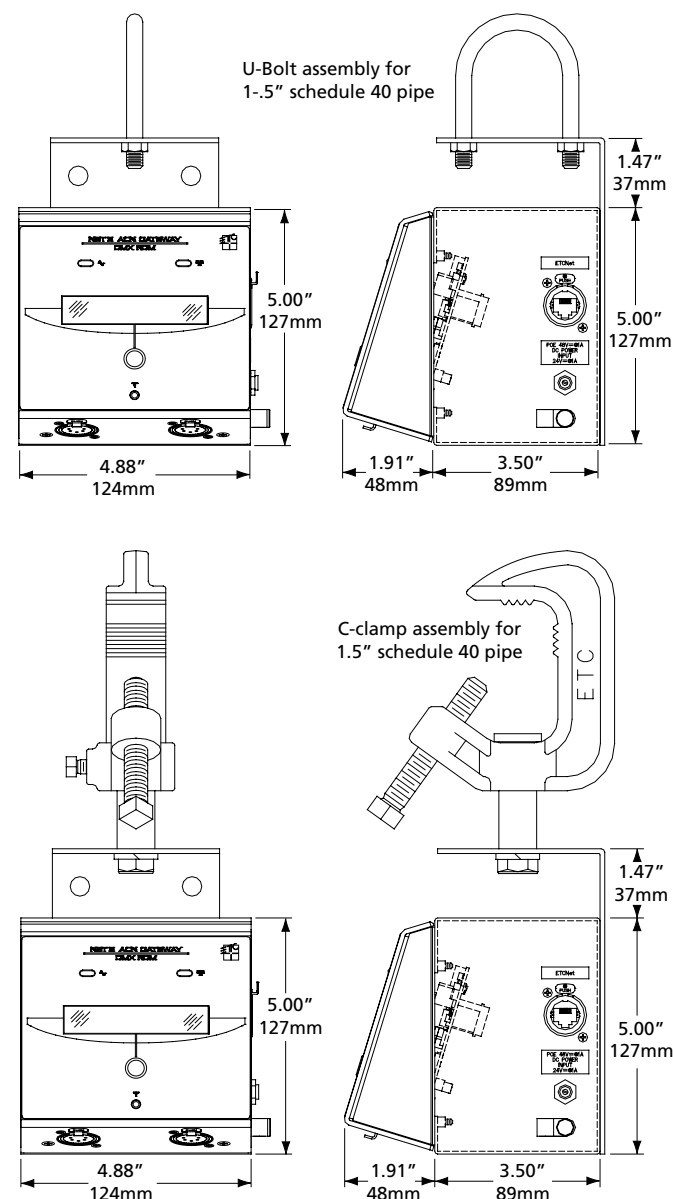

Corporate Headquarters • 3031 Pleasant View Rd, PO Box 620979, Middleton WI 53562 0979 USA • +1 608 831 4116

London, UK • Unit 26-28, Victoria Industrial Estate, Victoria Road, London W3 6UU, UK • +44 (0) 20 8896 1000

Rome, IT • Via Pieve Torina, 48, 00156 Rome, Italy • +39 (06) 32 111 683

Holzkirchen, DE • Ohmstrasse 3, 83607 Holzkirchen, Germany • +49 (80 24) 47 00-0

Hong Kong • Room 1801, 18/F, Tower 1 Phase 1, Enterprise Square, 9 Sheung Yuet Road, Kowloon Bay, Kowloon, Hong Kong • +852 2799 1220

Web • etconnect.com • Copyright©2018 ETC. All Rights Reserved. All product information and specifications subject to change. 4261L1001 Rev G 01/18