1 Definitions

1.1 Misc

Let $m = \left\lceil \left(\frac{N}{102}\right)^{\frac{1}{d}} \right\rceil$, base of the counter

$MSR =$ most signifcant digit region

$\mathcal{C}_0 =$ starting value of counter

$d = \lceil \log_m \mathcal{C}_0 \rceil = \left\lfloor \frac{k}{2} \right\rfloor$, number of digits per row

$\mathcal{C}_f = m^d$, final value of the counter

$\mathcal{C}_\Delta = \mathcal{C}_f - \mathcal{C}_0$, number of rows/ times to count

$l = \lceil \log m \rceil + 2$, bits needed to encode each digit in binary, plus 2 for MSR and MSD

1.2 Determining the starting value $\mathcal{C}_0$

...therefore, let $d = \left\lfloor \frac{k}{2} \right\rfloor$, $m = \left\lceil \left(\frac{N}{102}\right)^{\frac{1}{d}} \right\rceil$, $l = \lceil \log m \rceil + 2$, $\mathcal{C}_0 = m^d - \left\lfloor \frac{N-12l-76}{12l+90} \right\rfloor$, where d is the number of digits per row of the counter, m is the base of the counter, l is the number of bits needed to encode each digit in binary plus 2 for indicating whether a digit is in the MSR and is the MSD in that region, and $\mathcal{C}_0$ is the start of the counter in decimal.

In general, the height of a digit region is $12l + 90$. There are two cases when the height is different, namely in the first and last digit regions, where the height is $12l+91$ and $12l+75$, respectively. Let h be the height of the construction before any filler/roof tiles are added. If we define $\mathcal{C}_\Delta$ as the number of `Counter` unit rows, then $h = (\mathcal{C}_\Delta - 1)(12l + 90) + (12l + 91) + (12l + 75)$, simplifying to $\mathcal{C}_\Delta(12l + 90) + 12l + 76$. So then the maximum height of the counter is $m^d(12l + 90) + 12l + 76$. Since our goal is to end with a rectangle of height N, we need to pick a base such that the counter can increment so many times that when it stops, it is at least N.

Lemma 1. $N \le m^d(12l + 90) + 12l + 76$.

Proof.

$$N = 102 \left(\frac{N}{102}\right) = 102 \left(\left(\frac{N}{102}\right)^{\frac{1}{d}}\right)^d \le 102 \left\lceil \left(\frac{N}{102}\right)^{\frac{1}{d}} \right\rceil^d$$

$$= 102m^d \le 12lm^d + 90m^d \le 12lm^d + 90m^d + 12l + 76$$

$$= m^d(12l + 90) + 12l + 76$$

$\square$

1.3 Filling in the gaps

...this means that the number of `Counter` unit rows $\mathcal{C}_\Delta$ is $m^d - \mathcal{C}_0$, where we have defined $\mathcal{C}_0$ as the starting value of the counter. To choose the best starting value, we find the value for $\mathcal{C}_\Delta$ that gets h as close to N without exceeding N. It follows from the equation $h = \mathcal{C}_\Delta(12l + 90) + 12l + 76$, that $\mathcal{C}_\Delta = \left\lfloor \frac{N-12l-76}{12l+90} \right\rfloor$. Thus, $\mathcal{C}_0 = m^d - \left\lfloor \frac{N-12l-76}{12l+90} \right\rfloor$. As a result of each digit requiring a width of 2 tiles, if k is odd, one additional tile column must be added. The number of filler tiles needed for the width is $k \mod 2$, and the number of filler tiles for the height is $N - 12l - 76 \mod 12l + 90$.

2   General counter

(a) A "clean" counter row, before any reading has started.

(b) Read digit 1 in the current row, write digit 1 in the next row.

(c) Read digit 2 in the current row, write digit 2 in the next row.

(d) Read digit 3 in the current row, write digit 3 in the next row.

Figure 1:   This illustrates how a counter reads and writes a digit region, in a general sense. The counter starts in the rightmost digit region by reading the bottommost digit within that region. After reading digit 1 in the current row, the corresponding digit region in the next row be started in the next row. The counter writes the first digit in the next row, and then returns to the second digit in the current digit region. Once all the digits in the current digit region are read and written into the next row, the counter can then do one of the following: continue reading digits by moving on to the next digit region, cross back all the way to the right of the rectangle and start reading the next row, or halt.

2.1   Digit region explanation (in progress)

Each logical row of the counter is made up of $\left\lceil \frac{d}{3} \right\rceil$ "digit regions". A digit region is a group of 1-3 digits, stacked vertically on top of one another. Within a digit region, the digits are sorted in order of significance, thus the top digit is the most signifcant digit, the middle digit is second most significant and the bottommost digit is the least signifcant.

The leftmost digit region is most signifcant and the rightmost is the least signifcant. The counter reads the least signifcant digit (1) in digit region 1, and continues in the current row until it detects the final digit, in the most signifcant digit region (MSR).

(a) Digits in a typical counter

(b) Digits in two digit regions, stacked vertically, minimizing the width.

Contrary to a typical counter, each counter row has an approximate height of 3 digits $\approx 12l$. The digits are stacked up to 3 before increasing the width.

2.2 Detecting the edges

The counter must detect if a digit is in the MSR and if it's in the MSR, whether or not it is the most signifcant digit. To do this, all digits are encoded with two additional bits on the least signifcant end. If bit 0 is 1, the reader tiles know they could be reading the most signifcant digit (MSD) or in case 2, the second most signifcant digit. If bit 1 is 1, the digit currently being read is the MSD, otherwise the digit is digit 1 in case 2.

bit_1	bit_0	Meaning
0	0	digit is not in MSR
0	1	digit is in the MSR but is not the MSD
1	0	
1	1	digit is in the MSR and is MSD

3 Gadgets

When describing a special case, i.e. "digit x – case y", whatever follows will only apply to the MSR (due to each case only affecting the MSR.)

3.1 Counter Unit

3.1.1 Digit readers

- For each $i = 1, 2, 3$ and each $op \in \{\texttt{increment}, \texttt{copy}\}$

  - if $j = 0$: Create $\texttt{Digit\_Reader}(\langle \texttt{DigitReader}, i, \lambda, \texttt{op} \rangle,$
  $\langle \texttt{DigitReader}, i, 0, \texttt{op} \rangle,$
  $\langle \texttt{DigitReader}, i, 1, \texttt{op} \rangle)$
  from the general gadget in Figure 3

- if $1 \leqslant j \leqslant l - 2$: Create `Digit_Reader`($\langle \texttt{DigitReader}, i, u, \texttt{op} \rangle$,

$\qquad\qquad\qquad\qquad\qquad\qquad \langle \texttt{DigitReader}, i, 0u, \texttt{op} \rangle$,

$\qquad\qquad\qquad\qquad\qquad\qquad \langle \texttt{DigitReader}, i, 1u, \texttt{op} \rangle$)

from the general gadget in Figure 3

- if $j = l - 1$: Create `Digit_Reader`($\langle \texttt{DigitReader}, i, u, \texttt{op} \rangle$,

$\qquad\qquad\qquad\qquad\qquad \langle \texttt{PreWarp}, i, 0u, \texttt{op} \rangle$,

$\qquad\qquad\qquad\qquad\qquad \langle \texttt{PreWarp}, i, 1u, \texttt{op} \rangle$)

from the general gadget in Figure 3

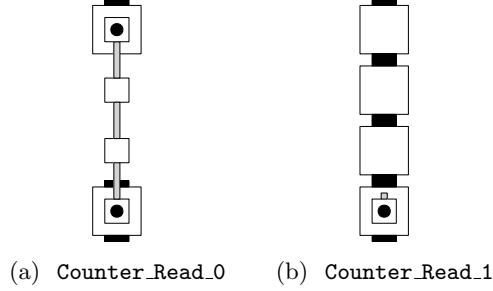(a) `Counter_Read_0`   (b) `Counter_Read_1`

Figure 3: `Counter_Read`

3.1.2   Warping

For each $i = 1, 2, 3$, $u \in \{0, 1\}^l$, and each $\texttt{op} \in \{\texttt{increment}, \texttt{copy}\}$

- `Pre_Warp`

  - if u ends with 00: Create `Pre_Warp`($\langle \texttt{PreWarp}, i, u, \texttt{op} \rangle$, $\langle \texttt{FirstWarp}, i, u, \texttt{op} \rangle$)
    from the general gadget in Figure 4a

  - if u ends with 01: Create `Pre_Warp`($\langle \texttt{PreWarp}, i, u, \texttt{op} \rangle$, $\langle \texttt{FirstWarp}, i, u, \texttt{op}, \texttt{msr} \rangle$)
    from the general gadget in Figure 4c

  - if u ends with 11: Create `Pre_Warp`($\langle \texttt{PreWarp}, i, u, \texttt{op} \rangle$, $\langle \texttt{FirstWarp}, i, u, \texttt{op}, \texttt{msr}, \texttt{msd} \rangle$)
    Depending on the number of digits in the MSR, the gadget created in this step will differ. If i is 1 (case 1) use the general gadget in Figure 4b. If i is 2 (case 2) use the general gadget in Figure 4d. If i is 3 (case 3) use the general gadget in Figure 4a.

4

(a) General   (b) Digit 1 – Case 1   (c) Digit 1 – Case 2   (d) Digit 2 – Case 2
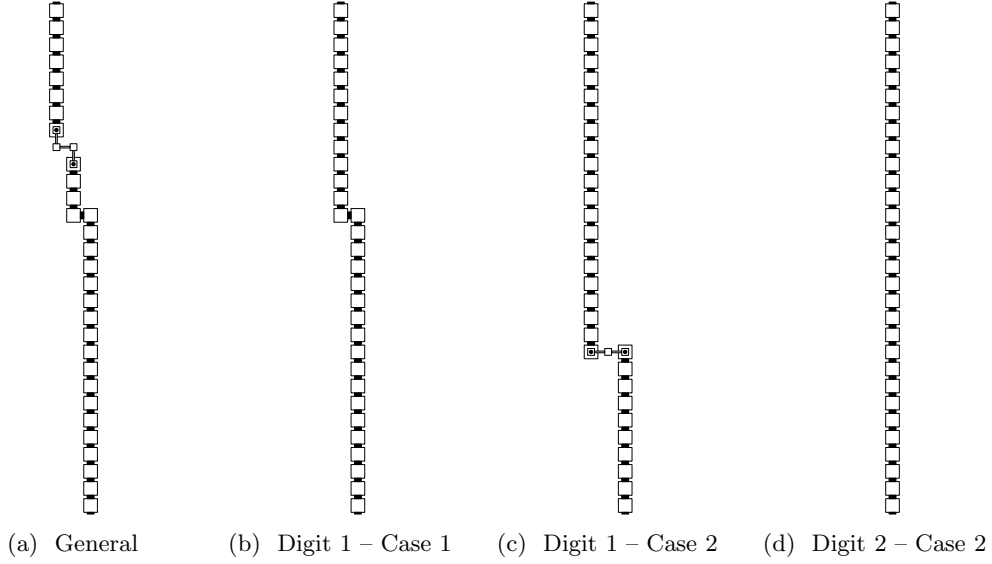
Figure 4: Pre_Warp gadgets

- First_Warp: A First_Warp connects to a Warp_Bridge gadget in all cases except when it's assembling in the MSR and it is digit 1 in case 1 or 2, in which the First_Warp gadget attaches directly to a Post_Warp.

  - Create First_Warp($\langle \text{FirstWarp}, i, u, \text{op} \rangle$,

    $\langle \text{FirstWarp}, i, u, \text{op} \rangle$,

    $\langle \text{WarpBridge}, i, u, \text{op} \rangle$)

  - (digit 1, case 2): Create First_Warp($\langle \text{FirstWarp}, i, u, \text{op}, \text{msr} \rangle$,

    $\langle \text{FirstWarp}, i, u, \text{op}, \text{msr} \rangle$,

    $\langle \text{PostWarp}, i, u, \text{op}, \text{msr} \rangle$)

  - (digit 1, case 1): Create First_Warp($\langle \text{FirstWarp}, i, u, \text{op}, \text{msr}, \text{msd} \rangle$,

    $\langle \text{FirstWarp}, i, u, \text{op}, \text{msr}, \text{msd} \rangle$,

    $\langle \text{PostWarp}, i, u, \text{op}, \text{msr}, \text{msd} \rangle$)

  - (digit 2, case 2): Create First_Warp($\langle \text{FirstWarp}, i, u, \text{op}, \text{msr}, \text{msd} \rangle$,

    $\langle \text{FirstWarp}, i, u, \text{op}, \text{msr}, \text{msd} \rangle$,

    $\langle \text{WarpBridge}, i, u, \text{op}, \text{msr}, \text{msd} \rangle$)

  - (digit 3, case 3): Create First_Warp($\langle \text{FirstWarp}, i, u, \text{op}, \text{msr}, \text{msd} \rangle$,

    $\langle \text{FirstWarp}, i, u, \text{op}, \text{msr}, \text{msd} \rangle$,

    $\langle \text{WarpBridge}, i, u, \text{op}, \text{msr}, \text{msd} \rangle$)

5

- Warp_Bridge: a Warp_Bridge gadget binds the last tile of the First_Warp gadgets to the first tile of the Second_Warp gadgets. For digit 1 in cases 1 and 2, the Warp_Bridge is omitted from the Warp_Unit.

  - if u ends with 00:
    Create Warp_Bridge($\langle \texttt{WarpBridge}, i, u, \texttt{op} \rangle$, $\langle \texttt{SecondWarp}, i, u, \texttt{op} \rangle$)
    from the general gadget in Figure 5a

  - if u ends with 11 and i is 2:
    Create Warp_Bridge($\langle \texttt{WarpBridge}, i, u, \texttt{op}, \texttt{msr}, \texttt{msd} \rangle$, $\langle \texttt{SecondWarp}, i, u, \texttt{op}, \texttt{msr}, \texttt{msd} \rangle$)
    from the general gadget in Figure 5b

  - if u ends with 11 and i is 3:
    Create Warp_Bridge($\langle \texttt{WarpBridge}, i, u, \texttt{op}, \texttt{msr}, \texttt{msd} \rangle$, $\langle \texttt{SecondWarp}, i, u, \texttt{op}, \texttt{msr}, \texttt{msd} \rangle$)
    from the general gadget in Figure 5a

(a) General   (b) Digit 2 – Case 2
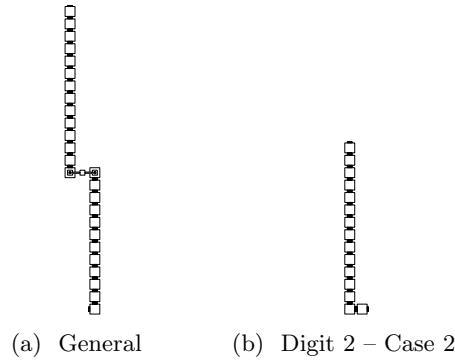
Figure 5: Warp_Bridge gadgets

- Second_Warp:

  - Create Second_Warp($\langle \texttt{SecondWarp}, i, u, \texttt{op} \rangle$,
                          $\langle \texttt{SecondWarp}, i, u, \texttt{op} \rangle$,
                          $\langle \texttt{PostWarp}, i, u, \texttt{op} \rangle$)

  - Create Second_Warp($\langle \texttt{SecondWarp}, i, u, \texttt{op}, \texttt{msr} \rangle$,
                          $\langle \texttt{SecondWarp}, i, u, \texttt{op}, \texttt{msr} \rangle$,
                          $\langle \texttt{PostWarp}, i, u, \texttt{op}, \texttt{msr} \rangle$)

  - Create Second_Warp($\langle \texttt{SecondWarp}, i, u, \texttt{op}, \texttt{msr}, \texttt{msd} \rangle$,
                          $\langle \texttt{SecondWarp}, i, u, \texttt{op}, \texttt{msr}, \texttt{msd} \rangle$,
                          $\langle \texttt{PostWarp}, i, u, \texttt{op}, \texttt{msr}, \texttt{msd} \rangle$)

- Post_Warp:

- if u ends with 00:
  Create $\texttt{Post\_Warp}(\langle \texttt{PostWarp}, i, u, \texttt{op} \rangle, \langle \texttt{DigitWriter}, i, u, \texttt{op} \rangle)$
  Depending on i the gadget created in this step will differ: If i is 1 use from the general gadget in Figure 6a otherwise (i is 2 or 3) use from the general gadget in Figure 6b.

- if u ends with 01:
  Create $\texttt{Post\_Warp}(\langle \texttt{PostWarp}, i, u, \texttt{op}, \texttt{msr} \rangle, \langle \texttt{DigitWriter}, i, u, \texttt{op}, \texttt{msr} \rangle)$
  from the general gadget in Figure 6d.

- if u ends with 11:
  Create $\texttt{Post\_Warp}(\langle \texttt{PostWarp}, i, u, \texttt{op}, \texttt{msr}, \texttt{msd} \rangle, \langle \texttt{DigitWriter}, i, u, \texttt{op}, \texttt{msr}, \texttt{msd} \rangle)$
  Depending on the number of digits in the MSR, the gadget created in this step will differ. If i is 1 (case 1) use the general gadget in Figure 6c. If i is 2 (case 2) use the general gadget in Figure 6e. If i is 3 (case 3) use the general gadget in Figure 6b.
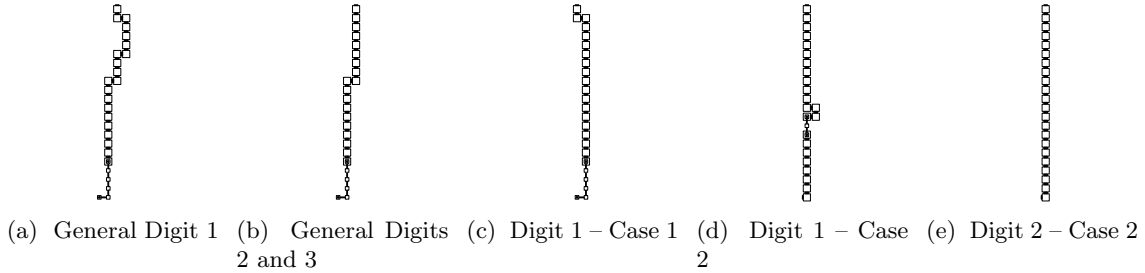

(a) General Digit 1 (b) General Digits 2 and 3 (c) Digit 1 – Case 1 (d) Digit 1 – Case 2 (e) Digit 2 – Case 2

Figure 6: $\texttt{Post\_Warp}$ gadgets

3.1.3 Digit writers

- For each $i = 1, 2, 3$, $j = l-1, \ldots, 1$, $u \in \{0,1\}^j$, and $\texttt{op} \in \{\texttt{increment}, \texttt{copy}\}$:

  - Create $\texttt{Digit\_Writer}(\langle \texttt{DigitWriter}, i, u0, \texttt{op} \rangle, \langle \texttt{DigitWriter}, i, u, \texttt{op} \rangle)$
    from the general gadget in Figure 7a
  - Create $\texttt{Digit\_Writer}(\langle \texttt{DigitWriter}, i, u1, \texttt{op} \rangle, \langle \texttt{DigitWriter}, i, u, \texttt{op} \rangle)$
    from the general gadget in Figure 7b
  - Create $\texttt{Digit\_Writer}(\langle \texttt{DigitWriter}, i, u0, \texttt{op}, \texttt{msr} \rangle, \langle \texttt{DigitWriter}, i, u, \texttt{op}, \texttt{msr} \rangle)$
    from the general gadget in Figure 7a
  - Create $\texttt{Digit\_Writer}(\langle \texttt{DigitWriter}, i, u1, \texttt{op}, \texttt{msr} \rangle, \langle \texttt{DigitWriter}, i, u, \texttt{op}, \texttt{msr} \rangle)$
    from the general gadget in Figure 7b
  - Create $\texttt{Digit\_Writer}(\langle \texttt{DigitWriter}, i, u0, \texttt{op}, \texttt{msr}, \texttt{msd} \rangle, \langle \texttt{DigitWriter}, i, u, \texttt{op}, \texttt{msr}, \texttt{msd} \rangle)$
    from the general gadget in Figure 7a
  - Create $\texttt{Digit\_Writer}(\langle \texttt{DigitWriter}, i, u1, \texttt{op}, \texttt{msr}, \texttt{msd} \rangle, \langle \texttt{DigitWriter}, i, u, \texttt{op}, \texttt{msr}, \texttt{msd} \rangle)$
    from the general gadget in Figure 7b

- For each $i = 1, 2, 3$ and each $\texttt{op} \in \{\texttt{increment}, \texttt{copy}\}$:

  - Create $\texttt{Digit\_Writer}(\langle \texttt{DigitWriter}, i, 0, \texttt{op} \rangle, \langle \texttt{DigitTop}, i, \texttt{op} \rangle)$
    from the general gadget in Figure 7a

7

- Create Digit_Writer($\langle$ DigitWriter, $i, 1,$ op $\rangle$, $\langle$ DigitTop, $i,$ op $\rangle$)
  from the general gadget in Figure 7b

- Create Digit_Writer($\langle$ DigitWriter, $i, 0,$ op, msr $\rangle$, $\langle$ DigitTop, $i,$ op, msr $\rangle$)
  from the general gadget in Figure 7a

- Create Digit_Writer($\langle$ DigitWriter, $i, 1,$ op, msr $\rangle$, $\langle$ DigitTop, $i,$ op, msr $\rangle$)
  from the general gadget in Figure 7b

- Create Digit_Writer($\langle$ DigitWriter, $i, 0,$ op, msr, msd $\rangle$, $\langle$ DigitTop, $i,$ op, msr, msd $\rangle$)
  from the general gadget in Figure 7a

- Create Digit_Writer($\langle$ DigitWriter, $i, 1,$ op, msr, msd $\rangle$, $\langle$ DigitTop, $i,$ op, msr, msd $\rangle$)
  from the general gadget in Figure 7b

(a) Digit_Write_0   (b) Digit_Write_1
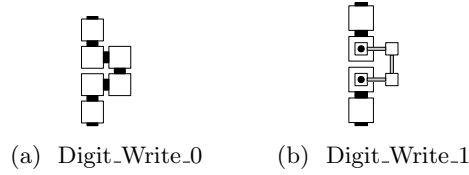
Figure 7: Digit_Write gadgets

3.1.4 Digit tops

The Digit_Top gadgets have specific geometry, such that they allow First_Warp and Second_Warp units to "wake up" and end their warp journey. A Digit_Top is placed on the north end of a digit. These hold a increment/copy signal and the regional index of the next digit to read.

- For each $i = 1, 2, 3$ and each op $\in \{$increment, copy$\}$

  - if i is 3:
    Create Digit_Top_Case3($\langle$ DigitTop, $i,$ op, msr, msd $\rangle$, $\langle$ ReturnD3ReadNextRow, op $\rangle$)
    from the general gadget in Figure 8a

    Create Digit_Top($\langle$ DigitTopDigit3, op $\rangle$, $\langle$ ReturnD3ReadD1, op $\rangle$)
    from the general gadget in Figure 8a

  - if i is 2:
    Create Digit_Top_Digit2_Case2($\langle$ DigitTop, $i,$ op, msr, msd $\rangle$, $\langle$ ReturnD2ReadNextRow, op $\rangle$)
    from the general gadget in Figure 8b

    Create Digit_Top($\langle$ DigitTopDigit2, op $\rangle$, $\langle$ ReturnD2ReadD3, op $\rangle$)
    from the general gadget in Figure 8a

  - if i is 1:
    Create Digit_Top_Digit1_Case1($\langle$ DigitTop, $i,$ op, msr, msd $\rangle$, $\langle$ ReturnD1ReadNextRow, op $\rangle$)
    from the general gadget in Figure 8c

    Create Digit_Top_Digit1_Case2($\langle$ DigitTop, $i,$ op, msr $\rangle$, $\langle$ ReturnD1ReadD2 $-$ Case2, op $\rangle$)
    from the general gadget in Figure 8d

Create Digit_Top(⟨DigitTopDigit1, op⟩ , ⟨ReturnD1ReadD2, op⟩)
from the general gadget in Figure 8a

(a) General   (b) Digit 2 – Case 2   (c) Digit 1 – Case 1   (d) Digit 1 – Case 2
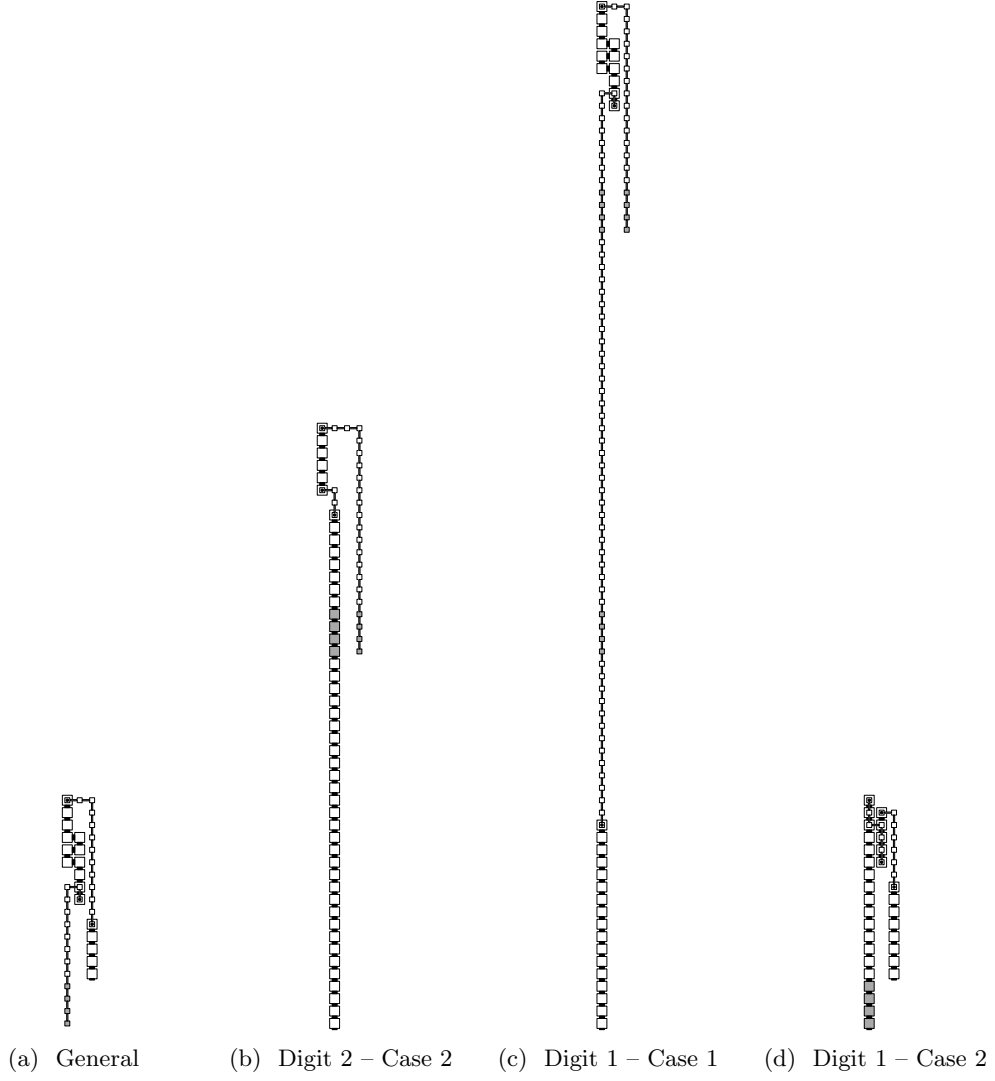
Figure 8: Digit_Top gadgets

3.1.5   Return paths between digits in the same row

The gadgets of this class hold a increment/copy signal and the regional index of the next digit to read. The height of these gadgets is dependent on l. These gadgets are used so that upon writing a digit, the counter is able to move back down to the next digit in the current row, and continue reading.

(a) Return digit 1 read digit 2 (b) Return digit 1 read digit 2 – Case 2 (c) Return digit 2 read digit 3 (d) Return digit 3 read digit 1
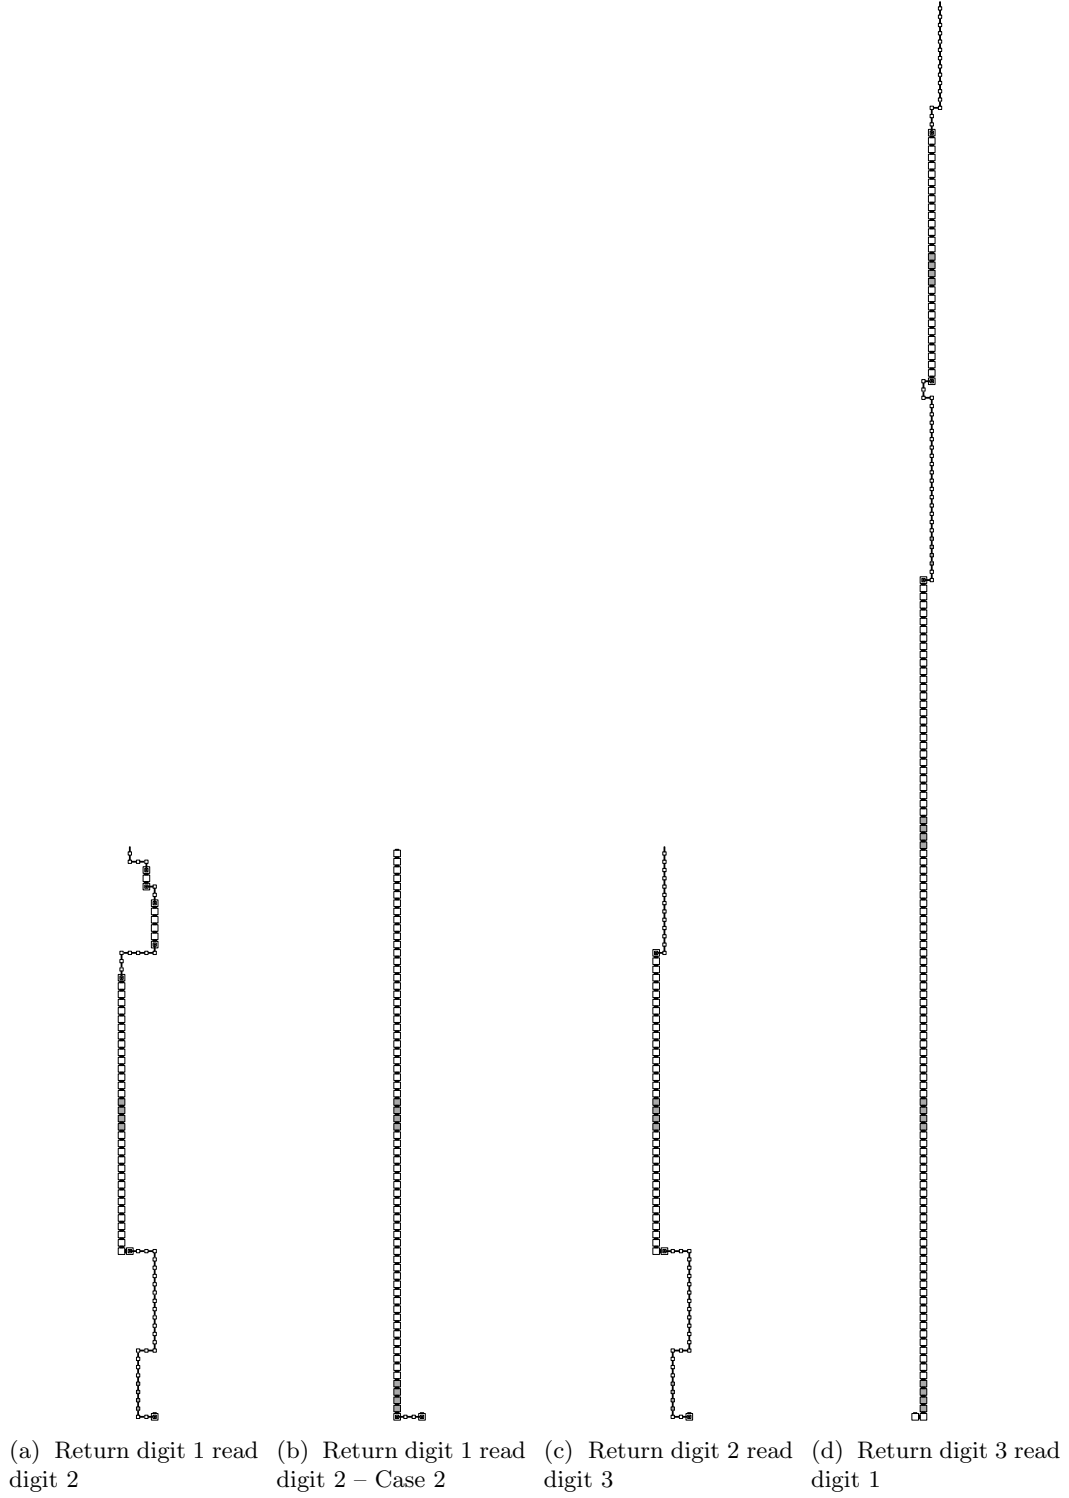
Figure 9: All of these gadgets grow from north to south, the height of gray tiles depends on l.

For each $\mathrm{op} \in \{\mathtt{increment}, \mathtt{copy}\}$.

- Create `Return_From_Digit1_Read_Digit2`($\langle \texttt{ReturnD1ReadD2, op} \rangle$,
$\qquad\qquad\qquad\qquad\qquad\qquad$ $\langle \texttt{DigitReader}, 2, \lambda, \texttt{op} \rangle$)

- Create `Return_From_Digit1_Read_Digit2_Case2`($\langle \texttt{ReturnD1ReadD2} - \texttt{Case2, op} \rangle$,
$\qquad\qquad\qquad\qquad\qquad\qquad\qquad$ $\langle \texttt{DigitReader}, 2, \lambda, \texttt{op} \rangle$)

- Create `Return_From_Digit2_Read_Digit3`($\langle \texttt{ReturnD2ReadD3, op} \rangle$,
$\qquad\qquad\qquad\qquad\qquad\qquad$ $\langle \texttt{DigitReader}, 3, \lambda, \texttt{op} \rangle$)

- Create `Return_From_Digit3_Read_Digit1`($\langle \texttt{ReturnD3ReadD1, op} \rangle$,
$\qquad\qquad\qquad\qquad\qquad\qquad$ $\langle \texttt{DigitReader}, 1, \lambda, \texttt{op} \rangle$)

3.1.6 Return paths between the MSD and LSD in different rows

The gadgets of this class hold a increment/copy signal. The height of these gadgets is dependent on l and the width is dependent of k. These gadgets are used to begin reading the first digit in the following row, once the MSD has been read in the current row.

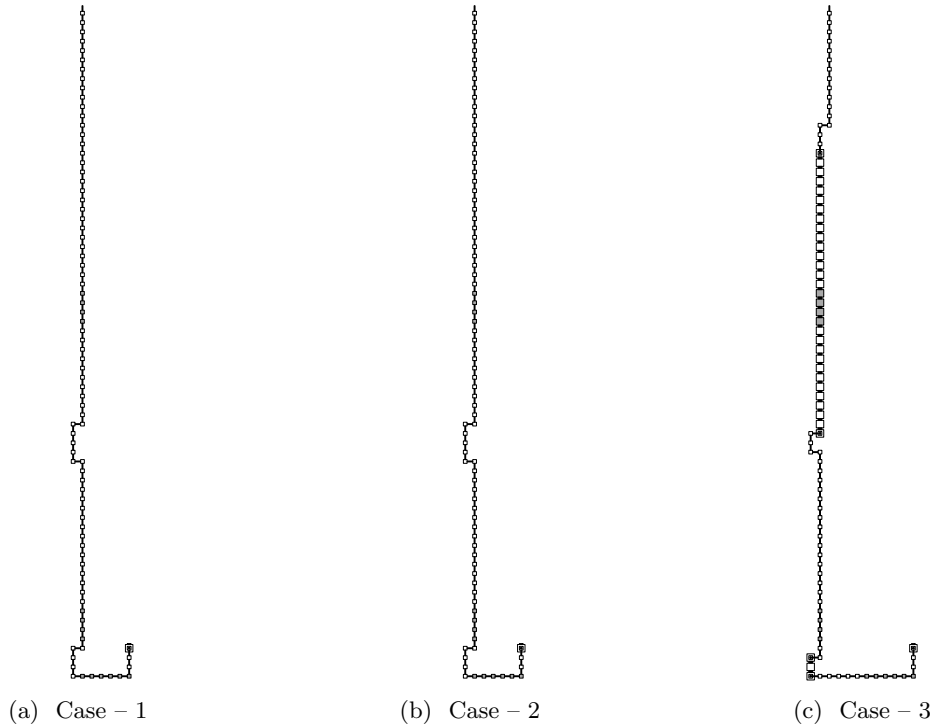(a) Case − 1 $\qquad\qquad\qquad\qquad$ (b) Case − 2 $\qquad\qquad\qquad\qquad$ (c) Case − 3

Figure 10: All of these gadgets assemble north to south. The vertical gray lines tiles have a height that depends on l and the horizontal gray lines depend on k. (cases 1 and 2 are geometrically equivalent)

For each $\texttt{op} \in \{\texttt{increment}, \texttt{copy}\}$

- Create `Return_From_Digit1_Read_Next_Row`($\langle \texttt{ReturnD1ReadNextRow, op} \rangle$,
$\qquad\qquad\qquad\qquad\qquad\qquad\qquad$ $\langle \texttt{DigitReader}, 1, \lambda, \texttt{op} \rangle$)

- Create `Return_From_Digit2_Read_Next_Row`($\langle$ReturnD2ReadNextRow, op$\rangle$,
  $\langle$DigitReader, 1, λ, op$\rangle$)

- Create `Return_From_Digit3_Read_Next_Row`($\langle$ReturnD3ReadNextRow, op$\rangle$,
 $\langle$DigitReader, 1, λ, op$\rangle$)

3.2 Seed Unit (updated to assemble in a more consistent fashion)

(a) Initial value case 3   (b) Initial value case 2   (c) Initial value case 1

3.3 Overviews

(a) Full overview case 3

(b) Full overview case 2

(c) Full overview case 1