

Electrolytic Capacitors

C6511 = Product group; Product group discount C 65 1_

F&T Electrolytic Capacitors

Soldering Lug, Stud Mounted
Style: Bulk

Rated Voltage: 40...100V DC

Tolerance: -10...+30%

Temperature Range: -40...+105°C

Series: LFB

Features

- Encasement and non-isolated stud on negative polarity

Technical Specifications

Part Nr.	C _N [μF]	U _N [V=]	tan δ [%]	I _R [A]	Z [mΩ]
LFB4700/63	4700	63	15	4,0	50
LFB10000/40	10000	40	20	4,5	40
LFB10000/63	10000	63	16	5,5	30
LFB10000/100	10000	100	15	5,4	40

C = Capacitance, U_N = DC Voltage Rating, tan δ = Dissipation Factor (100Hz, 20°C), I_R = Ripple Current (120Hz, 85°C), Z = Impedance Ratio (-25...+25°C, 100Hz)

Dimensions

Part Nr.	D [mm]	L [mm]	a [mm]
LFB4700/63	35	50	10
LFB10000/40	35	50	10
LFB10000/63	35	66	10
LFB10000/100	40	95	20

Norms

IEC 384-4, climatic class 40/105/56

Terms of Delivery


Minimum order quantity: 1 PKU = 5 pieces

LFB10000/100: 1 PKU = 1 piece

Manufacturer: 

<http://www.ftcap.de>

Part Nr.	Part description
LFB4700/63	El-Capacitor 4700uF/63V 35x50mm
LFB10000/40	El-Capacitor 10000uF/40V 35x50mm
LFB10000/63	El-Capacitor 10000uF/63V 35x66mm
LFB10000/100	El-Capacitor 10000uF/100V 40x95mm

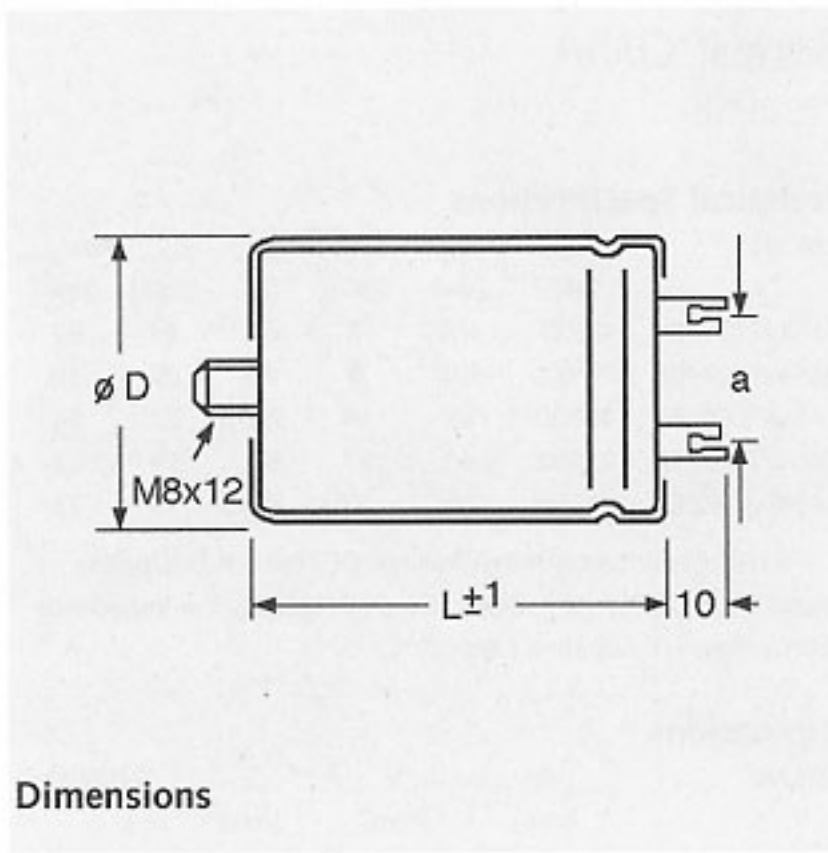

Dimensions