


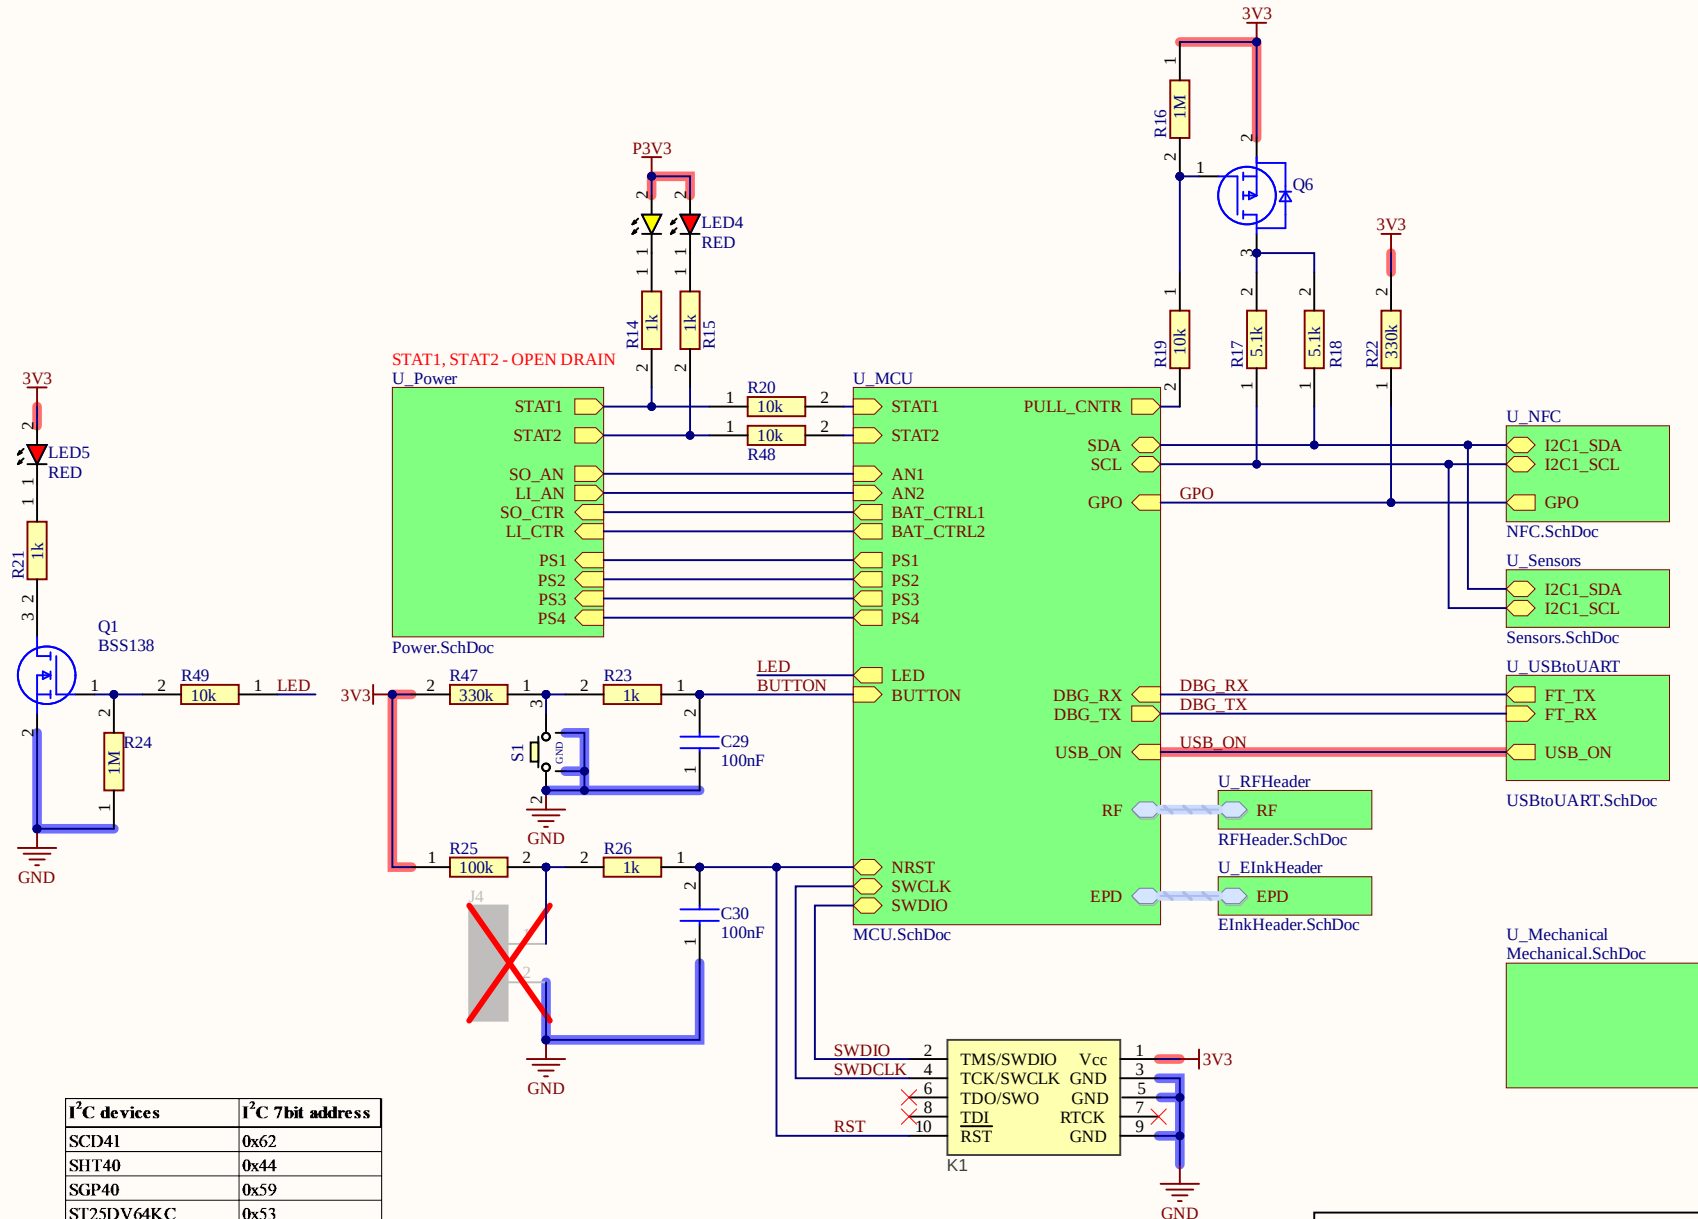


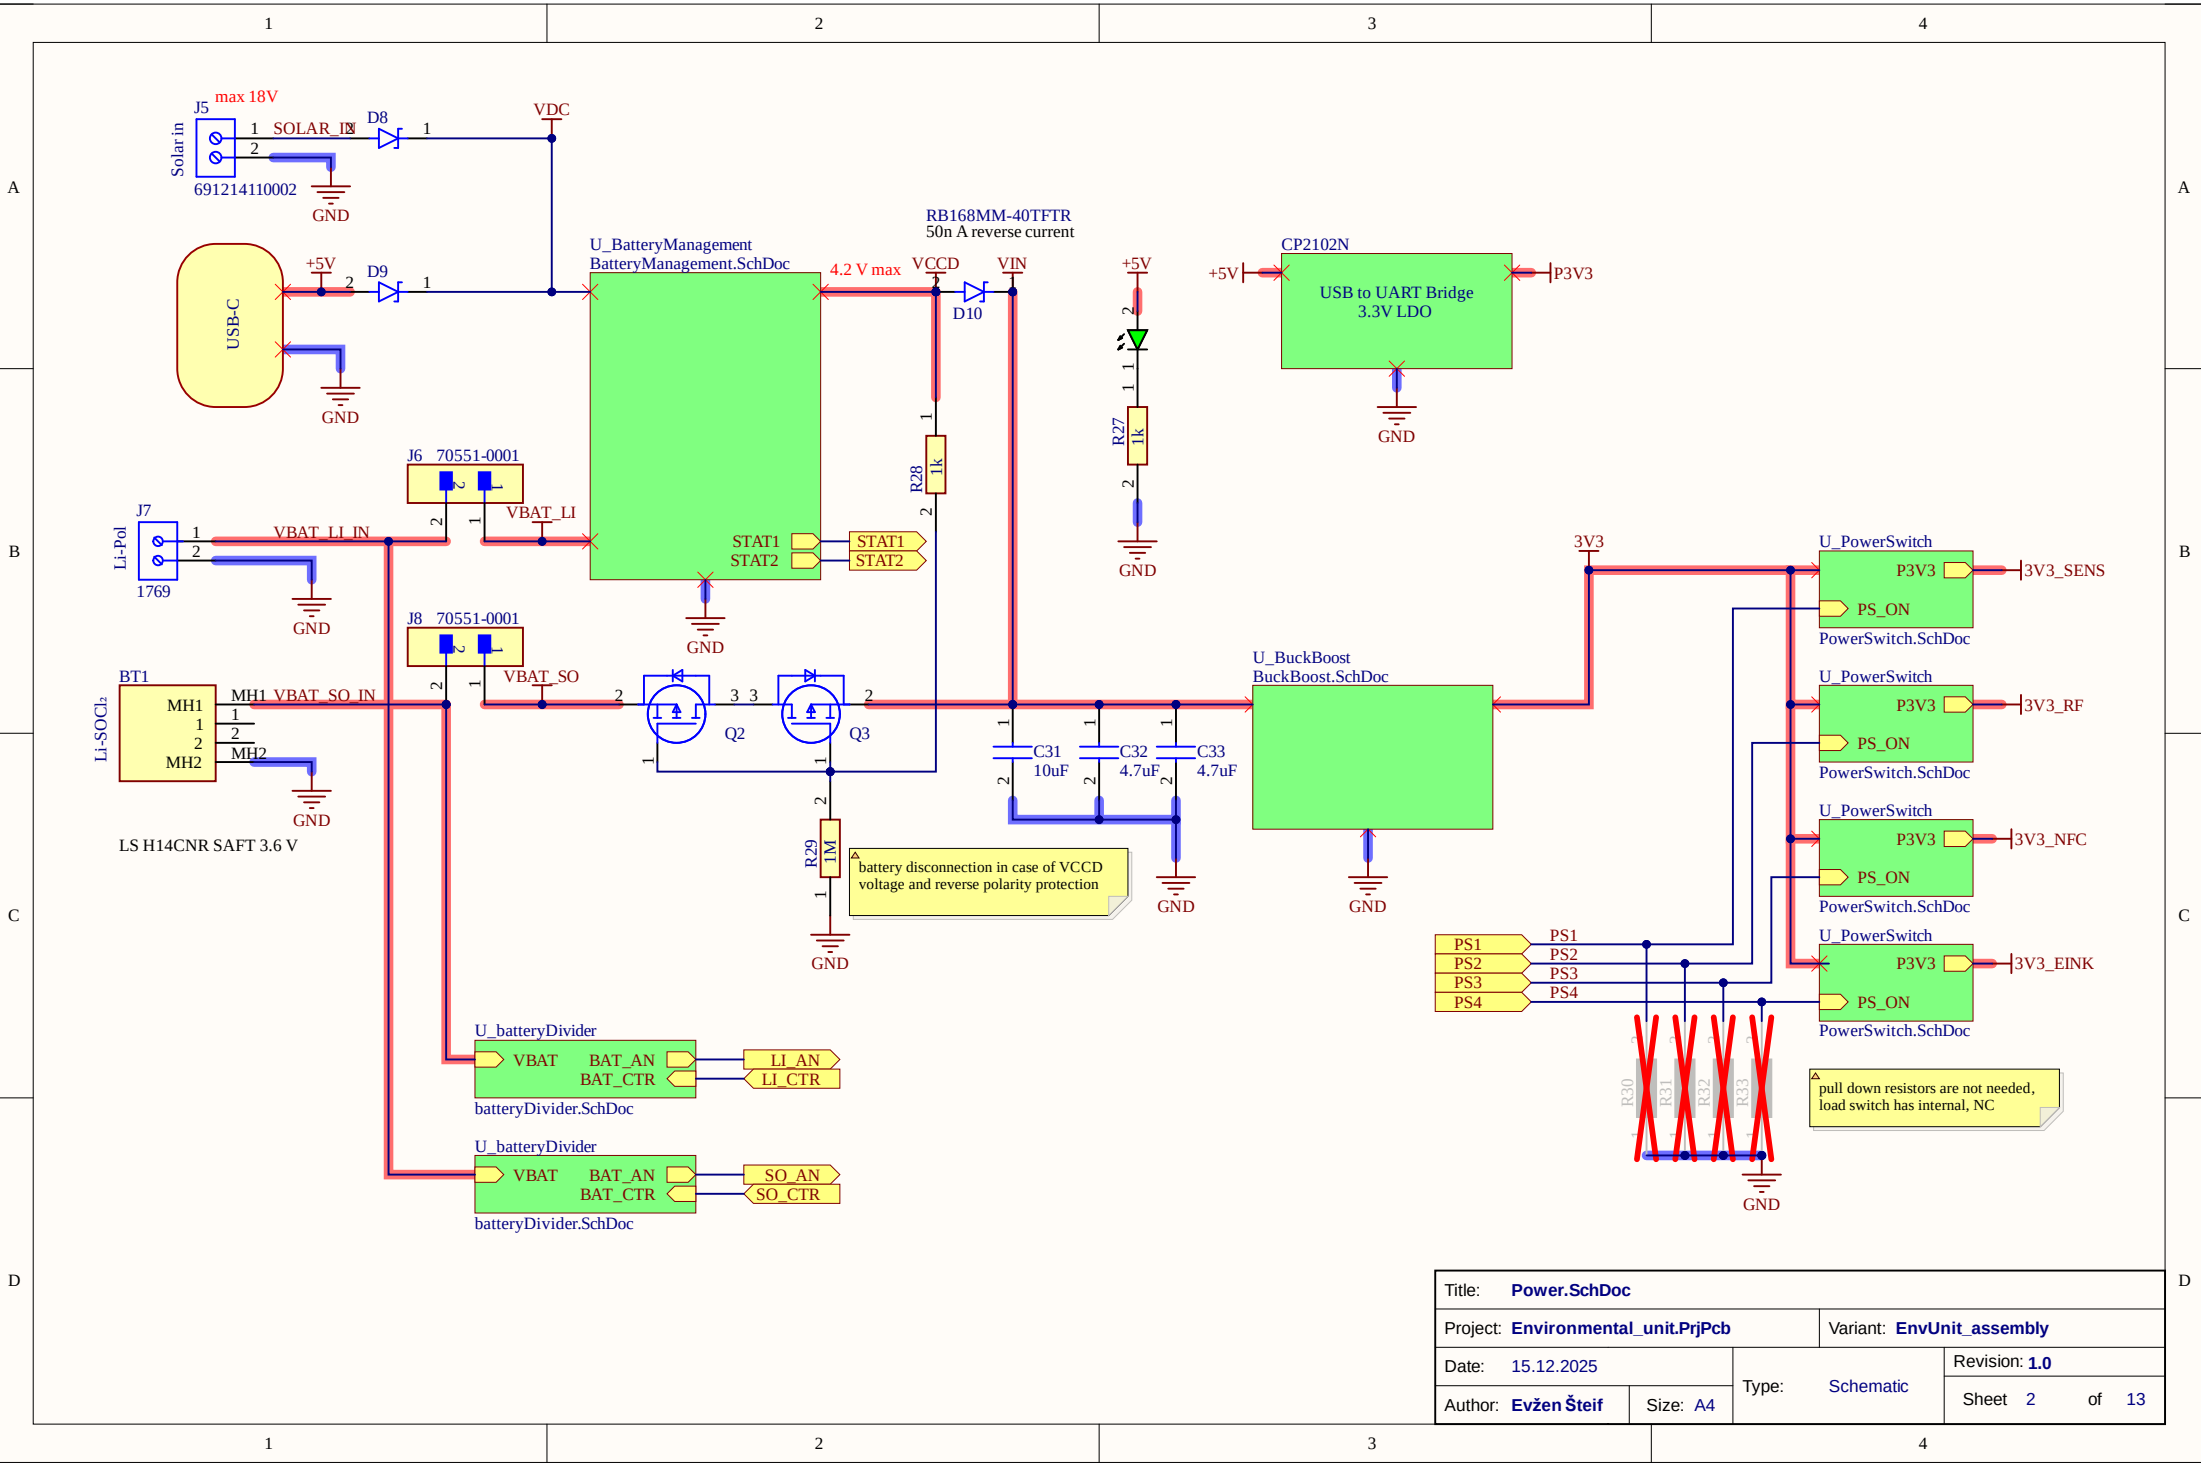


Title: main.SchDoc			
Project: Environmental_unit.PrjPcb		Variant: EnvUnit_assembly	
Date: 15.12.2025	Type: Schematic	Revision: 1.0	
Author: Evžen Šteif		Sheet 1	of 13

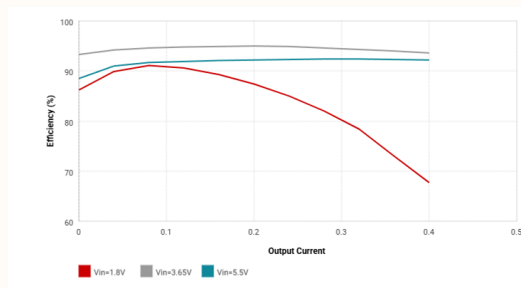

Title: Power.SchDoc			
Project: Environmental_unit.PrjPcb		Variant: EnvUnit_assembly	
Date: 15.12.2025		Type: Schematic	Revision: 1.0
Author: Evžen Šteif	Size: A4		Sheet 2 of 13

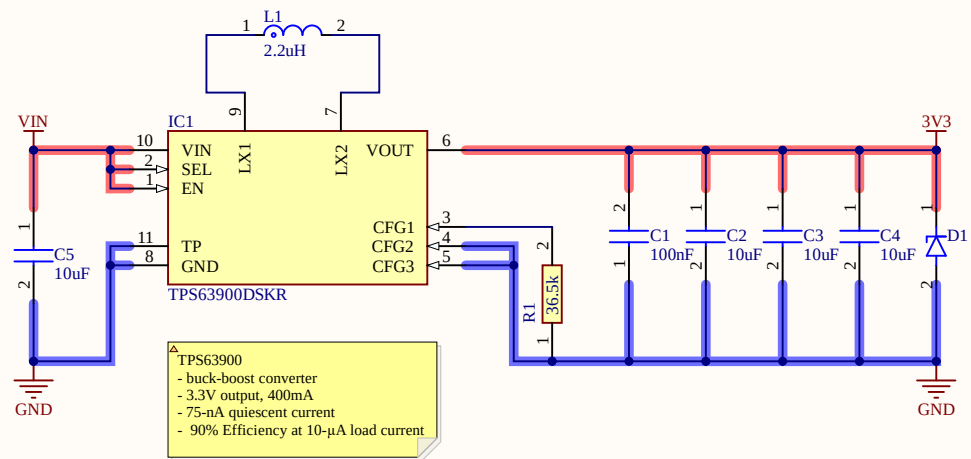


Title: BuckBoost.SchDoc			
Project: Environmental_unit.PrjPcb		Variant: EnvUnit_assembly	
Date: 15.12.2025		Type: Schematic	Revision: 1.0
Author: Evžen Šteif	Size: A4		Sheet 3 of 13

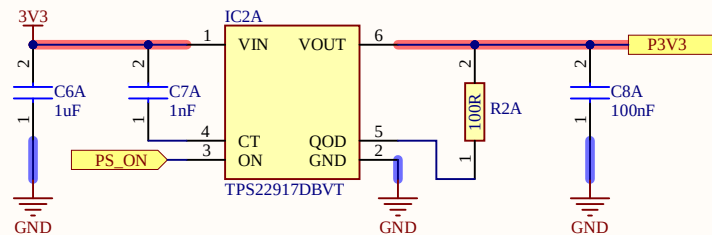


△
TPS229
- load switch, 1 V to 5.5 V, 2A
- ON state (IQ): 0.5 μ A (typical)
- OFF state (ISD): 10 nA (typical)
- Smart ON pin pulldown

Title: PowerSwitch.SchDoc			
Project: Environmental_unit.PrjPcb		Variant: EnvUnit_assembly	
Date: 15.12.2025		Type: Schematic	Revision: 1.0
Author: Evžen Šteif	Size: A4		Sheet 4 of 13

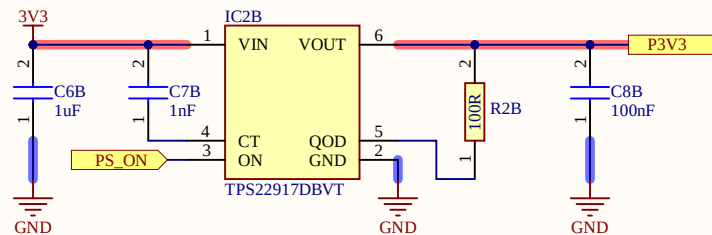


△
TPS229
- load switch, 1 V to 5.5 V, 2A
- ON state (IQ): 0.5 μ A (typical)
- OFF state (ISD): 10 nA (typical)
- Smart ON pin pulldown

Title: PowerSwitch.SchDoc			
Project: Environmental_unit.PrjPcb		Variant: EnvUnit_assembly	
Date: 15.12.2025	Type: Schematic	Revision: 1.0	
Author: Evžen Šteif		Sheet 4	of 13

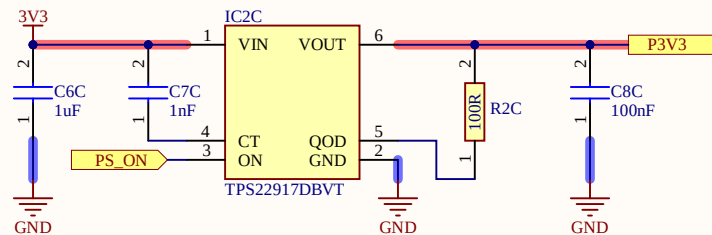


△
TPS229
- load switch, 1 V to 5.5 V, 2A
- ON state (IQ): 0.5 μ A (typical)
- OFF state (ISD): 10 nA (typical)
- Smart ON pin pulldown

Title: PowerSwitch.SchDoc			
Project: Environmental_unit.PrjPcb		Variant: EnvUnit_assembly	
Date: 15.12.2025		Type: Schematic	Revision: 1.0
Author: Evžen Šteif	Size: A4		Sheet 4 of 13

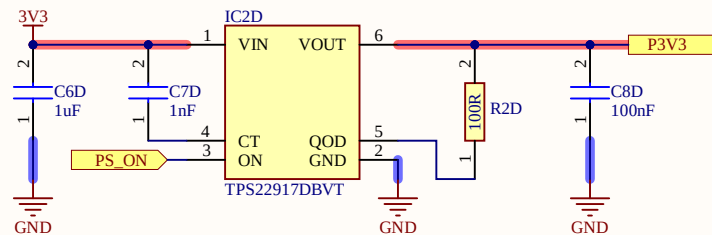


TPS229
- load switch, 1 V to 5.5 V, 2A
- ON state (IQ): 0.5 μ A (typical)
- OFF state (ISD): 10 nA (typical)
- Smart ON pin pulldown

Title: PowerSwitch.SchDoc			
Project: Environmental_unit.PrjPcb		Variant: EnvUnit_assembly	
Date: 15.12.2025		Type: Schematic	Revision: 1.0
Author: Evžen Šteif	Size: A4		Sheet 4 of 13

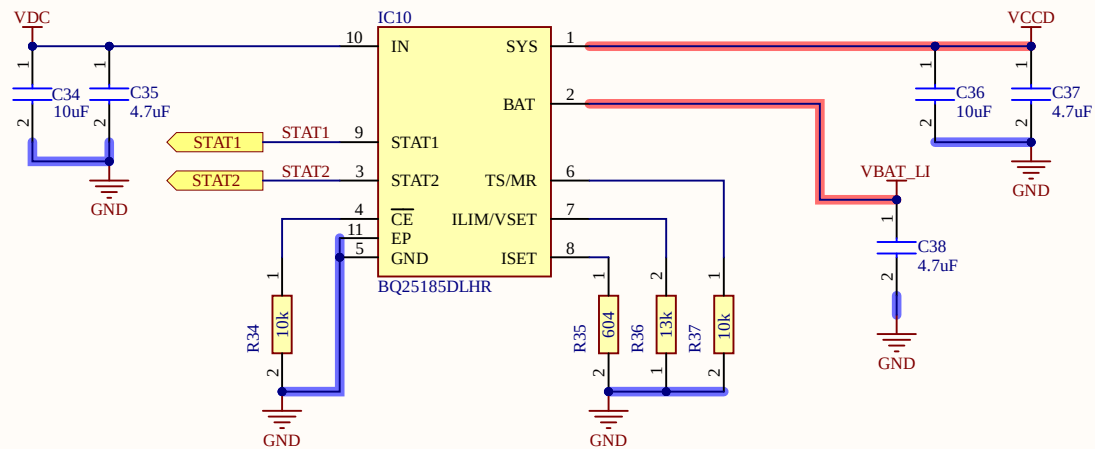


BQ25185
- Linear Battery Charger
- 3.0-V to 18-V input voltage
- input current limit 1A
- 4.5V regulated max out
- 500 mA charging current
- 4-μA quiescent current in Battery Only mode


Title: BatteryManagement.SchDoc			
Project: Environmental_unit.PrjPcb		Variant: EnvUnit_assembly	
Date: 15.12.2025	Type: Schematic	Revision: 1.0	
Author: Evžen Šteif		Sheet 5	of 13

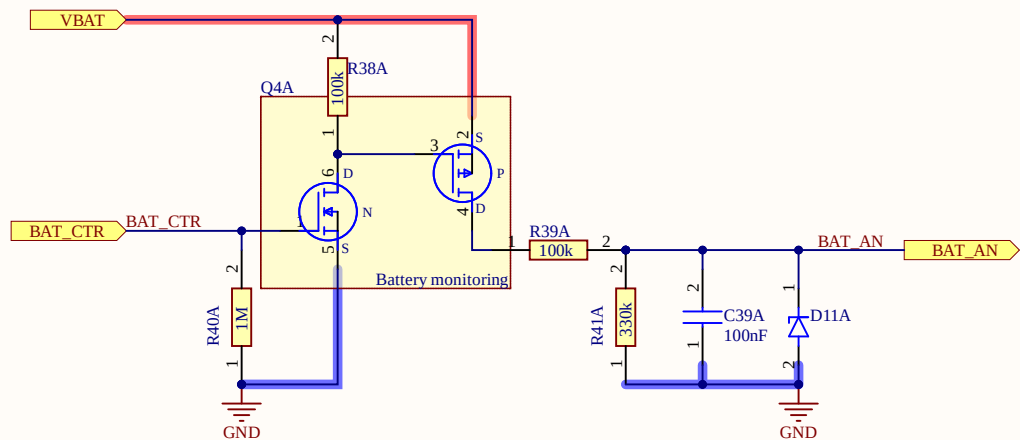


Title: batteryDivider.SchDoc			
Project: Environmental_unit.PrjPcb		Variant: EnvUnit_assembly	
Date: 15.12.2025	Type: Schematic	Revision: 1.0	
Author: Evžen Šteif		Sheet 6	of 13

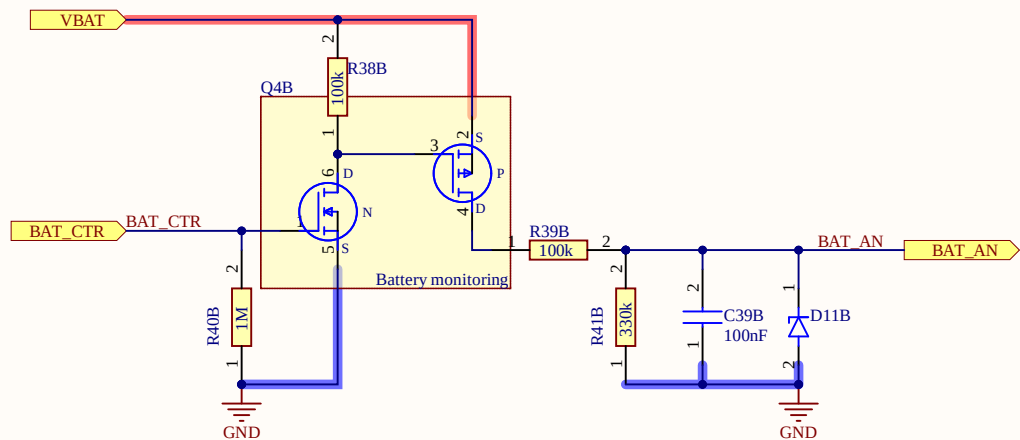


Title: batteryDivider.SchDoc			
Project: Environmental_unit.PrjPcb		Variant: EnvUnit_assembly	
Date: 15.12.2025	Type: Schematic		Revision: 1.0
Author: Evžen Šteif			Sheet 6 of 13

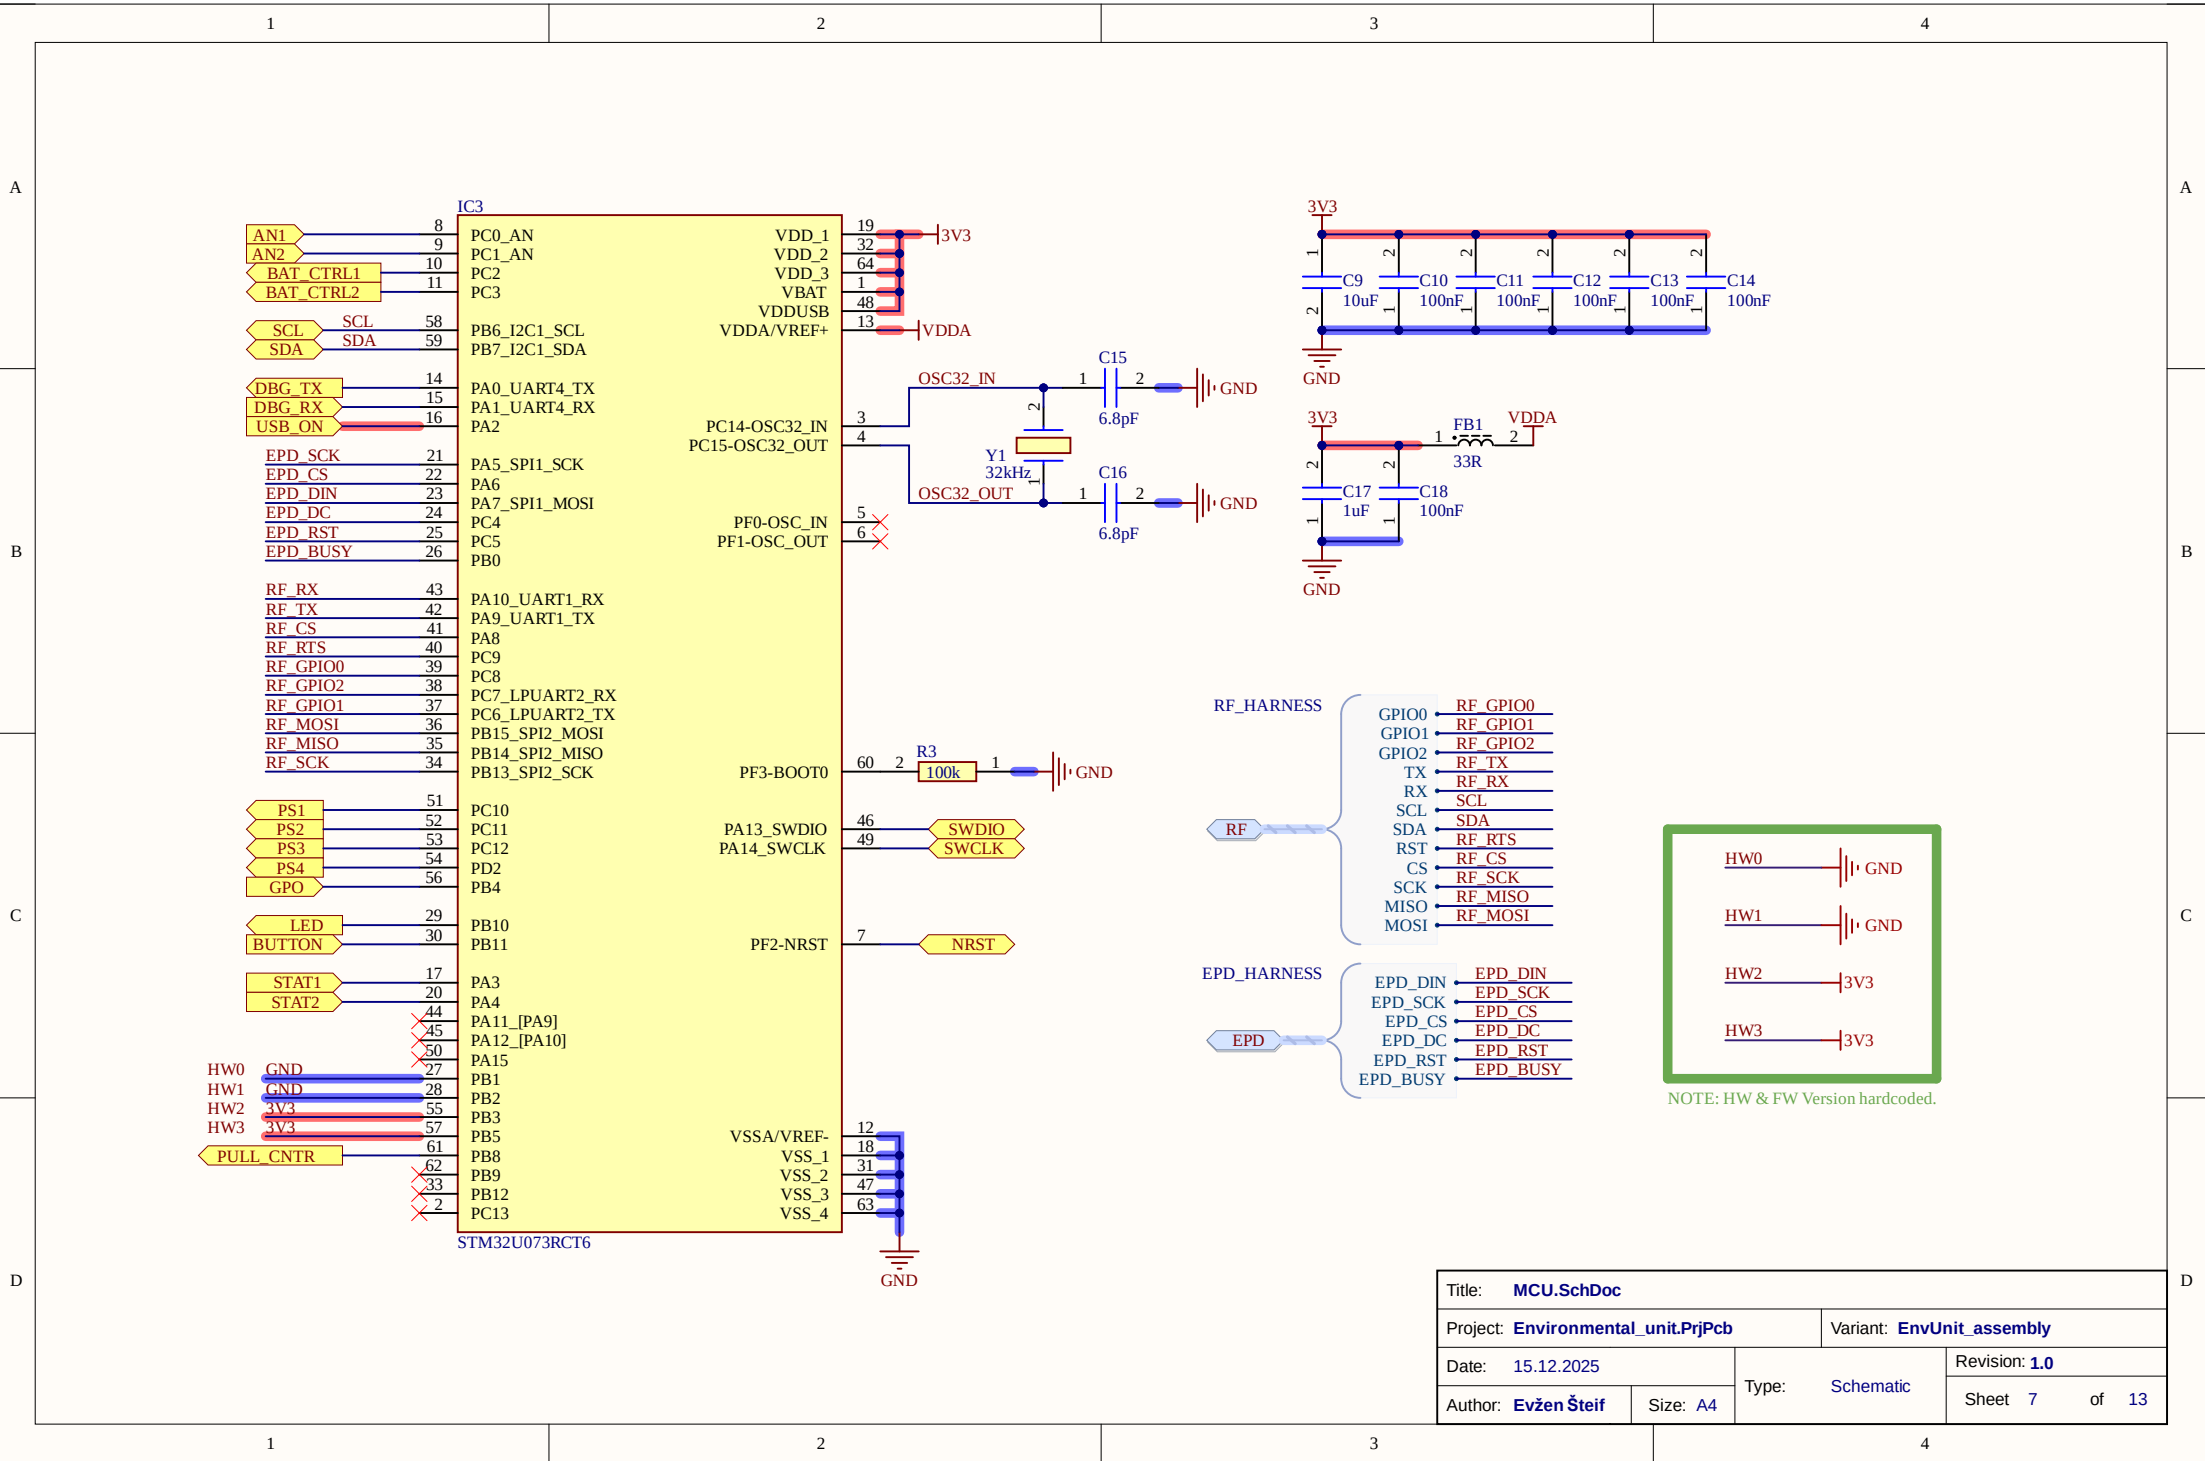


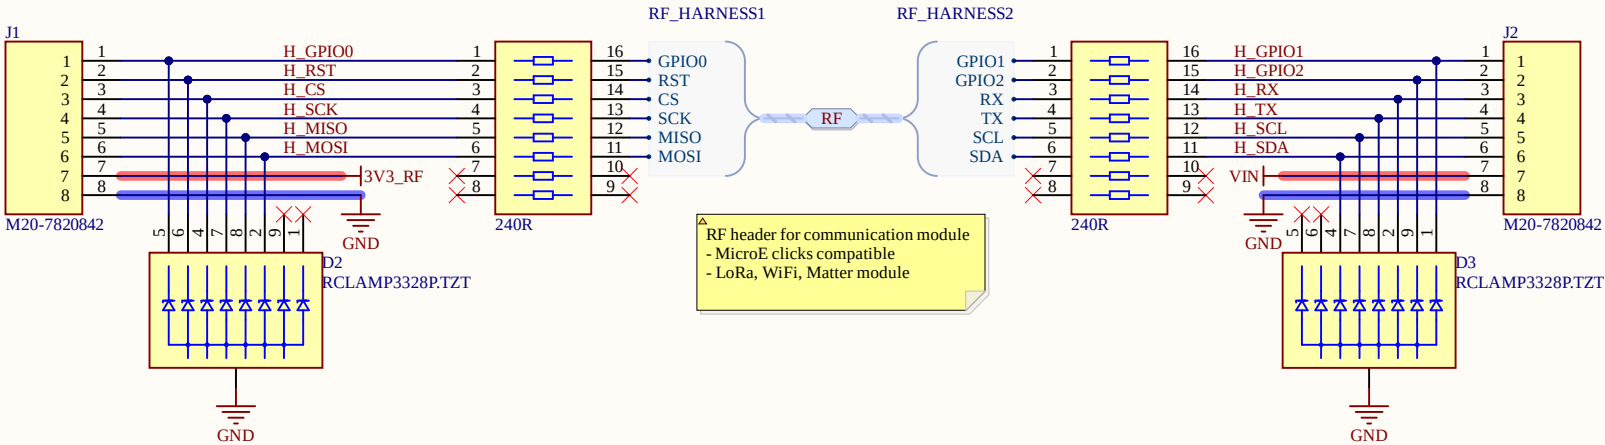


Title: RFHeader.SchDoc			
Project: Environmental_unit.PrjPcb		Variant: EnvUnit_assembly	
Date: 15.12.2025	Type: Schematic	Revision: 1.0	
Author: Evžen Šteif		Sheet 8	of 13

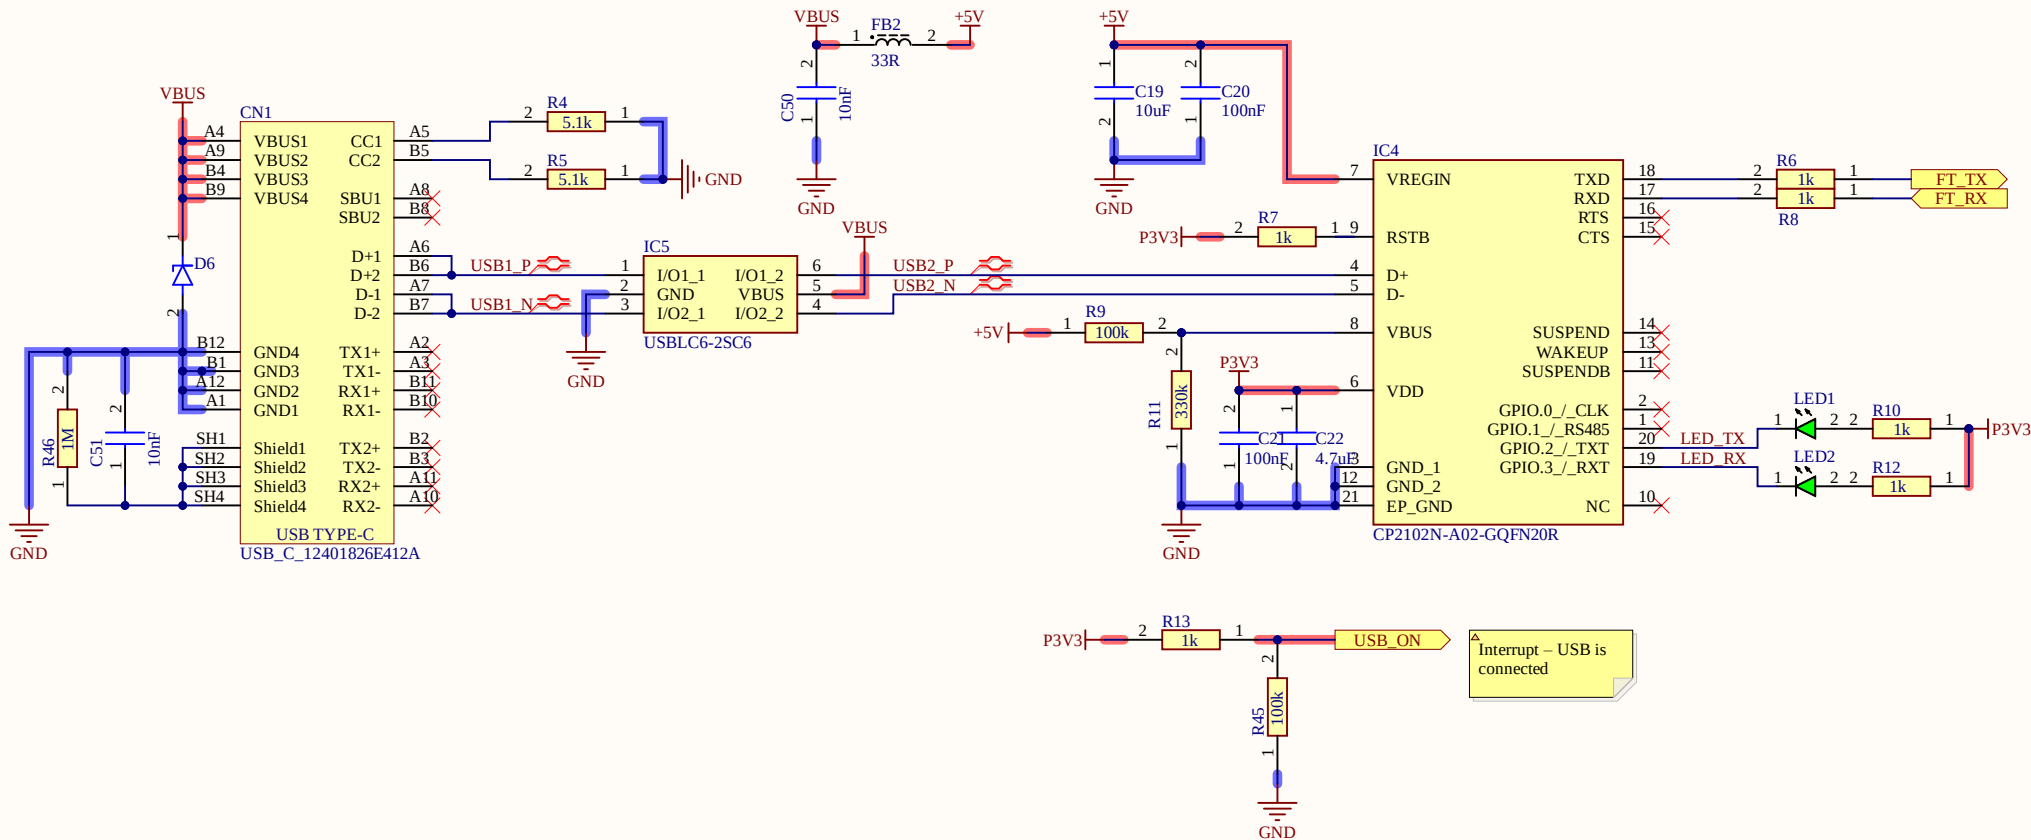


Title: USBtoUART.SchDoc			
Project: Environmental_unit.PrjPcb		Variant: EnvUnit_assembly	
Date: 15.12.2025			Revision: 1.0
Author: Evžen Šteif	Size: A4	Type: Schematic	Sheet 9 of 13

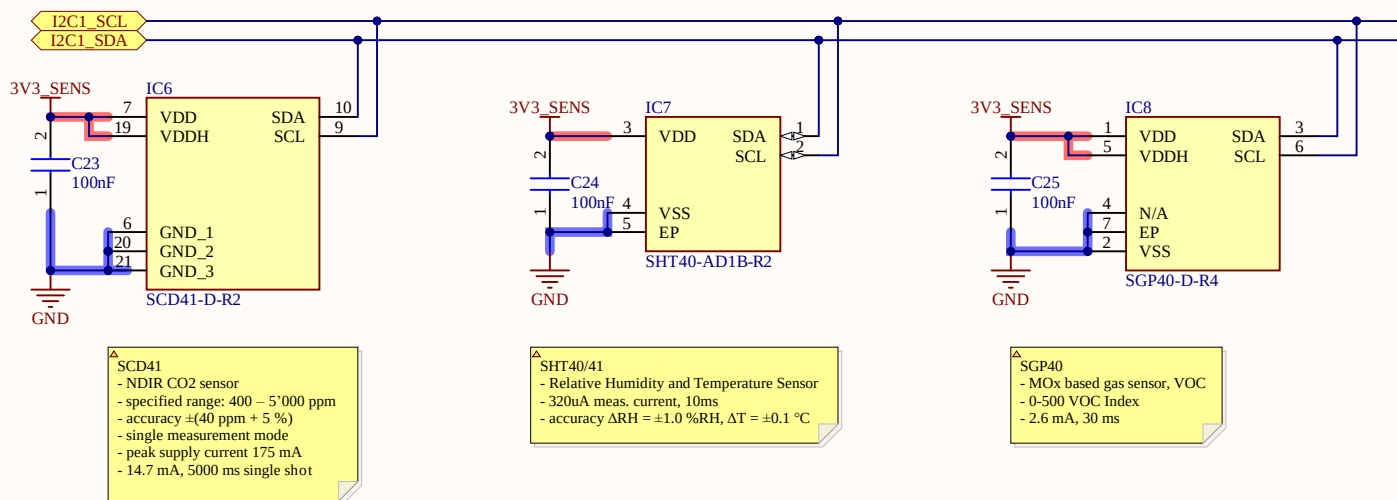

Title: Sensors.SchDoc			
Project: Environmental_unit.PrjPcb		Variant: EnvUnit_assembly	
Date: 15.12.2025		Type: Schematic	Revision: 1.0
Author: Evžen Šteif	Size: A4		Sheet 10 of 13

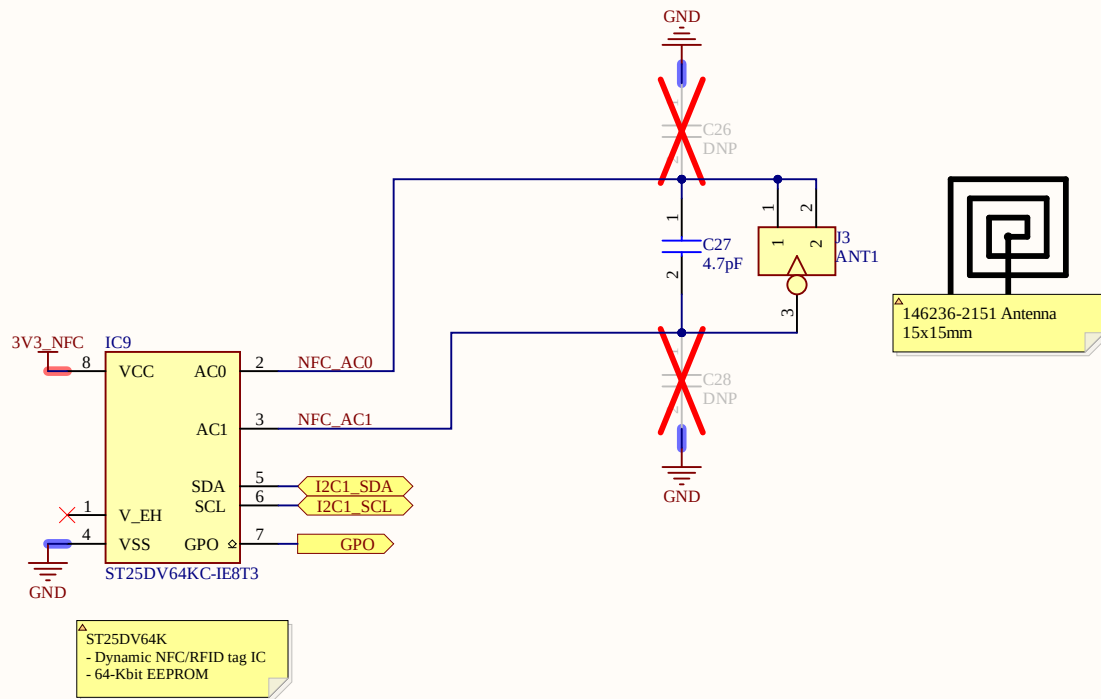

Title: NFC.SchDoc			
Project: Environmental_unit.PrjPcb		Variant: EnvUnit_assembly	
Date: 15.12.2025	Type: Schematic		Revision: 1.0
Author: Evžen Šteif			Sheet 11 of 13
Size: A4			

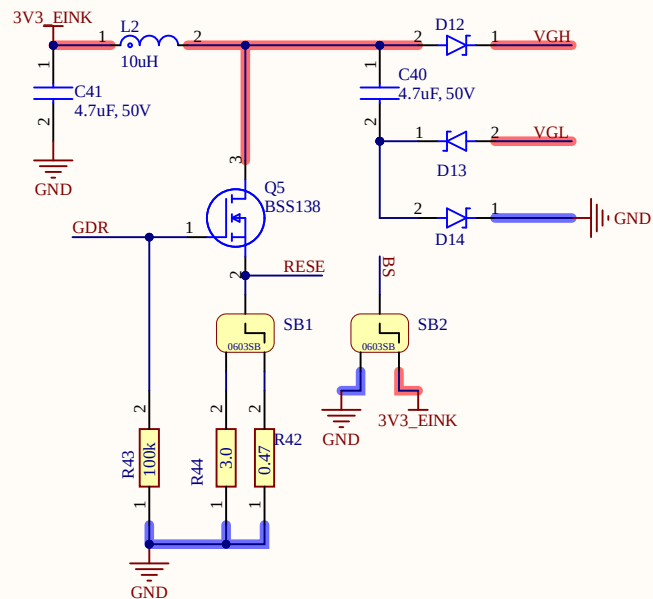


SB1 selection:

Resistor (Display Config)	Display
0.47R (B)	2.13inch e-Paper (D), 2.7inch e-Paper, 2.9inch e-Paper (D)
	4.01inch e-Paper (F), 4.2inch e-Paper (C), 5.65inch e-Paper (F)
	5.83inch e-Paper, 5.83inch e-Paper (B), 7.5inch e-Paper
	7.5inch e-Paper (B)
3R (A)	1.54inch e-Paper, 1.54inch e-Paper(B), 2.13inch e-Paper
	2.13inch e-Paper (B), 2.66inch e-Paper, 2.66inch e-Paper (B)
	2.9inch e-Paper, 2.9inch e-Paper (B), 3.7inch e-Paper
	4.2inch e-Paper, 4.2inch e-Paper (B), 13.3inch e-Paper (B)
	13.3inch e-Paper



SB2 selection:

BS	VCC	GND
Interface	3-line SPI	4-line SPI

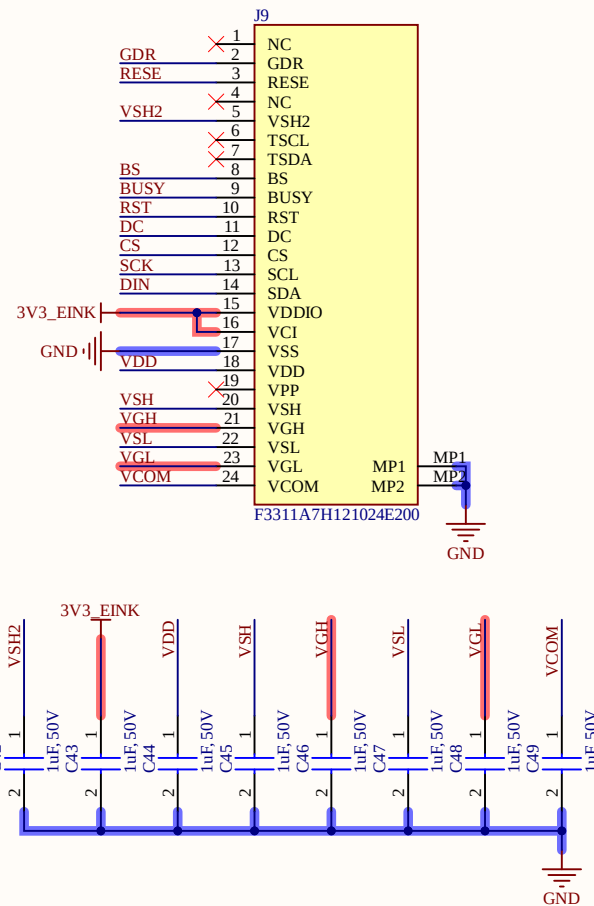


Compatible with waveshare e-ink displays

for example:
2.13 inch E-Ink display

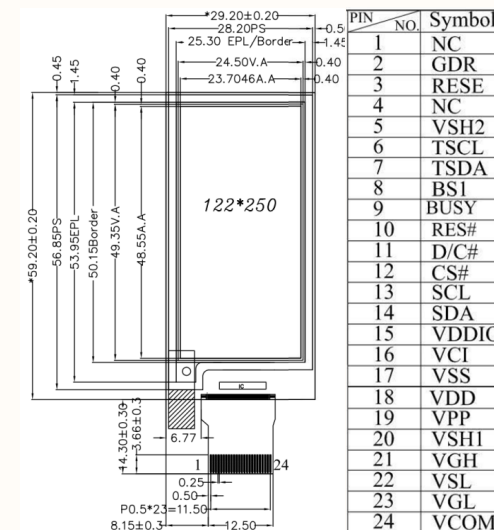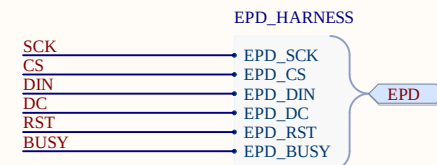

PIN	No.	Symbol
5400	1	NC
	2	GDR
	3	RESE
	4	NC
	5	VSH2
	6	TSCL
	7	TSDA
	8	BS1
	9	BUSY
	10	RES#
	11	D/C#
	12	CS#
	13	SCL
	14	SDA
	15	VDDIO
	16	VCI
	17	VSS
	18	VDD
	19	VPP
	20	VSH1
	21	VGH
	22	VSL
	23	VGL
	24	VCOM

Title: ElnkHeader.SchDoc			
Project: Environmental_unit.PrjPcb		Variant: EnvUnit_assembly	
Date: 15.12.2025		Type: Schematic	Revision: 1.0
Author: Evžen Šteif	Size: A4		Sheet 12 of 13

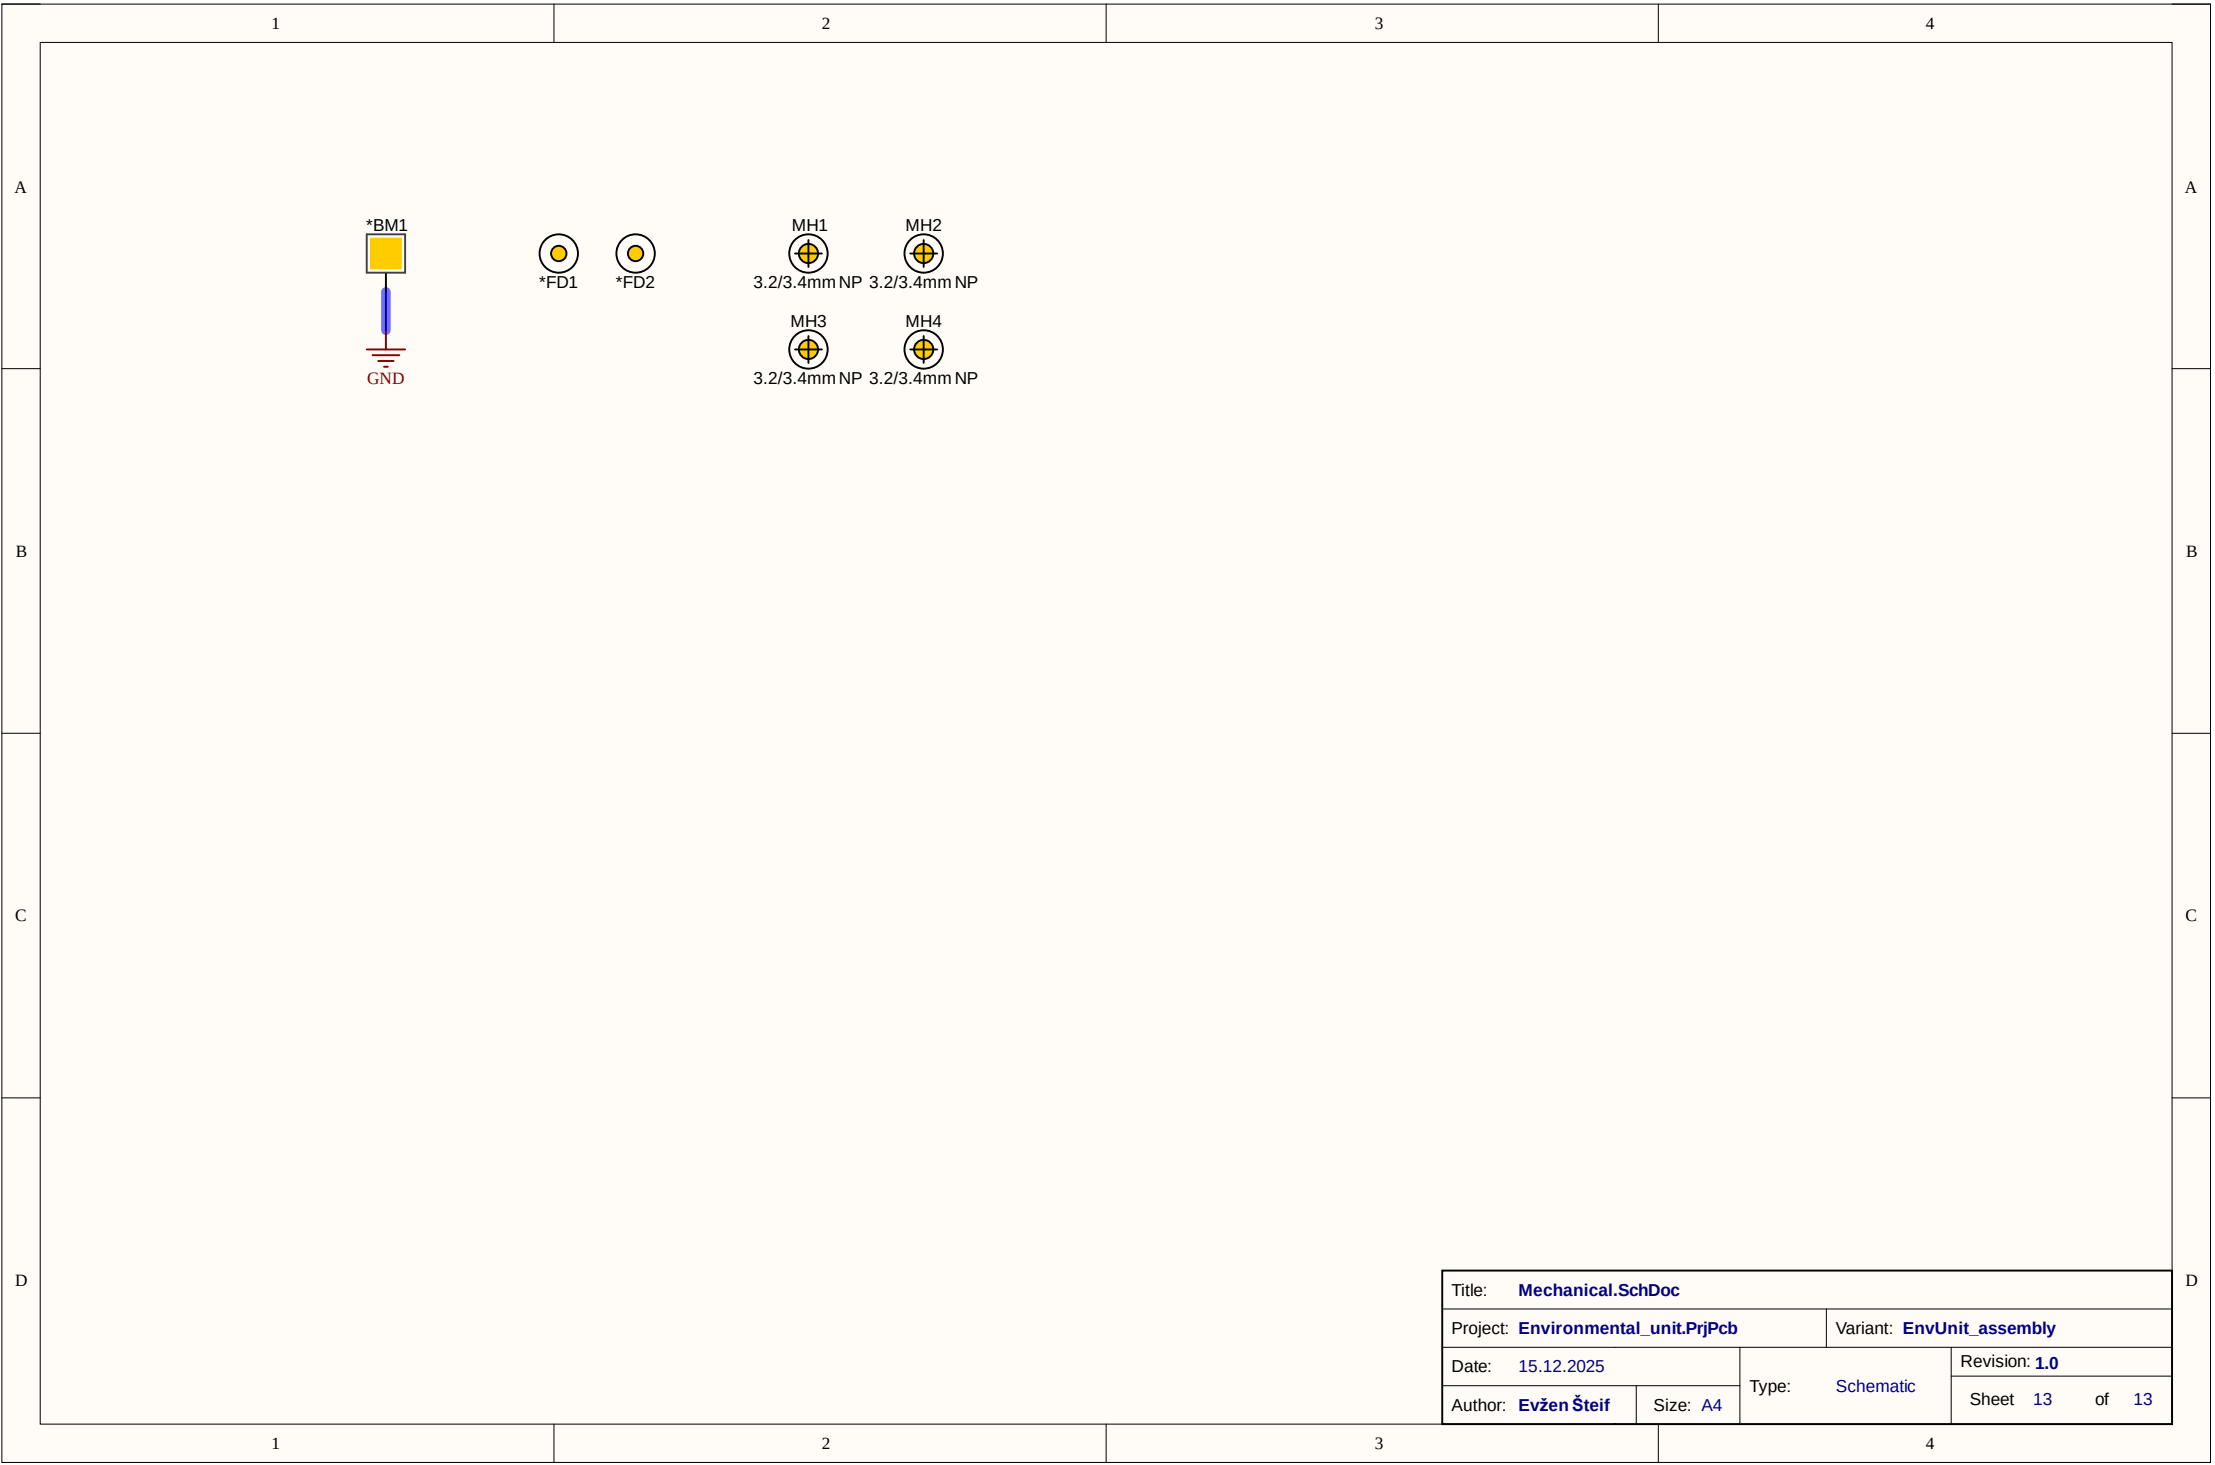

Title: Mechanical.SchDoc			
Project: Environmental_unit.PrjPcb		Variant: EnvUnit_assembly	
Date: 15.12.2025		Type: Schematic	Revision: 1.0
Author: Evžen Šteif	Size: A4		Sheet 13 of 13