


1 Product Selection

		Rated operational current	max. Motor rating three-phase motors 50 - 60 Hz						Conventional thermal current	Contact assembly		Contact sequence
		AC-3	AC-3			AC-4			3-pole AC-1 at 40 °C open	N/O = normally open N/C = normally closed contact		
		380 V 400 V	220 V 230 V	380 V 400 V	660 V 690 V	220 V 230 V	380 V 400 V	660 V 690 V				
		I_e	P	P	P	P	P	P	$I_{th} = I_e$			
		A	kW	kW	kW	kW	kW	kW	A			
		Basic devices										
		Screw terminals 3 pole, with auxiliary contact										
	IE3	7	2.2	3	3.5	1	2.2	2.9	22	1 N/O	–	
		7	2.2	3	3.5	1	2.2	2.9	22	–	1 N/C	
		9	2.5	4	4.5	1.5	2.5	3.6	22	1 N/O	–	
		9	2.5	4	4.5	1.5	2.5	3.6	22	–	1 N/C	
		12	3.5	5.5	6.5	2	3	4.4	22	1 N/O	–	
		12	3.5	5.5	6.5	2	3	4.4	22	–	1 N/C	
	–	15.5	4	7.5	7	2	3	4.4	22	1 N/O	–	
	–	15.5	4	7.5	7	2	3	4.4	22	–	1 N/C	
	IE3	18	5	7.5	11	2.5	4.5	6.5	40	1 N/O	–	
		18	5	7.5	11	2.5	4.5	6.5	40	–	1 N/C	
		25	7.5	11	14	3.5	6	8.5	45	1 N/O	–	
		25	7.5	11	14	3.5	6	8.5	45	–	1 N/C	
		32	10	15	17	4	7	10	45	1 N/O	–	
		32	10	15	17	4	7	10	45	–	1 N/C	
	–	38	11	18.5	21	4	7	10	45	1 N/O	–	
	–	38	11	18.5	21	4	7	10	45	–	1 N/C	

Notes


Information relevant for export to North America

Product standards	IEC/EN 60947-4-1; UL 60947-4-1; CSA-C22.2 No. 60947-4-1-14; CE marking
UL File No.	E29096
UL CCN	NLDX
CSA File No.	012528
CSA Class No.	2411-03, 3211-04
NA Certification	UL Listed, CSA certified

IE3 Also suitable for motors with efficiency class IE3.
IE3-ready devices are identified by the logo on their packaging.

Can be combined with auxiliary contact	AC operation **Type** Article no.	DC operation **Type** Article no.		Std. pack	**Notes**
DILM32-XHI… DILA-XHI(V)…	**DILM7-10(230V50HZ,240V60HZ)** 276550	**DILM7-10(24VDC)** 276565	D	1 pc.	Contacts according to EN 50012. For DC operated conductors DILM7 - DILM15 the following applies: Integrated varistor suppressor circuit. For DC operated conductors DILM17 - DILM170 the following applies: Integrated suppressor circuit in actuating electronics. For DILM7-01 – DILM38-01 the following applies: With mirror contact.
DILA-XHI(V)…	**DILM7-01(230V50HZ,240V60HZ)** 276585	**DILM7-01(24VDC)** 276600	D		
DILM32-XHI… DILA-XHI(V)…	**DILM9-10(230V50HZ,240V60HZ)** 276690	**DILM9-10(24VDC)** 276705	D		
DILA-XHI(V)…	**DILM9-01(230V50HZ,240V60HZ)** 276725	**DILM9-01(24VDC)** 276740	D		
DILM32-XHI… DILA-XHI(V)…	**DILM12-10(230V50HZ,240V60HZ)** 276830	**DILM12-10(24VDC)** 276845	D		
DILA-XHI(V)…	**DILM12-01(230V50HZ,240V60HZ)** 276865	**DILM12-01(24VDC)** 276880	D		
DILM32-XHI… DILA-XHI(V)…	**DILM15-10(230V50HZ,240V60HZ)**[1] 290058	**DILM15-10(24VDC)**[1] 290073	D		
DILA-XHI(V)…	**DILM15-01(230V50HZ,240V60HZ)**[1] 290093	**DILM15-01(24VDC)**[1] 290108	D		
DILM32-XHI… DILA-XHI(V)… DILM32-XHI11-S	**DILM17-10(230V50HZ,240V60HZ)** 277004	**DILM17-10(RDC24)** 277018	D		
DILA-XHI(V)… DILM32-XHI11-S	**DILM17-01(230V50HZ,240V60HZ)** 277036	**DILM17-01(RDC24)** 277050	D		
DILM32-XHI… DILA-XHI(V)… DILM32-XHI11-S	**DILM25-10(230V50HZ,240V60HZ)** 277132	**DILM25-10(RDC24)** 277146	D		
DILA-XHI(V)… DILM32-XHI11-S	**DILM25-01(230V50HZ,240V60HZ)** 277164	**DILM25-01(RDC24)** 277178	D		
DILM32-XHI… DILA-XHI(V)… DILM32-XHI11-S	**DILM32-10(230V50HZ,240V60HZ)** 277260	**DILM32-10(RDC24)** 277274	D		
DILA-XHI(V)… DILM32-XHI11-S	**DILM32-01(230V50HZ,240V60HZ)** 277292	**DILM32-01(RDC24)** 277306	D		
DILM32-XHI… DILA-XHI(V)… DILM32-XHI11-S	**DILM38-10(230V50HZ,240V60HZ)**[1] 112428	**DILM38-10(RDC24)**[1] 112442	D		
DILA-XHI(V)… DILM32-XHI11-S	**DILM38-01(230V50HZ,240V60HZ)**[1] 112456	**DILM38-01(RDC24)**[1] 112470	D		

[1] Electrical lifespan → Page 1/97

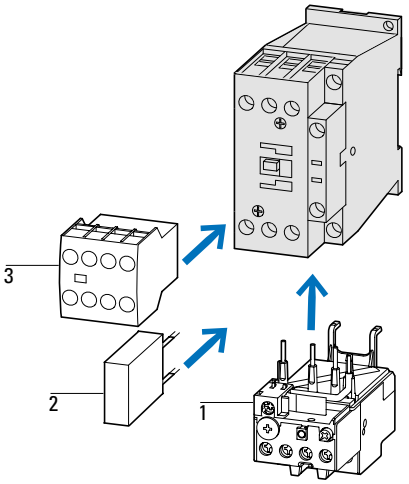

Accessories	**Page**
1 Overload relays	→ 2/8
2 Suppressor	→ 1/12
3 Auxiliary contact module	→ 1/44
Accessories	→ 1/66
Further actuating voltages	→ 1/84

D in conjunction with SmartWire-DT module → Page 1/72