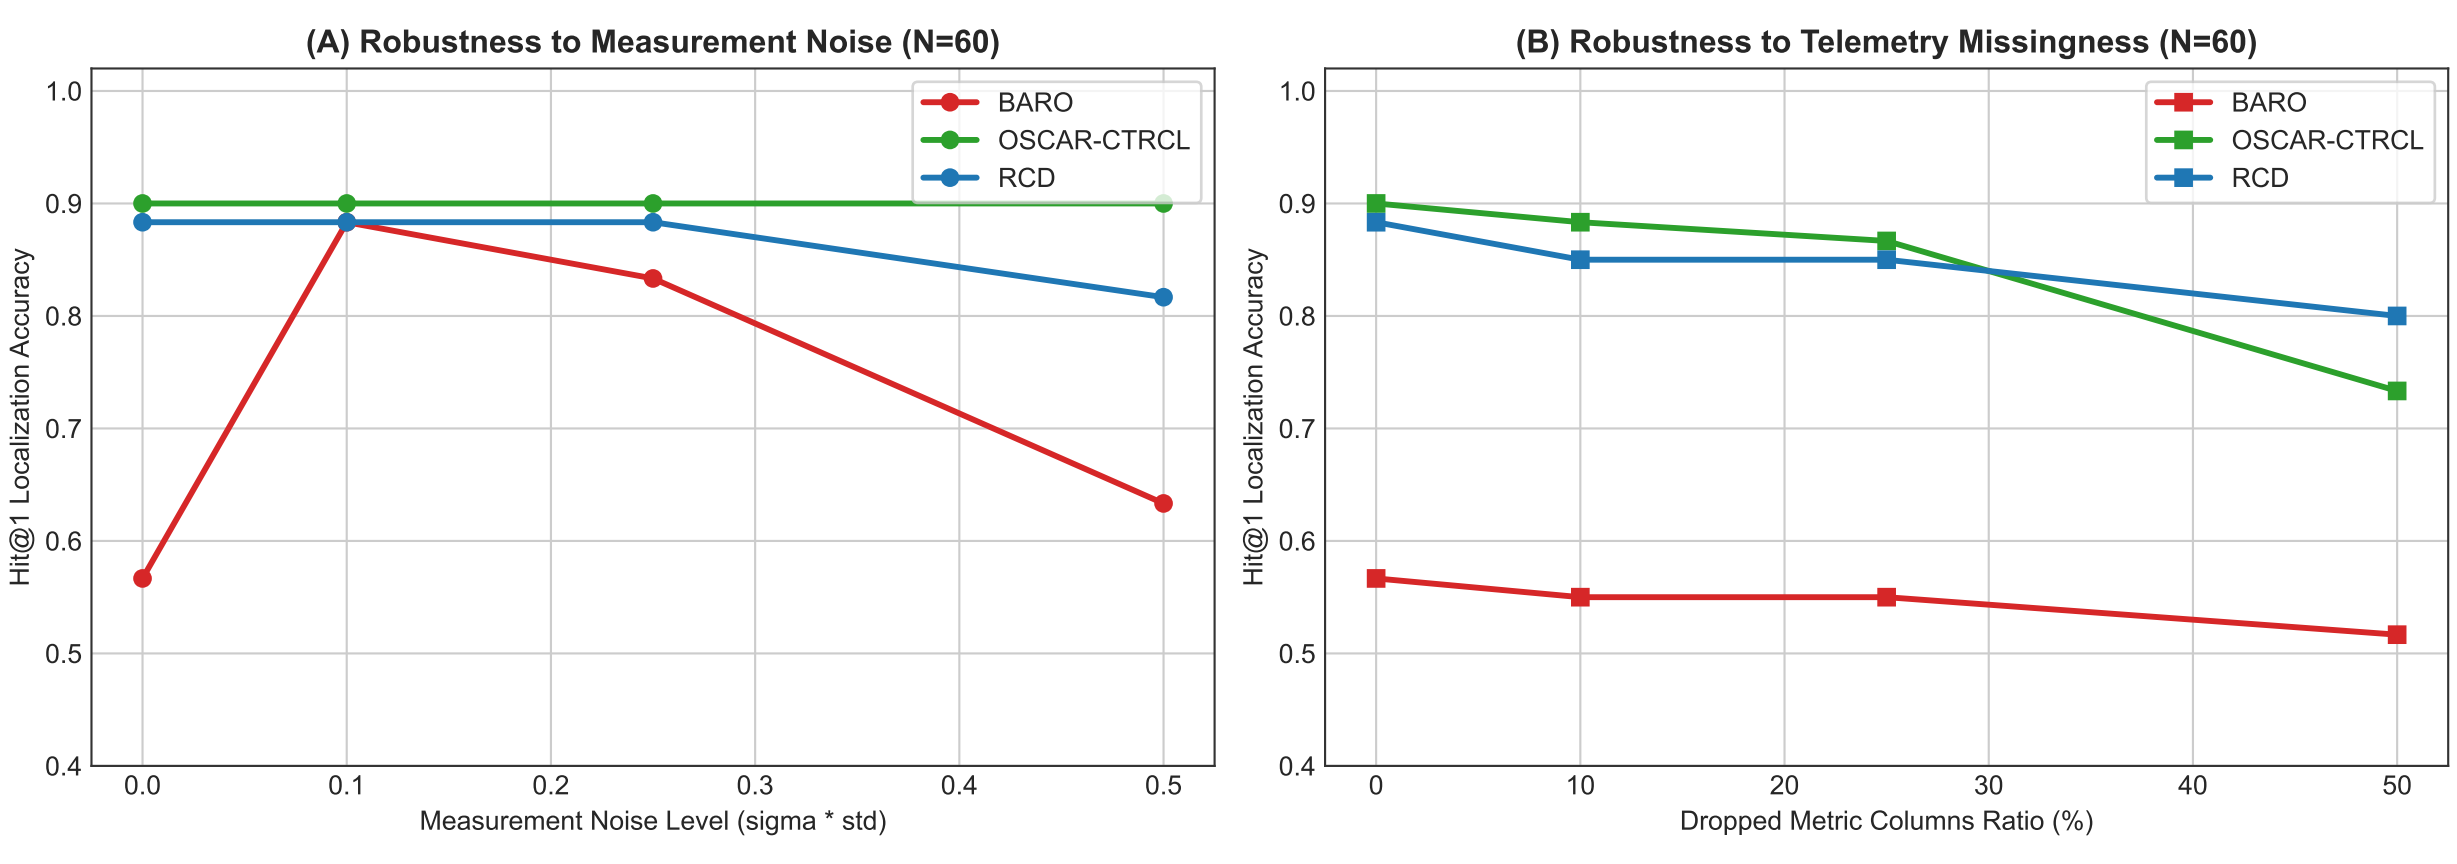
(A) Robustness to Measurement Noise (N=60)
Hit@1 Localization Accuracy
Measurement Noise Level (sigma * std)
BARO
OSCAR-CTRCL
RCD
1.0
0.9
0.8
0.7
0.6
0.5
0.4
0.0
0.1
0.2
0.3
0.4
0.5
(B) Robustness to Telemetry Missingness (N=60)
Hit@1 Localization Accuracy
Dropped Metric Columns Ratio (%)
BARO
OSCAR-CTRCL
RCD
0
10
20
30
40
50