
3DP-311 Tile enclosure — threaded insert drawing (JLC3DP threaded insert service)

Lorenzo Bologna — muon-time-dilation project · units mm · 3DP-311_Tile_enclosure.step · drawing generated from the uploaded model, same coordinates


TOP VIEW (looking down -Z) — inserts marked in red

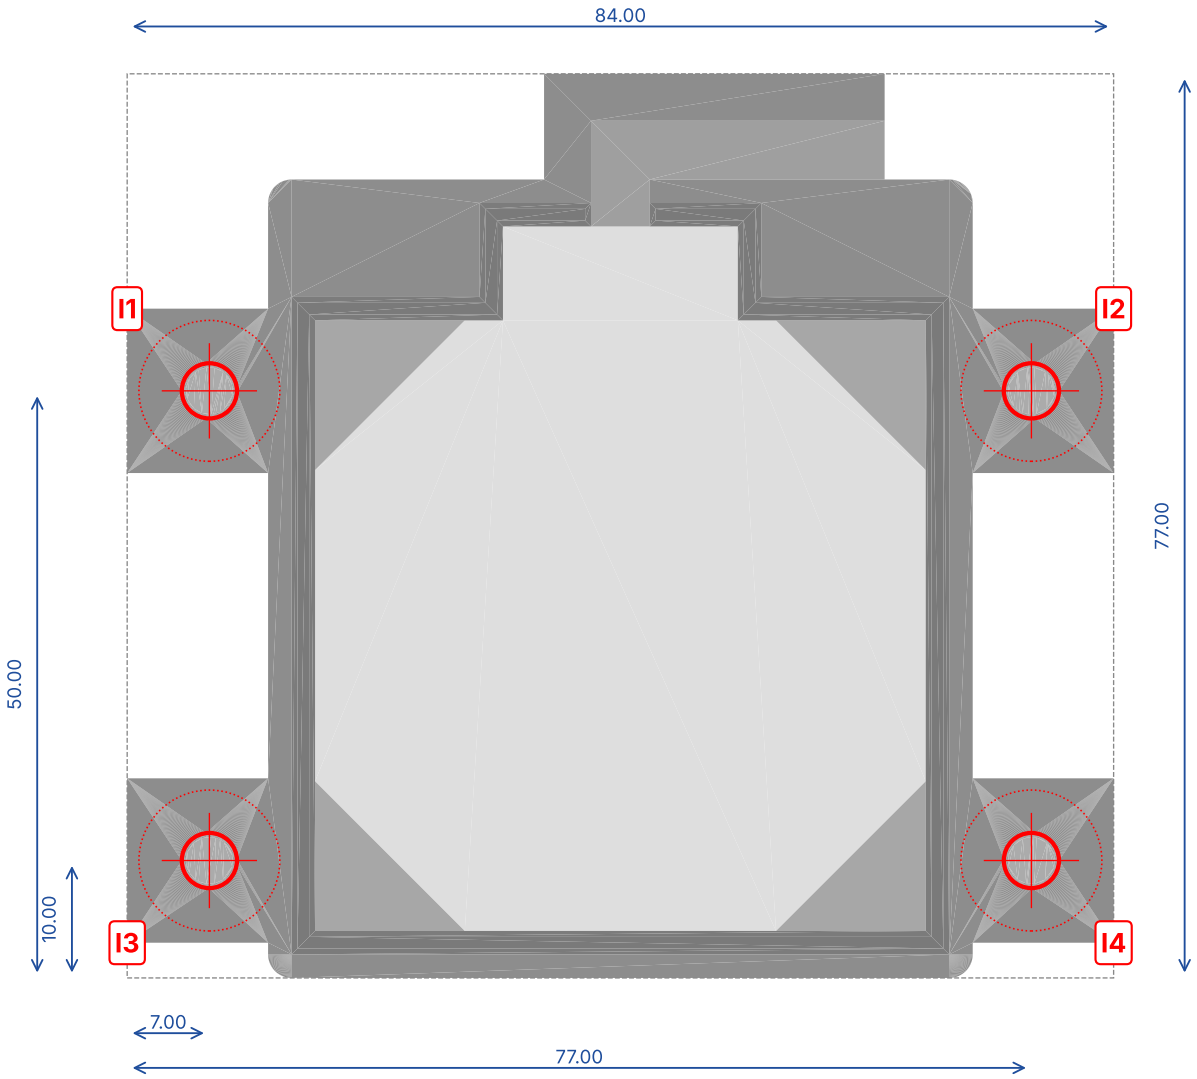

Part file	3DP-311_Tile_enclosure.step
Part qty in order	2
Material	9600 Resin (white)
Insert type (JLC3DP table)	Type 1 — TTH-M3*6.25-HD4.7
Thread	M3 (ID 3.0, OD 4.73, L 6.25)
Inserts per part	4 (I1–I4)
Total inserts for this file	8
Hole as modelled	Ø4.7 × 1.0 boss + Ø4.0 x 7.0 below = 8.0 total
Insert direction	From top (+Z), flush with face Z = 26.00

Insert	X from left edge	Y from bottom edge	Z face
I1	7.00	50.00	26.00
I2	77.00	50.00	26.00
I3	7.00	10.00	26.00
I4	77.00	10.00	26.00

SECTION at Y = 50.00 from bottom edge (through I1/I2) — insert holes open upward

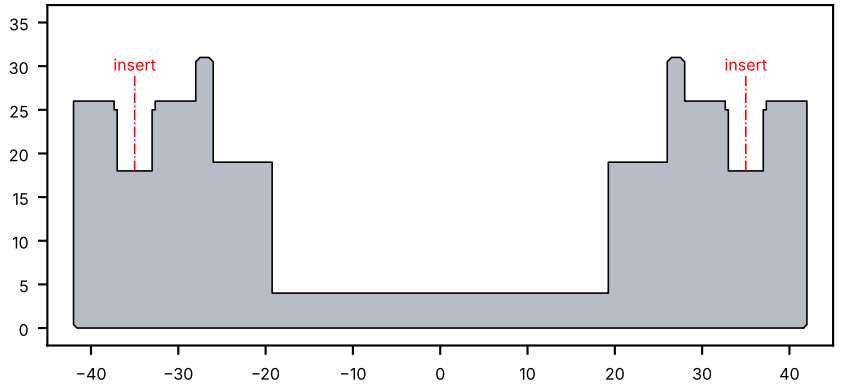

Notes: install the 4 inserts I1-I4 flush with the face, from the open (+Z) side.
No inserts in other holes. Holes = JLC3DP Type 1 (B 1.0, C 7.0, D 8.0).