


1) Добавил 2 компьютера и связал их

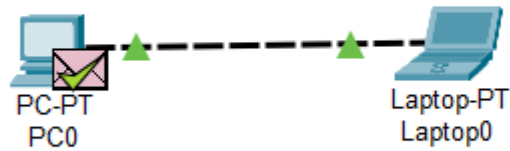

2) Добавил им IP адреса

IP Configuration	
<input type="radio"/> DHCP	
<input checked="" type="radio"/> Static	
IPv4 Address	192.168.0.1
Subnet Mask	255.255.255.0

IP Configuration	
<input type="radio"/> DHCP	
<input checked="" type="radio"/> Static	
IPv4 Address	192.168.0.2
Subnet Mask	255.255.255.0

3) Проверил работоспособность сети

The screenshot shows a "PC0" window with tabs for Physical, Config, Desktop, Programming, and Attributes. The "Desktop" tab is active, showing a "Command Prompt" window. The text in the Command Prompt is as follows:



```
Cisco Packet Tracer PC Command Line 1.0
C:\>ping 192.168.0.2

Pinging 192.168.0.2 with 32 bytes of data:
Reply from 192.168.0.2: bytes=32 time<1ms TTL=128
Reply from 192.168.0.2: bytes=32 time<1ms TTL=128
Reply from 192.168.0.2: bytes=32 time<1ms TTL=128
Reply from 192.168.0.2: bytes=32 time<1ms TTL=128

Ping statistics for 192.168.0.2:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 0ms, Average = 0ms
C:\>
```

4)Проверил с помощью симуляции

Simulation Panel		
Event List		
Vis.	Time(sec)	Last Device
	0.000	--
	0.001	PC0
Visible	0.002	Laptop0

Event List										
Fire	Last Status	Source	Destination	Type	Color	Time(sec)	Periodic	Num	Edit	Delete
	Successful	PC0	Laptop0	ICMP		0.000	N	0	(edit)	