


Создал сеть

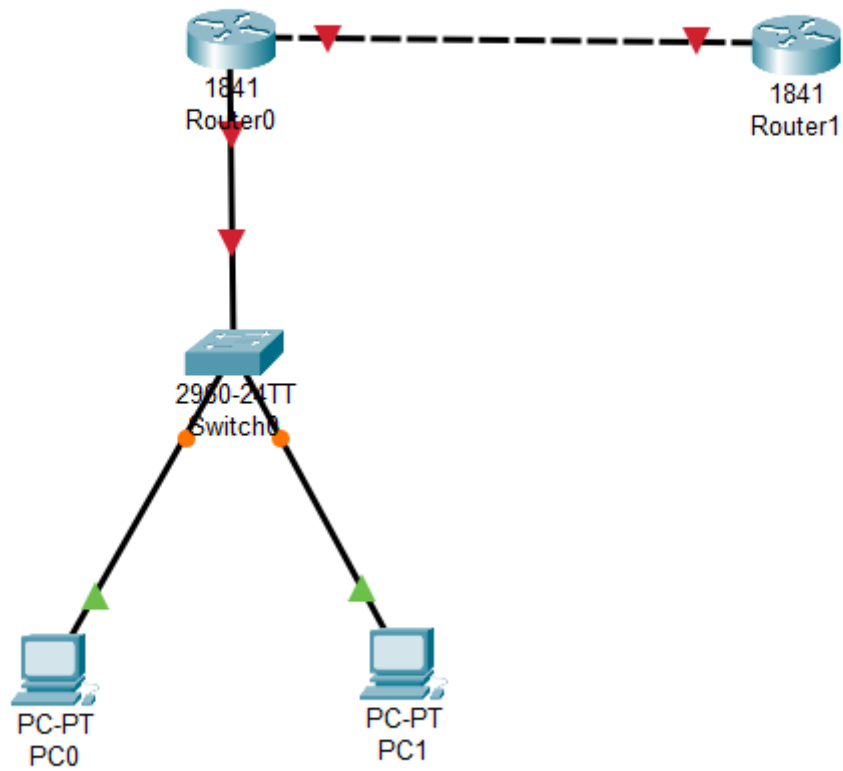

Настроил компы

Настроил роутеры

Router0

Physical Config CLI Attributes

GLOBAL

Settings

Algorithm Settings

ROUTING

Static

RIP

SWITCHING

VLAN Database

INTERFACE

FastEthernet0/0

FastEthernet0/1

FastEthernet0/0

Port Status ☒ On

Bandwidth ☒ 100 Mbps ☐ 10 Mbps ☒ Auto

Duplex ☐ Half Duplex ☒ Full Duplex ☒ Auto

MAC Address 0001.43BD.AA01

IP Configuration

IPv4 Address 192.168.0.100

Subnet Mask 255.255.255.0

Tx Ring Limit 10

Router0

Physical **Config** CLI Attributes

GLOBAL

Settings

Algorithm Settings

ROUTING

Static

RIP

SWITCHING

VLAN Database

INTERFACE

FastEthernet0/0

FastEthernet0/1

FastEthernet0/1

Port Status ☒ On

Bandwidth ☒ 100 Mbps ☐ 10 Mbps ☒ Auto

Duplex ☐ Half Duplex ☒ Full Duplex ☒ Auto

MAC Address 0001.43BD.AA02

IP Configuration

IPv4 Address 100.10.10.1

Subnet Mask 255.0.0.0

Tx Ring Limit 10

Router1

Physical **Config** CLI Attributes

GLOBAL

Settings

Algorithm Settings

ROUTING

Static

RIP

SWITCHING

VLAN Database

INTERFACE

FastEthernet0/0

FastEthernet0/0

FastEthernet0/1

FastEthernet0/0

Port Status ☒ On

Bandwidth ☒ 100 Mbps ☐ 10 Mbps ☒ Auto

Duplex ☐ Half Duplex ☒ Full Duplex ☒ Auto

MAC Address 0090.0CD7.0901

IP Configuration

IPv4 Address 100.10.10.2

Subnet Mask 255.0.0.0

Tx Ring Limit 10

Настроил конфигурацию

```
Router(config-if)#
Router(config-if)#exit
Router(config)#ip route 0.0.0.0 0.0.0.0 100.10.10.2
Router(config)#int fa0/0
Router(config-if)#ip nat inside
Router(config-if)#int fa0/1
Router(config-if)#ip nat outside
Router(config-if)#exut
^
% Invalid input detected at '^' marker.

Router(config-if)#exit
Router(config)#ip nat inside source static 192.168.0.1 100.10.11.1
Router(config)#ip nat inside source static 192.168.0.1 100.10.11.2
Router(config)#
```

Пропинговал

```
Cisco Packet Tracer PC Command Line 1.0
C:\>ping 100.10.10.2

Pinging 100.10.10.2 with 32 bytes of data:

Request timed out.
Request timed out.
Reply from 100.10.10.2: bytes=32 time<1ms TTL=254
Reply from 100.10.10.2: bytes=32 time<1ms TTL=254

Ping statistics for 100.10.10.2:
    Packets: Sent = 4, Received = 2, Lost = 2 (50% loss),
Approximate round trip times in milli-seconds:
    Minimum = 0ms, Maximum = 0ms, Average = 0ms

C:\>
```

```
Router#show ip nat translations
Pro  Inside global      Inside local      Outside local      Outside global
---  100.10.11.1          192.168.0.1       ---                ---
---  100.10.11.2          192.168.0.1       ---                ---

Router#
```