


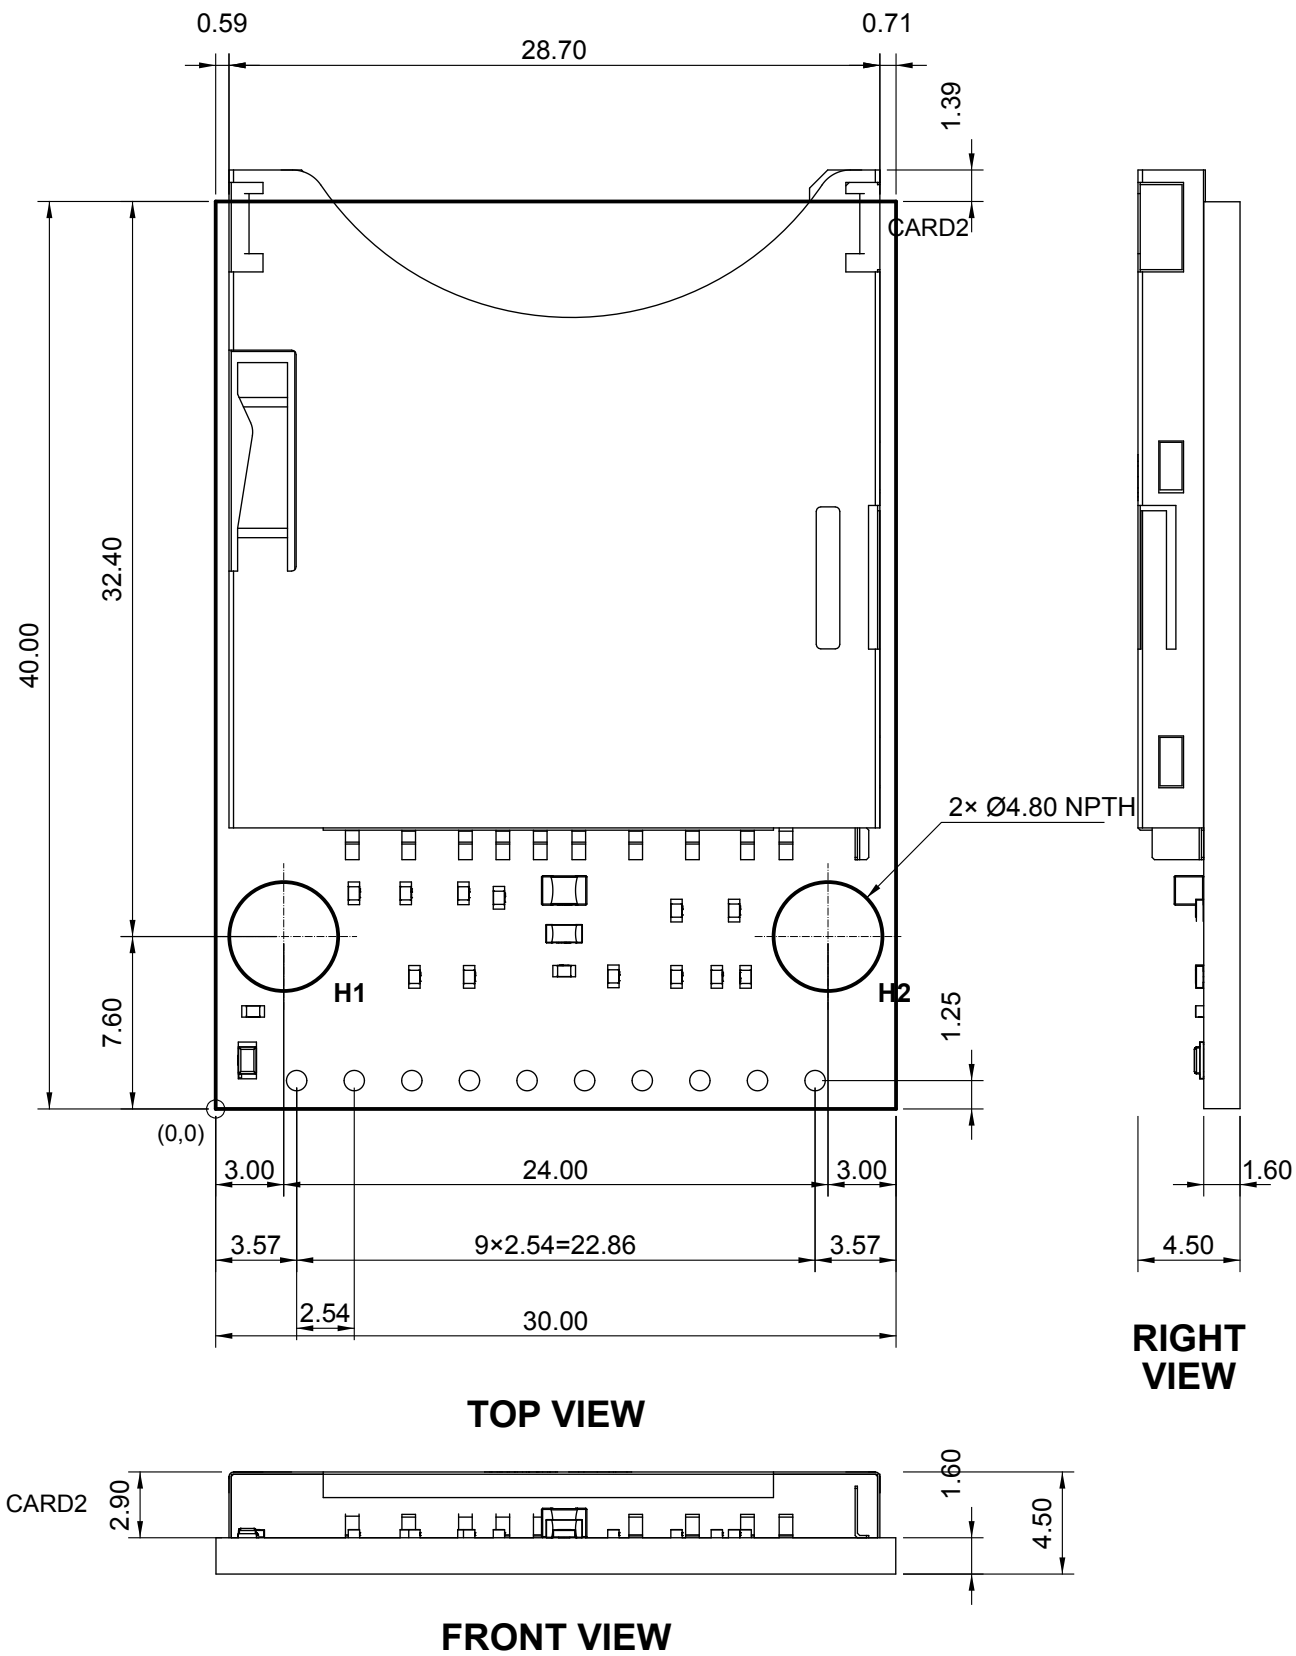

HOLE TABLE


ID	X	Y	Ø	TYPE	QTY
H1	3.00	7.60	4.80	NPTH, mounting	1
H2	27.00	7.60	4.80	NPTH, mounting	1
—	see dwg	see dwg	0.90	PTH, pin header	10
—	3.21	35.91	1.50	NPTH, part locating	1
—	27.41	35.91	1.50	NPTH, part locating	1
—	—	—	0.305	Via (not dimensioned)	17

COMPONENT HEIGHTS


REF	PACKAGE	QTY	BODY L×W	HEIGHT ABOVE PCB
CARD2	SD-SMD_SD-106M	1	30.40×28.70	2.90
C2	C0805_L2.0-W1.3-H1.3	1	2.00×1.30	1.30
C3	C0603_L1.6-W0.8-H0.8	1	1.60×0.80	0.80
LED1	LED0603-R-RD	1	1.62×0.81	0.41
R1-R14	R0402_L1.0-W0.5-H0.4	14	1.00×0.50	0.36

NOTES


1. All dimensions in mm. Origin (0,0) = bottom-left corner of the board outline.
2. Board outline and hole positions from Gerber fabrication data (2026-09-16).
3. Component bodies and heights from the STEP model, measured from the PCB top surface.
4. PCB thickness 1.60. Height 4.50 from PCB bottom to top of tallest part.
5. Tolerances per PCB manufacturer standard unless otherwise specified.

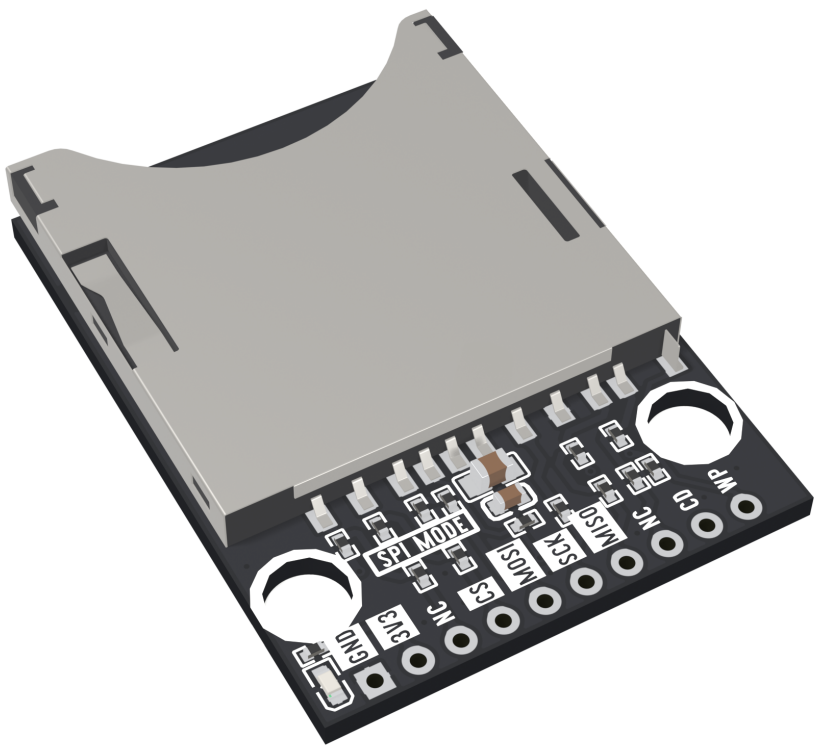

3D VIEW (REFERENCE)

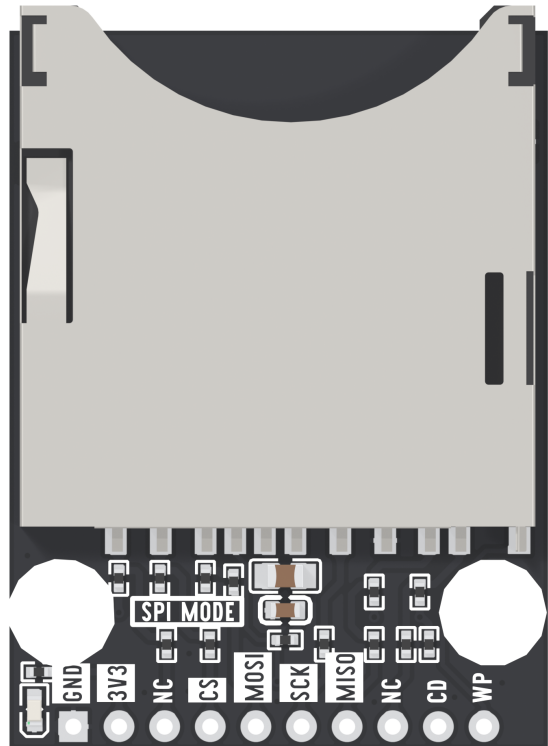

TOP (REFERENCE)

PRODUCT	TK104 SD Card Reader	SCALE	3:1	 THIRD ANGLE PROJECTION
TITLE	PCB MECHANICAL DRAWING	UNIT	mm	
COMPANY	Lonely Binary	DATE	2026-09-16	