


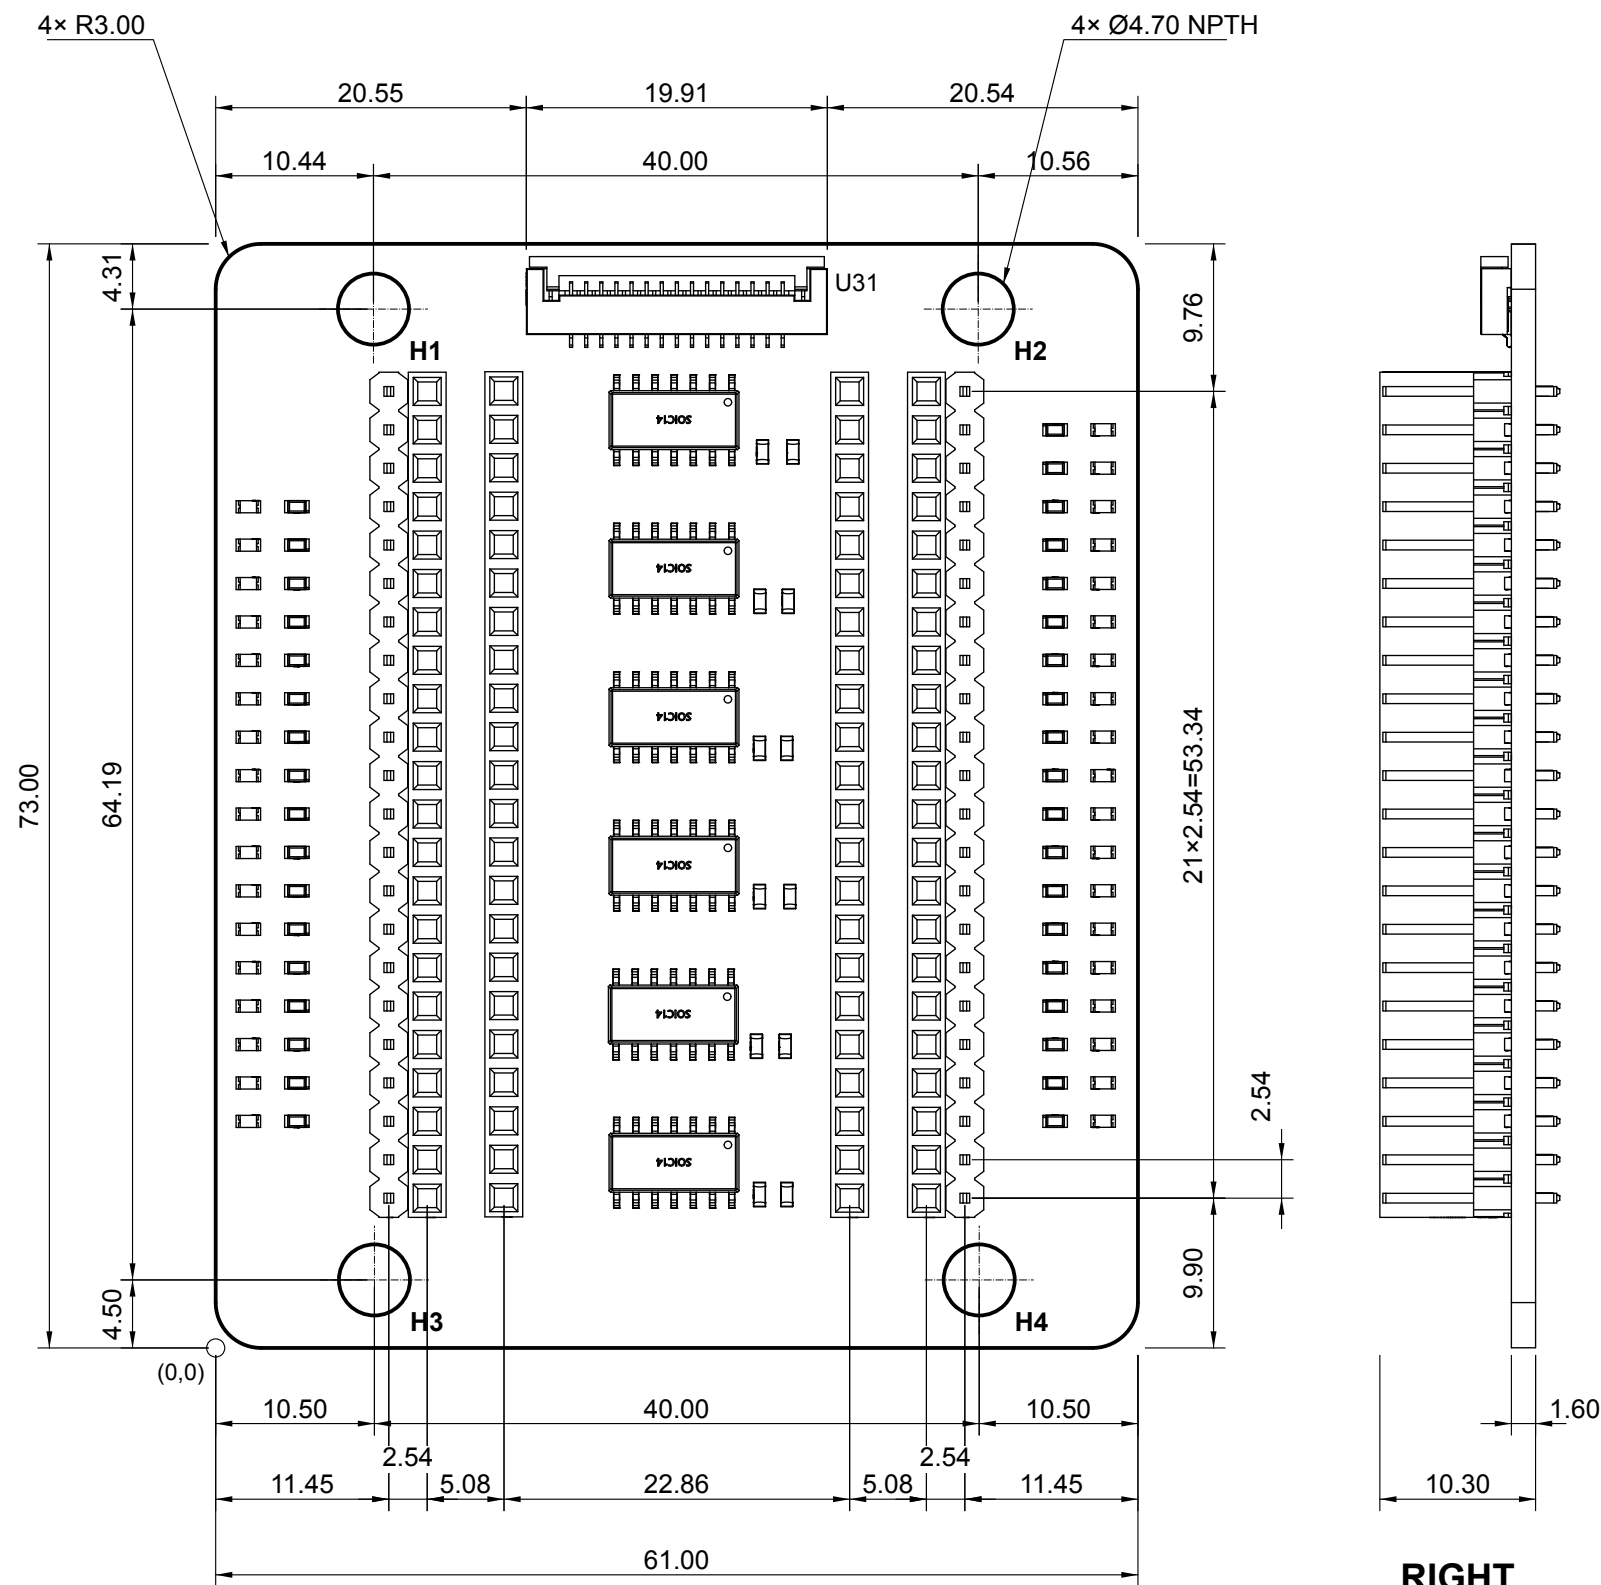

HOLE TABLE


ID	X	Y	Ø	TYPE	QTY
H1	10.44	68.69	4.70	NPTH, mounting	1
H2	50.44	68.69	4.70	NPTH, mounting	1
H3	10.50	4.50	4.70	NPTH, mounting	1
H4	50.50	4.50	4.70	NPTH, mounting	1
—	see dwg	see dwg	0.90	PTH, pin header	44
—	see dwg	see dwg	0.80	PTH, pin header	88
—	—	—	0.305	Via (not dimensioned)	88

COMPONENT HEIGHTS


REF	PACKAGE	QTY	BODY L×W	HEIGHT ABOVE PCB
H6, H7, U2, U4	HDR-TH_22P-P2.54-V-F	4	55.89×2.50	8.70
U19–U20	HDR-TH_22P-P2.54-M...	2	55.89×2.50	8.50
U31	FPC-SMD_15P-P1.00	1	19.91×6.00	2.02
U25–U30	SOIC-14	6	8.59×6.00	2.00
C1–C12	C0603_L1.6-W0.8-H0.8	12	1.60×0.80	0.80
R*	R0603	36	1.62×0.81	0.45
LED*	LED0603-R-RD	36	1.62×0.81	0.41

NOTES

1. All dimensions in mm. Origin (0,0) = bottom-left corner of the board outline.
2. Board outline and hole positions from Gerber fabrication data (2026-09-17).
3. Component bodies and heights from the STEP model, measured from the PCB top surface.
4. PCB thickness 1.60. Height 10.30 from PCB bottom to top of tallest part; pins protrude 1.60 below PCB.
5. Tolerances per PCB manufacturer standard unless otherwise specified.

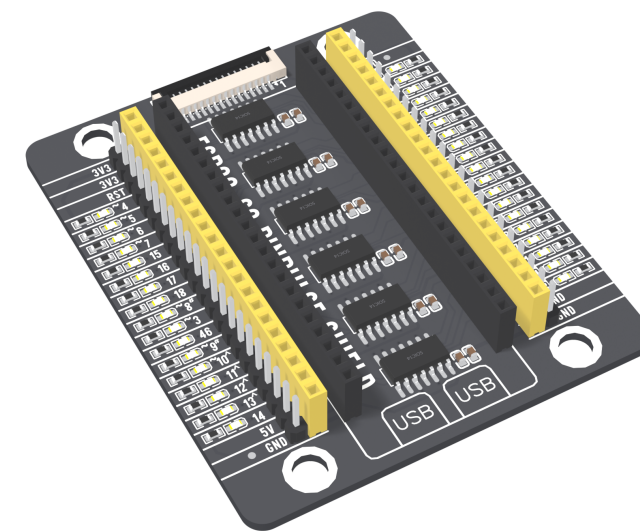

3D VIEW (REFERENCE)

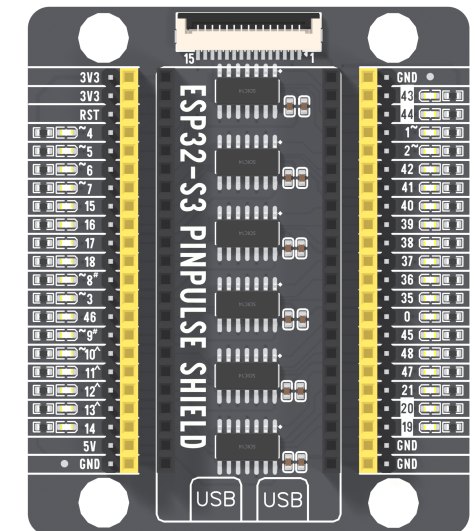


TOP (REFERENCE)

RIGHT
VIEW

TOP VIEW

FRONT VIEW

PRODUCT	ESP32-S3 PinPulse Shield	SCALE	2:1	 THIRD ANGLE PROJECTION
TITLE	PCB MECHANICAL DRAWING	UNIT	mm	
COMPANY	Lonely Binary	DATE	2026-09-17	