


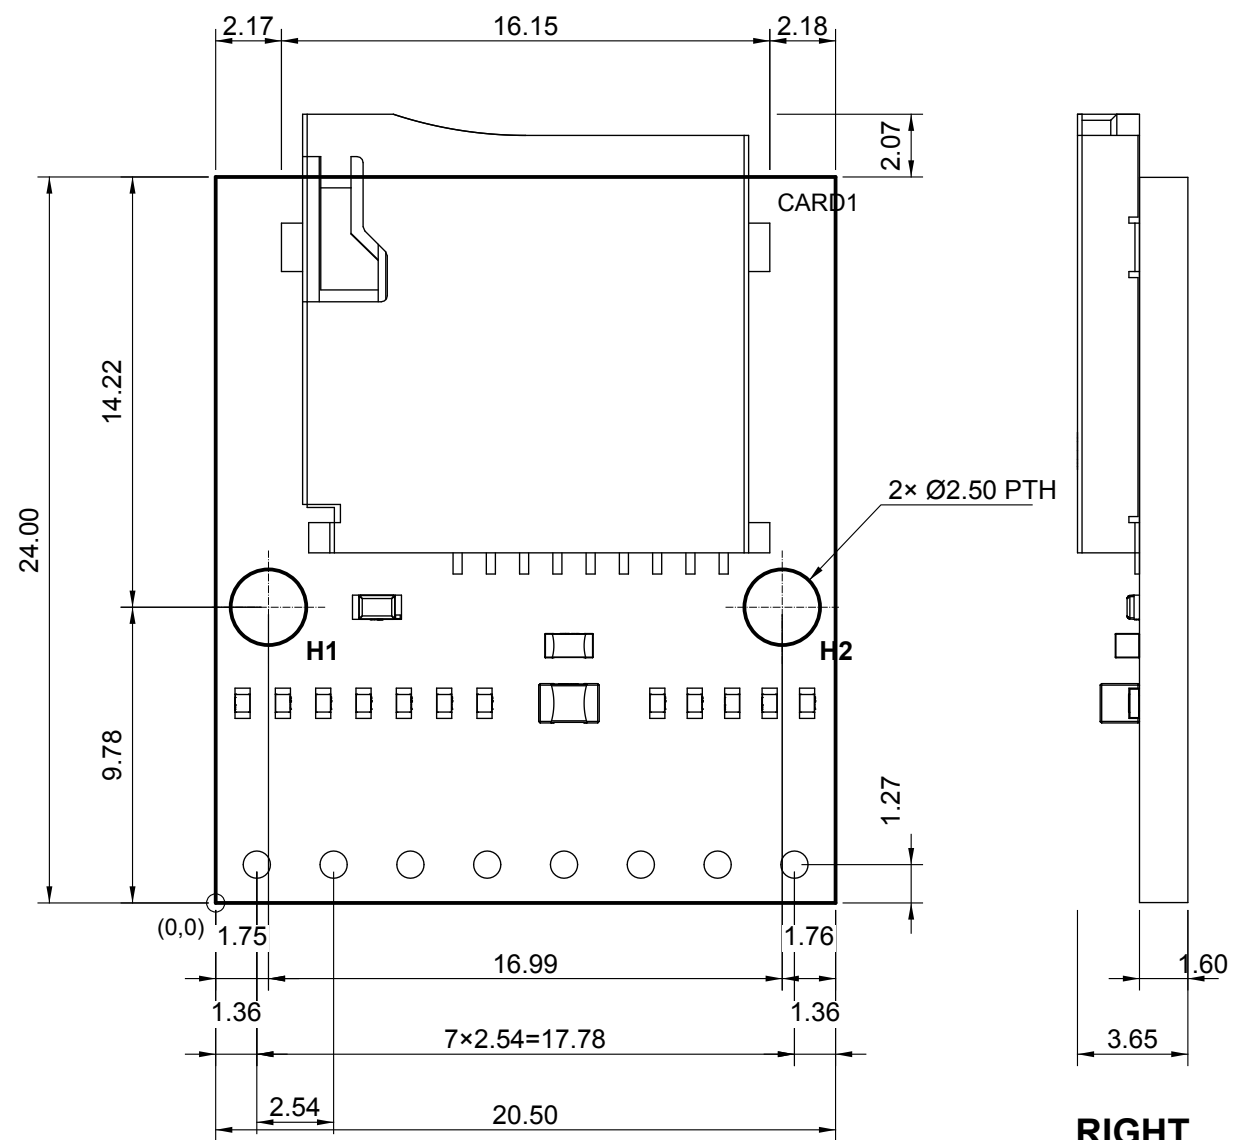

HOLE TABLE


ID	X	Y	Ø	TYPE	QTY
H1	1.75	9.78	2.50	PTH, mounting	1
H2	18.74	9.78	2.50	PTH, mounting	1
—	see dwg	see dwg	0.90	PTH, pin header	8
—	7.20	22.08	1.20	NPTH, part locating	1
—	15.20	22.08	1.20	NPTH, part locating	1
—	—	—	0.305	Via (not dimensioned)	14

COMPONENT HEIGHTS


REF	PACKAGE	QTY	BODY L×W	HEIGHT ABOVE PCB
CARD1	TF-SMD_TF-PUSH	1	16.15×15.20	2.05
C1	C0805_L2.0-W1.3-H1.3	1	2.00×1.30	1.30
C9	C0603_L1.6-W0.8-H0.8	1	1.60×0.80	0.80
LED1	LED0603-R-RD	1	1.62×0.81	0.41
R1-R12	R0402_L1.0-W0.5-H0.4	12	1.00×0.50	0.36

NOTES

1. All dimensions in mm. Origin (0,0) = bottom-left corner of the board outline.
2. Board outline and hole positions from Gerber fabrication data (2026-09-16).
3. Component bodies and heights from the STEP model, measured from the PCB top surface.
4. PCB thickness 1.60. Height 3.65 from PCB bottom to top of tallest part.
5. Tolerances per PCB manufacturer standard unless otherwise specified.

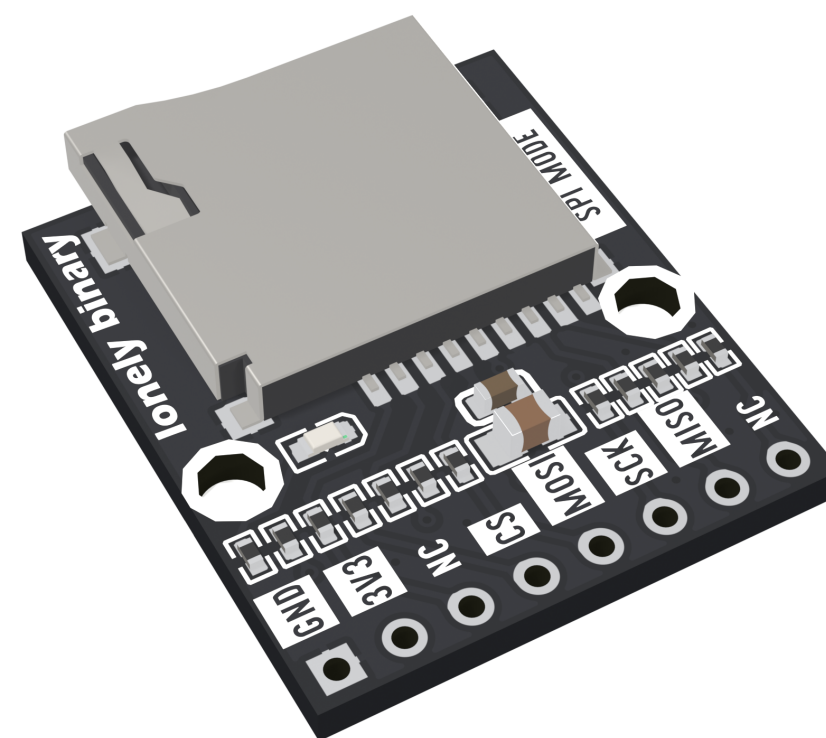

3D VIEW (REFERENCE)

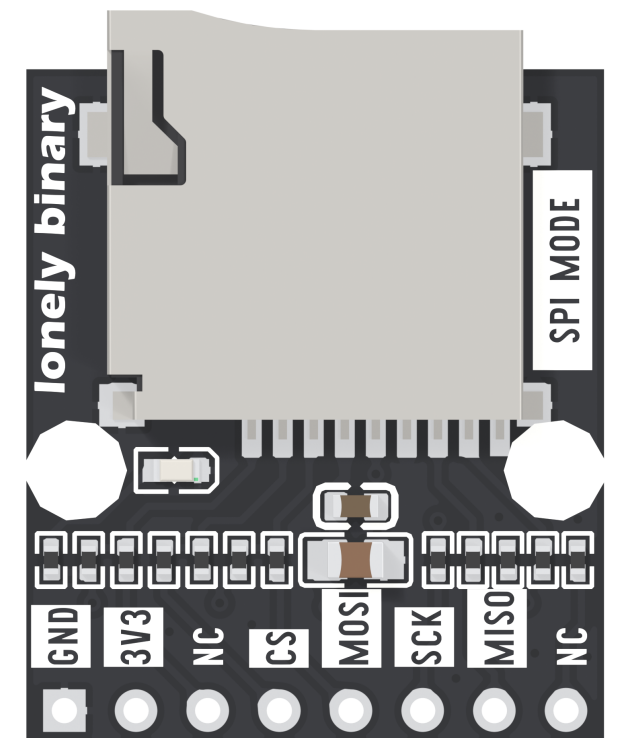

TOP (REFERENCE)

PRODUCT	TK104 MicroSD Card Reader	SCALE	4:1	 THIRD ANGLE PROJECTION
TITLE	PCB MECHANICAL DRAWING	UNIT	mm	
COMPANY	Lonely Binary	DATE	2026-09-16	