



LOCATING THE BURIED CABLE WITH GPR – LINES C1–C4

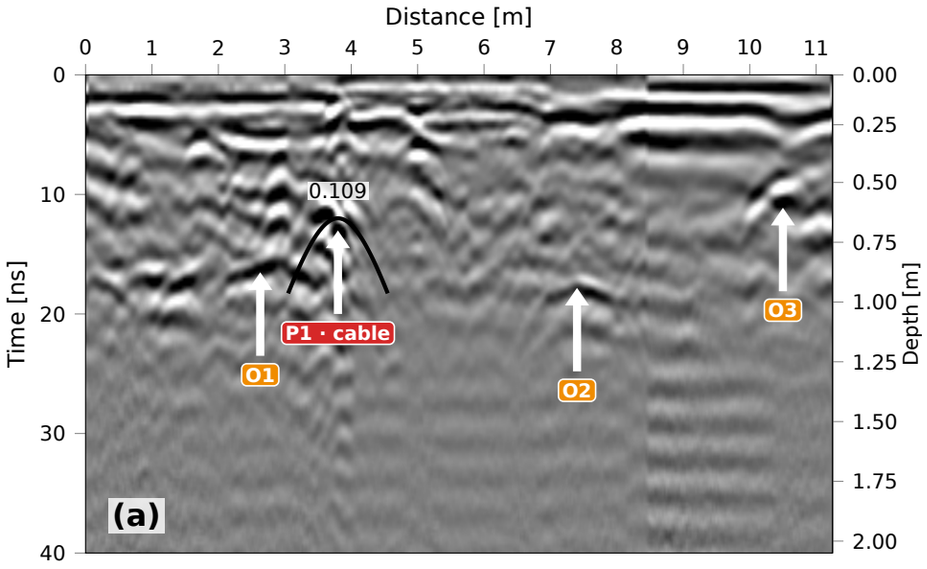

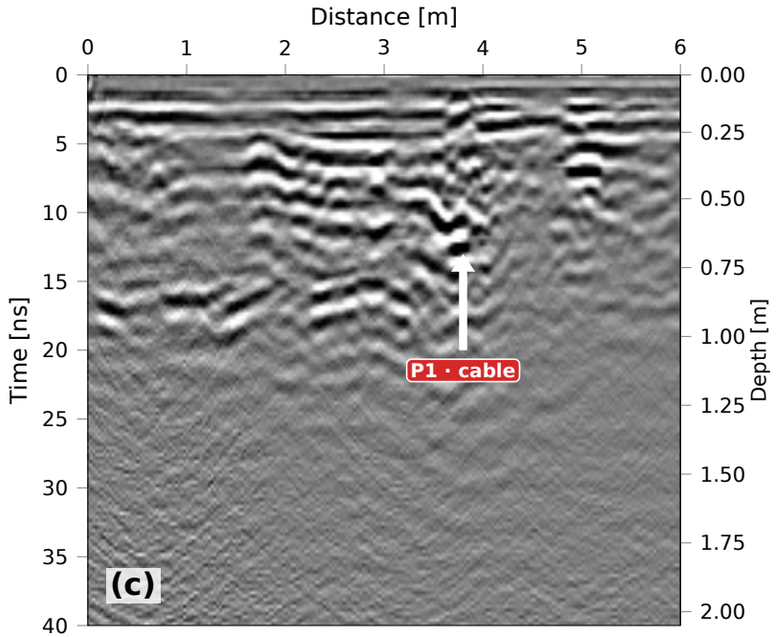


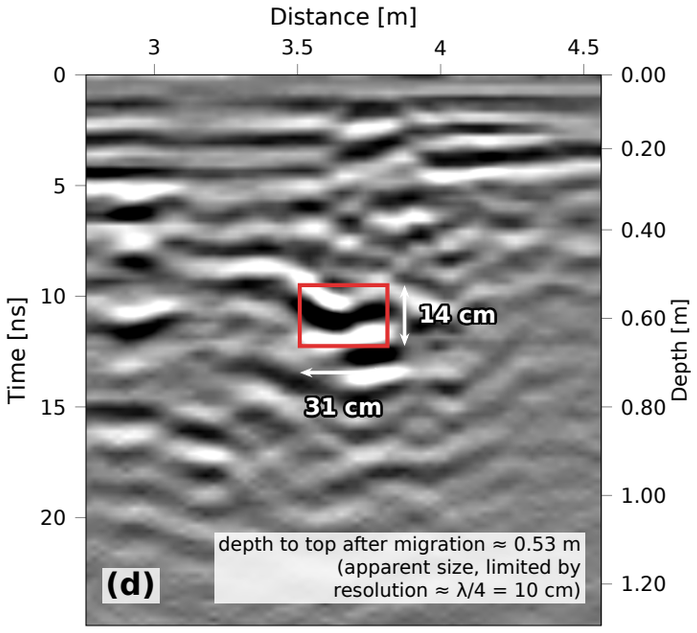

Line C1

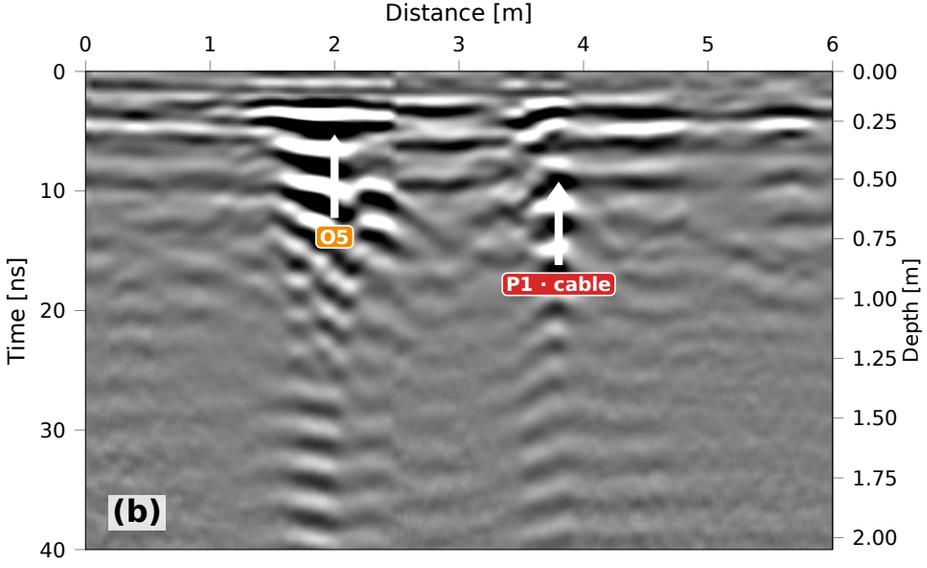


Line C3

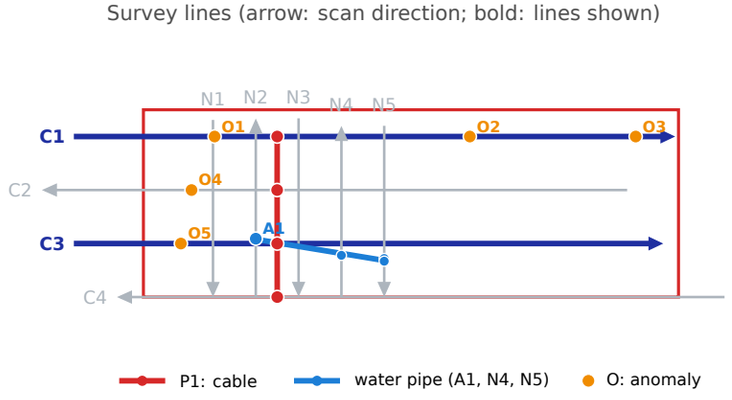



GPR sections over the cable
(a) Line C1; (b) Line C3;
(c) Line C1 after migration;
(d) Apparent size of the target

GPR IDS Detector Duo, 250 MHz channel; positions and classes from the team's picks; depth: concrete v = 0.12 m/ns (0–5 ns), soil v = 0.1 m/ns; C2, C4, N2, N4 scanned in reverse and flipped; (c), (d): Kirchhoff migration (v = 0.095) in ReflexW


LOCATING THE WATER PIPE WITH GPR – LINES N1–N5

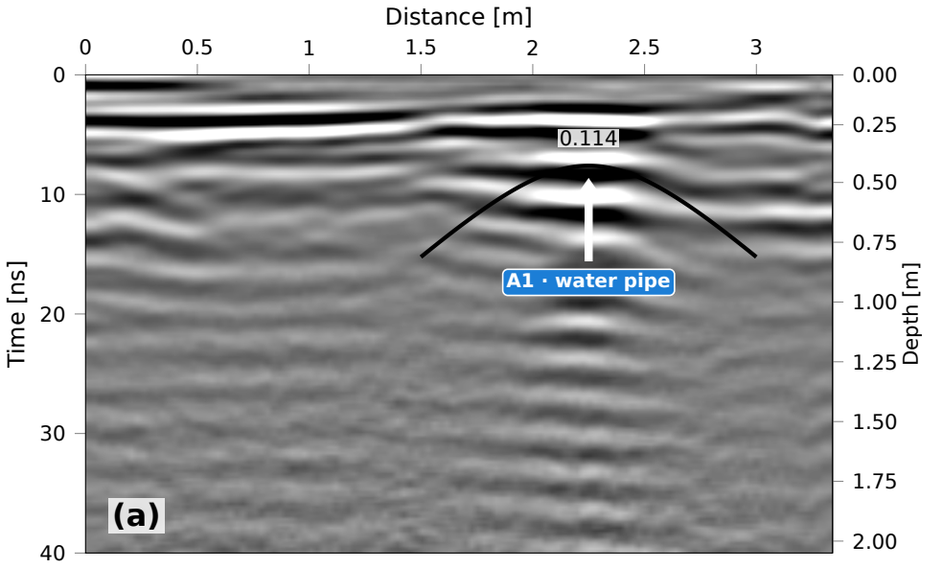

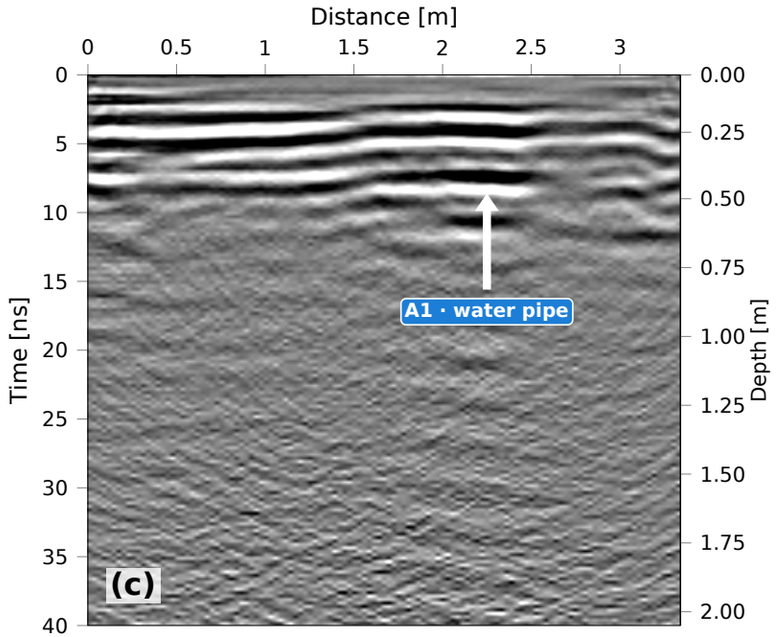


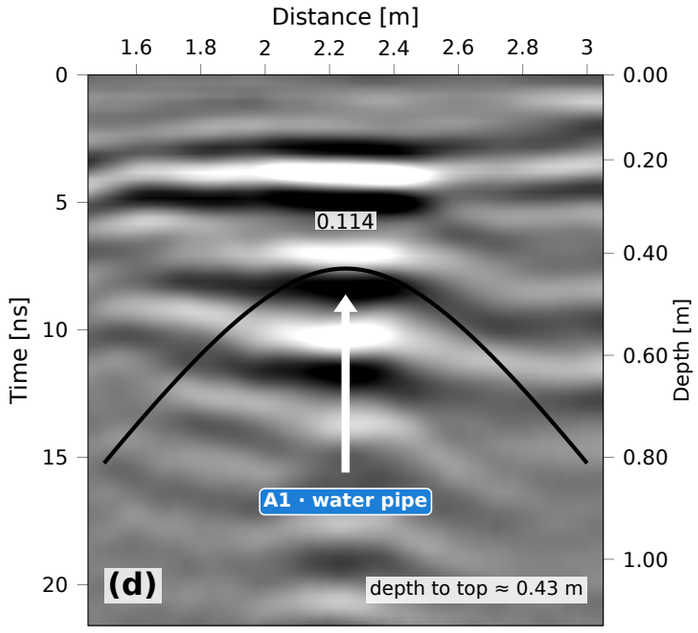

Line N2

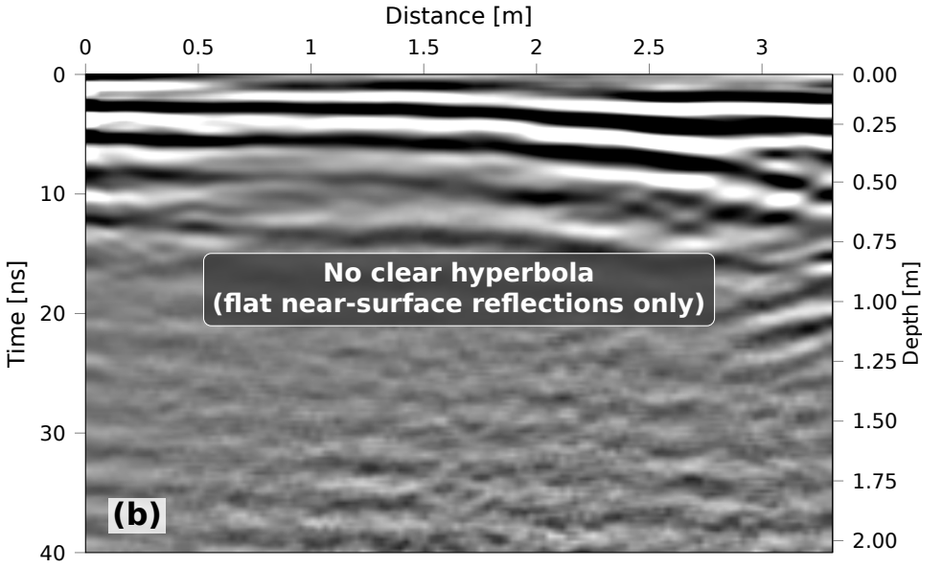


Line N1

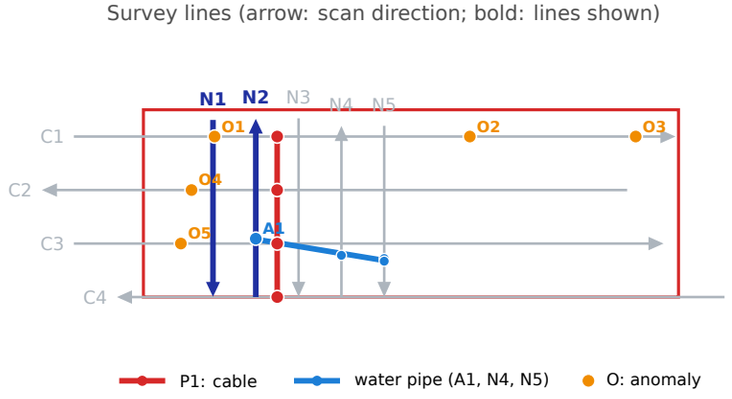


GPR sections over the water pipe
(a) Line N2; (b) Line N1;
(c) Line N2 after migration;
(d) Zoom on the pipe hyperbola

GPR IDS Detector Duo, 250 MHz channel; positions and classes from the team's picks; depth: concrete v = 0.12 m/ns (0–5 ns), soil v = 0.1 m/ns; C2, C4, N2, N4 scanned in reverse and flipped; (c): Kirchhoff migration (v = 0.095) in ReflexW


LOCATING THE CABLE – SIGNAL OF INTEREST ON LINE C1

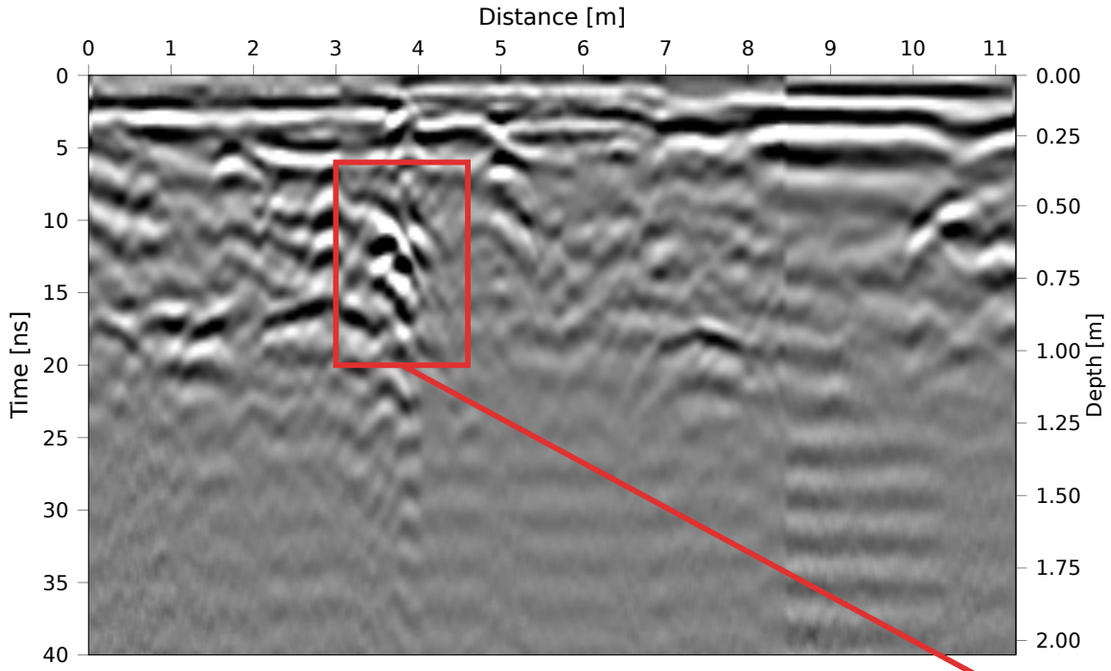

(a) Filtered data (dewow, background removal, gain)

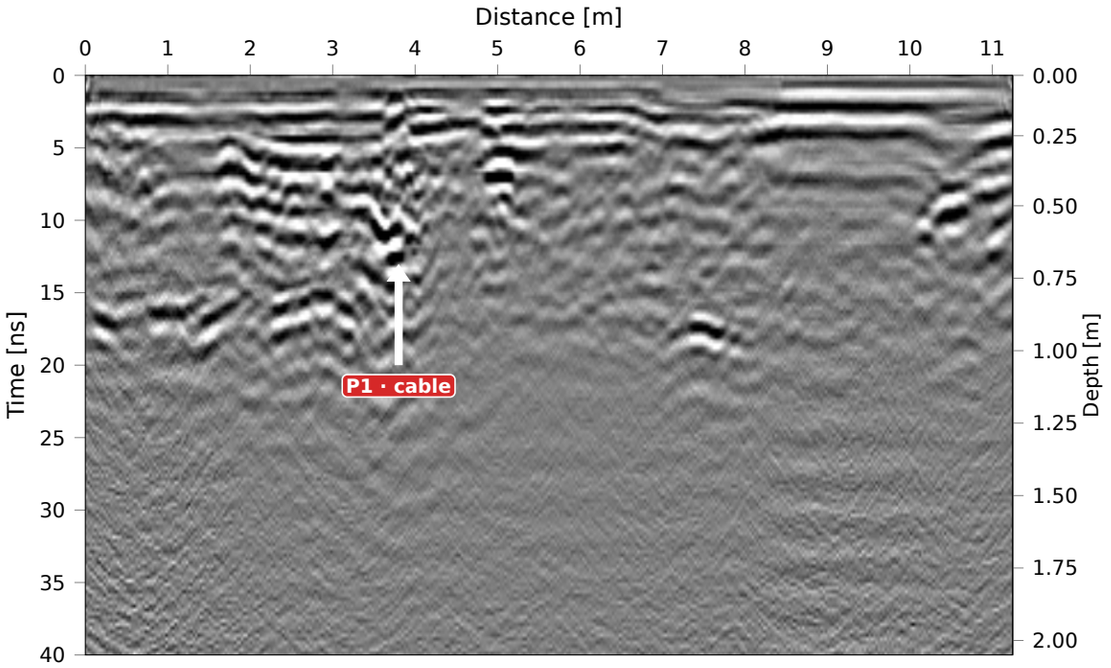

(b) After Kirchhoff migration

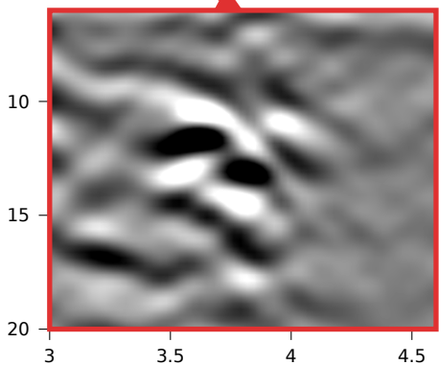

(c) Signal of interest

GPR section, line C1 – cable (P1) at x ≈ 3.8 m, depth to top ≈ 0.65 m

GPR IDS Detector Duo, 250 MHz channel; depth: concrete v = 0.12, soil v = 0.1 m/ns