


NT156WHM-N50 Preliminary Product Specification Rev. P0

HEFEI XINSHENG OPTOELECTRONICS TECHNOLOGY CO.,LTD



京东方 BOE		PRODUCT GROUP	REV	ISSUE DATE		
	BOE	TFT- LCD PRODUCT	P0	2014.11.12		
SPEC.	NUMBER	SPEC. TITLE		PAGE		
		NT156WHM-N50 Preliminary Product S	pecification	2 OF 36		
REVISION HISTORY						
REV.	ECN No.	DESCRIPTION OF CHANGES	DATE	PREPARED		
P0	-	Initial Release	2014.11.12	张言萍		
			*			
I						

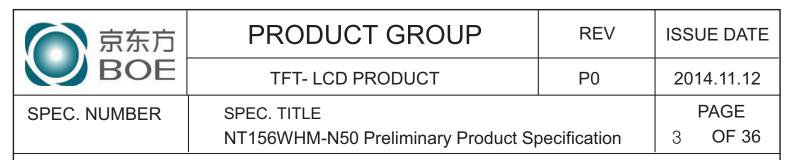

Contents

No.	Items	Page
	REVISION HISTORY	2
	CONTENTS	3
1.0	General Description	4
2.0	Absolute Maximum ratings	6
3.0	Electrical specifications.	7
4.0	Optical specifications.	10
5.0	Interface Connection	15
6.0	Signal Timing waveforms	19
7.0	Signal Timing waveforms of interface signal	21
8.0	Input signals, Basic display colors & gray scale of colors	23
9.0	Power sequence	24
10.0	Connector description	25
11.0	Mechanical Characteristics	26
12.0	Reliability Test	27
13.0	Handling & Cautions.	27
14.0	Label	28
15.0	Packing information	28
16.0	Mechanical Outline Dimension	31
17.0	EDID Table	33

京东方	PRODUCT GROUP	REV	ISSUE DATE
BOE	TFT- LCD PRODUCT	P0	2014.11.12
SPEC. NUMBER	SPEC. TITLE	PAGE	
	NT156WHM-N50 Preliminary Product Sp	4 OF 36	

1.0 GENERAL DESCRIPTION

1.1 Introduction

NT156WHM-N50 is a color active matrix TFT LCD module using amorphous silicon TFT's(Thin Film Transistors) as an active switching devices. This module has a 15.6 inch diagonally measured active area with HD resolutions (1366 horizontal by 768 vertical pixel array). Each pixel is divided into RED, GREEN, BLUE dots which are arranged in vertical Stripe and this module can display 262,144 colors. The TFT-LCD panel used for this module is a low reflection and higher color type. Therefore, this module is suitable for Notebook PC. The LED Driver for back-light driving is built in this model. All input signals are LVDS interface compatible.

LED Driver LVDS Rx **LVDS** LED Lighting Bar + Gate Drive Input Connector T/CON Signal TFT LCD Panel Mini-LVDS Tx 1366×768 **VDD** DC/DC Gamma Vcom Source Driver

1.2 Features

- 1 Channel LVDS Interface with 1 pixel / clock
- Thin and light weight
- 6-bit color depth, display 262K colors
- Single LED Lighting Bar. (Down side/Horizontal Direction)
- Data enable signal mode
- Up/Down Mounting Frame
- Green Product (RoHS & Halogen free product)
- On board LED Driving circuit
- Low driving voltage and low power consumption
- On board EDID chip



京东方	PRODUCT GROUP	REV	ISSUE DATE
BOE	TFT- LCD PRODUCT P0		2014.11.12
SPEC. NUMBER	SPEC. TITLE	PAGE	
	NT156WHM-N50 Preliminary Product Sp	5 OF 36	

1.3 Application

Notebook PC (Wide type)

1.4 General Specification

The followings are general specifications at the model NT156WHM-N50. (listed in Table 1.)

<Table 1. General Specifications>

Parameter	Specification	Unit	Remarks
- didinotoi	openious.	-	rtomarko
Active area	344.23(H) ×193.54(V)	mm	
Number of pixels	1366 (H) ×768 (V)	pixels	
Pixel pitch	0.252 (H) X 0.252 (V)	mm	
Pixel arrangement	RGB Vertical stripe		
Display colors	262K	colors	
Display mode	Normally White		
Dimensional outline	359.3(H)*209.5 (V) (W/PCB)*5.5(Max)	mm	
Weight	450 (max)	g	
Surface treatment	Glare		
Back-light	Lower Down side, 1-LED Lighting Bar type		Note 1
Power consumption	Pp : 1.2 (max)	W	
	P _{BL} :3.9(max)	W	
	Ptotal :5.1(max)	W	

Notes: 1. LED Lighting Bar (36*LED Array)

5



京东方	PRODUCT GROUP	REV	ISSUE DATE
BOE	TFT- LCD PRODUCT	P0	2014.11.12
SPEC. NUMBER	SPEC. TITLE	PAGE	
	NT156WHM-N50 Preliminary Product Sp	6 OF 36	

2.0 ABSOLUTE MAXIMUM RATINGS


The followings are maximum values which, if exceed, may cause faulty operation or damage to the unit. The operational and non-operational maximum voltage and current values are listed in Table 2.

< Table 2. Absolute Maximum Ratings>

Ta=25+/-2°C

Parameter	Symbol	Min.	Max.	Unit	Remarks
Power Supply Voltage	V _{DD}	-0.3	4.0	V	Note 1
Logic Supply Voltage	V _{IN}	V _{ss} -0.3	V _{DD} +0.3	V	Note i
Operating Temperature	T _{OP}	0	+50	$^{\circ}$	Note 2
Storage Temperature	T _{ST}	-20	+60	°C	Note 2

- Notes: 1. Permanent damage to the device may occur if maximum values are exceeded functional operation should be restricted to the condition described under normal operating conditions.
 - 2. Temperature and relative humidity range are shown in the figure below. 95 % RH Max. ($40 \, ^{\circ}\text{C} \ge \text{Ta}$) Maximum wet bulb temperature at 39 $^{\circ}\text{C}$ or less. (Ta > $40 \, ^{\circ}\text{C}$) No condensation.

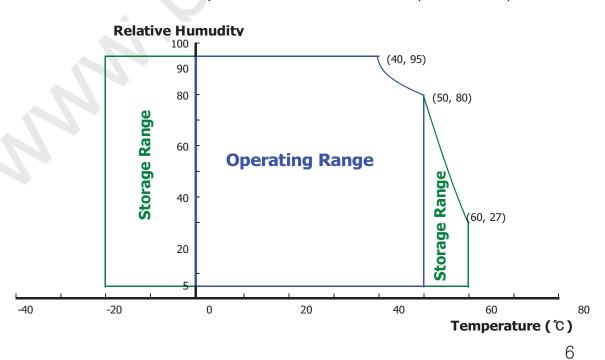



京东方	PRODUCT GROUP	REV	ISSUE DATE
BOE	TFT- LCD PRODUCT	P0	2014.11.12
SPEC. NUMBER	SPEC. TITLE	PAGE	
	NT156WHM-N50 Preliminary Product Sp	7 OF 36	

3.0 ELECTRICAL SPECIFICATIONS

3.1 Electrical Specifications

Global LCD Panel Exchange Center

< Table 3. Electrical specifications >

Ta=25+/-2°C

			•			
Parameter		Min.	Тур.	Max.	Unit	Remarks
Power Supply Voltage	V _{DD}	3.0	3.3	3.6	V	Note 1
Permissible Input Ripple Voltage	V _{RF}	-	-	100	mV	At V _{DD} = 3.3V
Power Supply Current	I _{DD}	-	300		mA	Note 1
Inrush Current	I _{inrush}	-	569	700	mA	
Differential Input Voltage	V _{ID}	100		600	mV	
	P _D	\-\-\-\-\-\-\-\-\-\-\-\-\-\-\-\-\-\-\-	0.9	1.2	W	Note 1
Power Consumption	P _{BL}	-	-	3.9	W	Note 2
	P _{total}	-	-	5.1	W	
LVDS Common Mode Voltage	V _{IC}	0.7	-	1.6	V	


Notes: 1. The supply voltage is measured and specified at the interface connector of LCM. The current draw and power consumption specified is for 3.3V at 25°C.


a) Typ: Mosaic Pattern

b) Max : Skip sub pixel255

2. Calculated value for reference (VLED imes ILED)

□ Inrush current测试方法

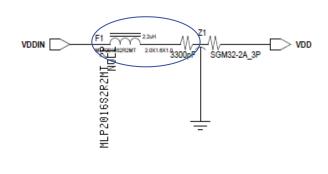

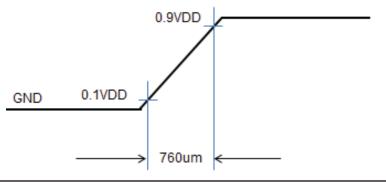



京东方	PRODUCT GROUP	REV	ISSUE DATE
BOE	TFT- LCD PRODUCT P0		2014.11.12
SPEC. NUMBER	SPEC. TITLE NT156WHM-N50 Preliminary Product Specification		PAGE 8 OF 36
	in i roovenivi-inou Preliminary Product Sp		

3.2 Backlight Unit

< Table 4. LED Driving guideline specifications >

Ta=25+/-2°C

	Table 4. LED Driving guideline specifications > 10 25 4, 2 5 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1						
	Parameter		Min.	Тур.	Max.	Unit	Remarks
LED Forward	l Voltage	V _F	-	-	3.4	V	-
LED Forward	Current	I _F	-	18.2	-	mA	-
LED Power C	Consumption	P _{LED}		-	3.9	W	Note 1
LED Life-Tim	е	N/A	15,000	-	-	Hour	I _F = 20mA
Power supply LED Driver	/ voltage for	V _{LED}	5	12	21	V	
LED Power II	nput Current	I _{LED IN}	-	192	-	mA	
LVDS Comm Voltage	LVDS Common Mode Voltage		0.7	1.2	1.6	V	
Maximum deviation of input clock frequency during SSC		FDEV	~2	±3%	-		
Maximum moncy of input of SSC	odulation freque clock during	FMOD	10	-	300	KHZ	
EN Control	Backlight on	2	2.5		5.0	V	
Level	Backlight off		0		1.0	V	
PWM	PWM High Level		2.5		5.0	V	
Control Level	PWM Low Level		0		0.1	V	
PWM Control Frequency		F _{PWM}	100	-	10,000	Hz	
Duty Ratio		-	1	-	100	%	Note3

Notes: 1. Power supply voltage 12V for LED Driver


Calculator Value for reference IF \times VF \times 54/ efficiency = PLED

- 2. The LED Life-time define as the estimated time to 50% degradation of initial luminous.
- 3. 1% duty cycle is achievable with a dimming frequency less than 1KHz. 8



京东方	PRODUCT GROUP	REV	ISSUE DATE		
BOE	TFT- LCD PRODUCT	TFT- LCD PRODUCT P0			
SPEC. NUMBER SPEC. TITLE			PAGE		
NT156WHM-N50 Preliminary Product Specification		9 OF 36			

3.3 LED structure

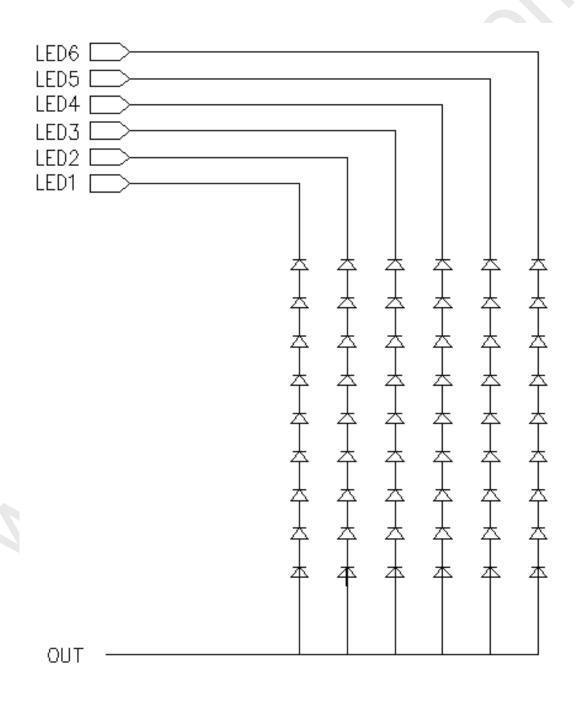



京东方	PRODUCT GROUP	REV	ISSUE DATE
BOE	TFT- LCD PRODUCT	P0	2014.11.12
SPEC. NUMBER	SPEC. TITLE		PAGE
	NT156WHM-N50 Preliminary Product Sp	10 OF 36	

4.0 OPTICAL SPECIFICATION

4.1 Overview

The test of Optical specifications shall be measured in a dark room (ambient luminance ≤ 1 lux and temperature = $25\pm2^{\circ}$ C) with the equipment of Luminance meter system (Goniometer system and TOPCON BM-5) and test unit shall be located at an approximate distance 50cm from the LCD surface at a viewing angle of θ and Φ equal to θ 0°. We refer to θ 0=0 (= θ 3) as the 3 o'clock direction (the "right"), θ 0=90 (= θ 12) as the 12 o'clock direction ("upward"), θ 0=180 (= θ 9) as the 9 o'clock direction ("left") and θ 0=270(= θ 6) as the 6 o'clock direction ("bottom"). While scanning θ and/or θ 0, the center of the measuring spot on the Display surface shall stay fixed. The backlight should be operating for 30 minutes prior to measurement. VDD shall be 3.3+/- 0.3V at 25°C. Optimum viewing angle direction is 6 'clock.

4.2 Optical Specifications

<Table 5. Optical Specifications>

Table 9. Optical opecinications								
Parameter		Symbol	Condition	Min.	Typ.	Max.	Unit	Remark
	Harizantal	Θ_3		-	45	-	Deg.	
Viewing Angle	Horizontal	Θ_9	CR > 10	-	45	-	Deg.	Note 1
range	Vertical	Θ_{12}	CK > 10	-	20	-	Deg.	Note
	v e rticar	Θ_6		-	40	-	Deg.	
Luminance Co	ntrast ratio	CR	Θ = 0°	-	500			Note 2
Luminance of White	5 Points	Y _w	Θ = 0°	187	220	-	cd/m ²	Note 3
White	5 Points	ΔΥ5	ILED = 20mA	80	-	-		, , , ,
Luminance uniformity	13 Points	ΔΥ13		65	-	-		Note 4
White Chro	maticity	X _w	Θ = 0°	0.283	0.313	0.343		Note 5
vville Cillo	maticity	y _w	0 = 0	0.299	0.329	0.359	Note 5	
	Red -	X _R			TBD]
		y _R			TBD			.
Reproduction		X _G	Θ = 0°	-0.03	TBD	+0.03		
of color		y _G		-0.03	TBD	10.00		
	Blue	X _B			TBD			
	Біас	y _B			TBD			
Gamut					45		%	
Response Time (Rising + Falling)		T _{RT}	Ta= 25° C Θ = 0°	-	12	-	ms	Note 6
Cross T	alk	CT	Θ = 0°	-	-	2.0	%	Note 7

10



京东方	PRODUCT GROUP	REV	ISSUE DATE
BOE	TFT- LCD PRODUCT P0		2014.11.12
SPEC. NUMBER	SPEC. TITLE		PAGE
	NT156WHM-N50 Preliminary Product Sp	11 OF 36	

Notes:

- 1. Viewing angle is the angle at which the contrast ratio is greater than 10. The viewing angles are determined for the horizontal or 3, 9 o'clock direction and the vertical or 6, 12 o'clock direction with respect to the optical axis which is normal to the LCD surface (see FIGURE 1).
- 2. Contrast measurements shall be made at viewing angle of Θ = 0 and at the center of the LCD surface. Luminance shall be measured with all pixels in the view field set first to white, then to the dark (black) state. (see FIGURE 1) Luminance Contrast Ratio (CR) is defined mathematically.


- 3. Center Luminance of white is defined as luminance values of 5 point average across the LCD surface. Luminance shall be measured with all pixels in the view field set first to white. This measurement shall be taken at the locations shown in FIGURE 2 for a total of the measurements per display.
- 4. The White luminance uniformity on LCD surface is then expressed as : ΔY =Minimum Luminance of 5(or 13) points / Maximum Luminance of 5(or 13) points. (see FIGURE 2 and FIGURE 3).
- 5. The color chromaticity coordinates specified in Table 5 shall be calculated from the spectral data measured with all pixels first in red, green, blue and white. Measurements shall be made at the center of the panel.
- 6. The electro-optical response time measurements shall be made as FIGURE 4 by switching the "data" input signal ON and OFF. The times needed for the luminance to change from 10% to 90% is Tr, and 90% to 10% is Td.
- 7. Cross-Talk of one area of the LCD surface by another shall be measured by comparing the luminance (YA) of a 25mm diameter area, with all display pixels set to a gray level, to the luminance (YB) of that same area when any adjacent area is driven dark. (See FIGURE 5).

京东方	PRODUCT GROUP	REV	ISSUE DATE
BOE	TFT- LCD PRODUCT P0		2014.11.12
SPEC. NUMBER	SPEC. TITLE		PAGE
	NT156WHM-N50 Preliminary Product Sp	12 OF 36	

4.3 Optical measurements


Global LCD Panel Exchange Center

Figure 1. Measurement Set Up

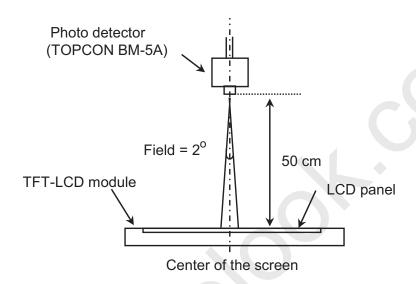

Optical characteristics measurement setup

Figure 2. White Luminance and Uniformity Measurement Locations (5 points)

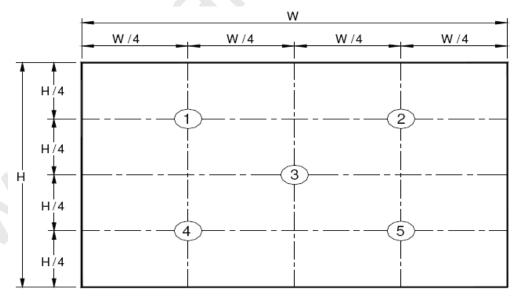


Center Luminance of white is defined as luminance values of center 5 points across the LCD surface. Luminance shall be measured with all pixels in the view field set first to white. This measurement shall be taken at the locations shown in FIGURE 2 for a total of the measurements per display.

Global LCD Panel Exchange Center




京东方	PRODUCT GROUP	REV	ISSUE DATE
BOE	TFT- LCD PRODUCT P0		2014.11.12
SPEC. NUMBER	SPEC. TITLE		PAGE
	NT156WHM-N50 Preliminary Product Sp	13 OF 36	

Figure 3. Uniformity Measurement Locations (13 points)

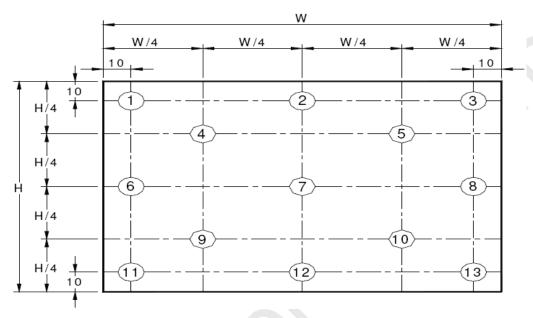

The White luminance uniformity on LCD surface is then expressed as : $\Delta Y5 =$ Minimum Luminance of five points / Maximum Luminance of five points (see FIGURE 2), ΔY13 = Minimum Luminance of 13 points /Maximum Luminance of 13 points (see FIGURE 3).

Figure 4. Response Time Testing

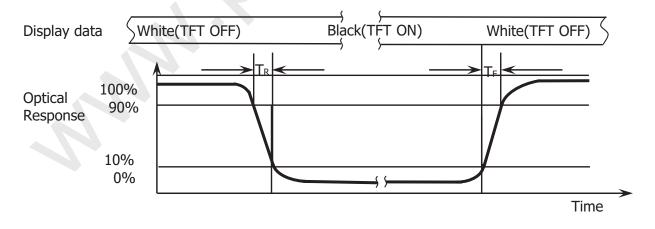


The electro-optical response time measurements shall be made as shown in FIGURE 4 by switching the "data" input signal ON and OFF. The times needed for the luminance to change from 10% to 90% is Td and 90% to 10% is Tr.

Global LCD Panel Exchange Center

京东方	PRODUCT GROUP	REV	ISSUE DATE
BOE	TFT- LCD PRODUCT P0		2014.11.12
SPEC. NUMBER	SPEC. TITLE		PAGE
	NT156WHM-N50 Preliminary Product Sp	14 OF 36	

Figure 5. Cross Modulation Test Description

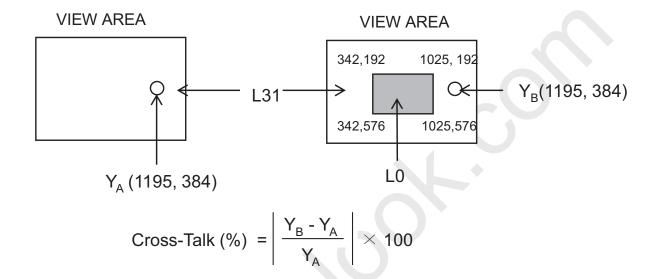

Where:

 Y_A = Initial luminance of measured area (cd/m²)

Y_B = Subsequent luminance of measured area (cd/m²)

The location measured will be exactly the same in both patterns

Cross-Talk of one area of the LCD surface by another shall be measured by comparing the luminance (YA) of a 25mm diameter area, with all display pixels set to a gray level, to the luminance (YB) of that same area when any adjacent area is driven dark (Refer to FIGURE 5).



京东方	PRODUCT GROUP	REV	ISSUE DATE
BOE	TFT- LCD PRODUCT	P0	2014.11.12
SPEC. NUMBER	SPEC. TITLE		PAGE
	NT156WHM-N50 Preliminary Product Sp	15 OF 36	

5.0 INTERFACE CONNECTION.

5.1 Electrical Interface Connection

The electronics interface connector is STM MSAK24025P40G or Compatible.


The connector interface pin assignments are listed in Table 6.

<Table 6. Pin Assignments for the Interface Connector>

Terminal	Symbol	Functions
Pin No.	Symbol	Description
1	NC	No Connection
2	VDDIN	Power Supply, 3.3V (typ.)
3	VDDIN	Power Supply, 3.3V (typ.)
4	VDC	VDC 3.3Vpower for EDID
5	NC	No Connection
6	CLK EDID	EDID Clock
7	Data EDID	EDID Data
8	RxIN0-	Transmission Data of 0 Negative -
9	RxIN0+	Transmission Data of 0 Positive +
10	GND	Ground
11	RxIN1-	Transmission Data of 1 Negative -
12	RxIN1+	Transmission Data of 1 Positive +
13	GND	Ground
14	RxIN2-	Transmission Data of 2 Negative -
15	RxIN2+	Transmission Data of 2 Positive +
16	GND	Ground
17	RxCLKIN-	Sampling Clock of Negative -
18	RxCLKIN+	Sampling Clock of Positive +
19	NC	No Connection
20	NC	No Connection
21	NC	No Connection
22	GND	Ground
23	NC	No Connection
24	NC	No Connection
25	GND	Ground
26	(CE)	No Connection
27	(CTL)	No Connection
28	GND	Ground
29	NC	No Connection
30	NC	No Connection

15




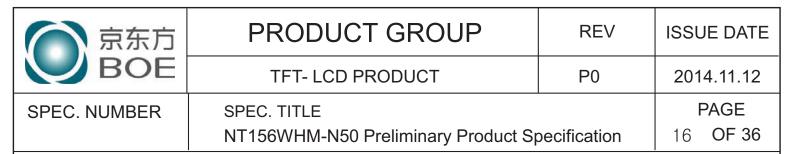


Terminal	Symbol	Functions		
Pin No.	Symbol	Description		
31	VLED_GND	LED Ground		
32	VLED_GND	LED Ground		
33	VLED_GND	LED Ground		
34	NC	No Connection		
35	PWM	System PWM Signal Input		
36	LED_EN	LED enable pin(+3.3V Input)		
37	NC	No Connection		
38	VLED	LED Power Supply 6V-21V		
39	VLED	LED Power Supply 6V-21V		
40	VLED	LED Power Supply 6V-21V		

16



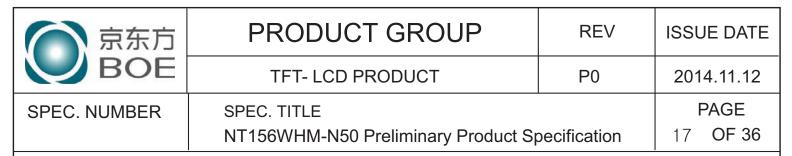


5.2 LVDS Interface

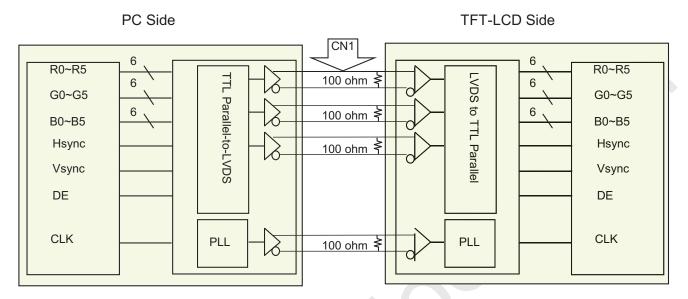

Note. Transmitter: Thine THC63LVDM63A or equivalent.

Transmitter is not contained in Module.

5.3.1LVDS Input signal

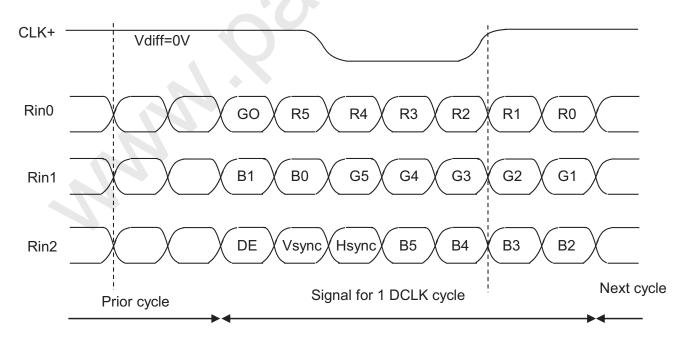

Note. Pin connection in case of using Thine THC63LVDM63A

17




京东方	PRODUCT GROUP	REV	ISSUE DATE
BOE	TFT- LCD PRODUCT P		2014.11.12
SPEC. NUMBER	SPEC. TITLE		PAGE
	NT156WHM-N50 Preliminary Product Sp	18 OF 36	

5.3.2 Data Input Format

Global LCD Panel Exchange Center

<Table 6. Pin Assignments for the BLU & LCM Connector>

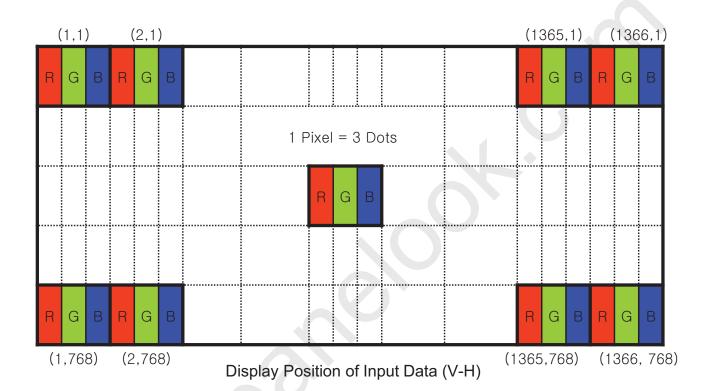


5.4 Back-light & LCM Interface Connection

Interface Connector: CRT 098-10W10AO or Equivalent

<Table 7. Pin Assignments for the BLU & LCM Connector>

Pin No.	Symbol	Description	Pin No.	Symbol	Description
1	LED1	LED cathode connection	6	LED6	LED cathode connection
2	LED2	LED cathode connection	7	NC	No Connection
3	LED3	LED cathode connection	8	Vout	LED anode connection
4	LED4	LED cathode connection	9	Vout	LED anode connection
5	LED5	LED cathode connection	10	Vout	LED anode connection

18

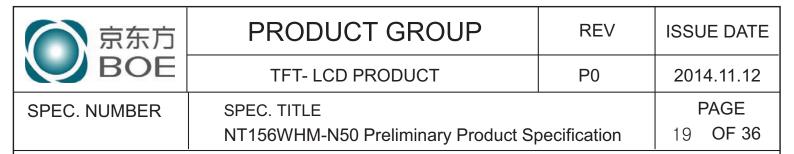

6.0 SIGNAL TIMING SPECIFICATION

6.1 The NT156WHM-N50 is operated by the DE only.

Item		Symbols	Min	Тур	Max	Unit
	Frequency	1/Tc	67.5	72.3	76.3	MHz
Clock	High Time	Tch	-	4/7	-	Tc
	Low Time	Tcl	-	3/7	-	Tc
	Frame Period		778	790	802	lines
Fra			-	60	1	Hz
			-	16.7	1	ms
Vertical Display Period		Tvd	768	768	768	lines
One line Scanning Period		Th	1446	1526	1586	clocks
Horizontal Display Period		Thd	1366	1366	1366	clocks

Note*: This Module can support low frame refresh rate 50Hz & 40Hz.




6.2 LVDS Rx Interface Timing Parameter

The specification of the LVDS Rx interface timing parameter is shown in Table 8.

<Table 8. LVDS Rx Interface Timing Specification>

Item	Symbol	Min	Тур	Max	Unit	Remark
CLKIN Period	tRCIP	-	13.83	25	nsec	
CLK Difference	tCdiff	-tRCIP*(3/7)	0	+tRCIP*(3/7)	nsec	
Input Data 0	tRIP1	-0.4	0.0	+0.4	nsec	
Input Data 1	tRIP0	tRICP/7-0.4	tRICP/7	tRICP/7+0.4	nsec	
Input Data 2	tRIP6	2 ×tRICP/7-0.4	2 ×tRICP/7	$2 \times tRICP/7+0.4$	nsec	
Input Data 3	tRIP5	3 ×tRICP/7-0.4	3 ×tRICP/7	3 ×tRICP/7+0.4	nsec	
Input Data 4	tRIP4	4 ×tRICP/7-0.4	4 ×tRICP/7	$4 \times tRICP/7 + 0.4$	nsec	
Input Data 5	tRIP3	5 ×tRICP/7-0.4	5 × tRICP/7	5 ×tRICP/7+0.4	nsec	
Input Data 6	tRIP2	6 ×tRICP/7-0.4	6 ×tRICP/7	$6 \times \text{tRICP/7+0.4}$	nsec	

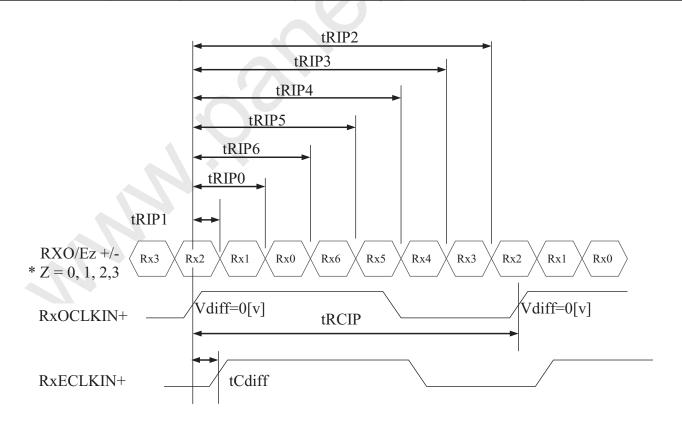

* Vdiff = (RXO/Ez+)-(RXO/Ez-), ..., (RXO/ECLK+)-(RXO/ECLK-)

20

A4(210 X 297) R2010-6053-O(3/3)




京东方	PRODUCT GROUP	REV	ISSUE DATE
BOE	TFT- LCD PRODUCT	P0	2014.11.12
SPEC. NUMBER	SPEC. TITLE		PAGE
	NT156WHM-N50 Preliminary Product Sp	21 OF 36	

7.0 SIGNAL TIMING WAVEFORMS OF INTERFACE SIGNAL


7.1 Sync Timing Waveforms

Global LCD Panel Exchange Center

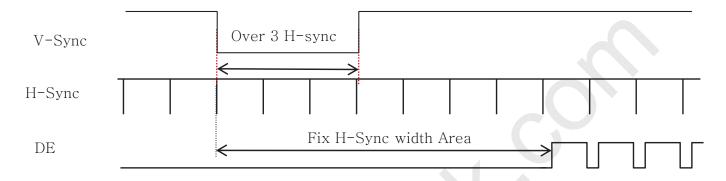

- 1) Need over 3 H-sync during V-Sync Low
- 2) Fix H-Sync width from V-Sync falling edge to first rising edge


7.2 Vertical Timing Waveforms

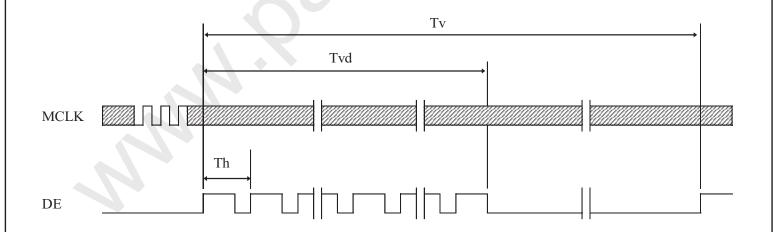





京东方	PRODUCT GROUP	REV	ISSUE DATE
BOE	TFT- LCD PRODUCT	P0	2014.11.12
SPEC. NUMBER	SPEC. TITLE		PAGE
	NT156WHM-N50 Preliminary Product Sp	pecification	22 OF 36

7.3 Horizontal Timing Waveforms

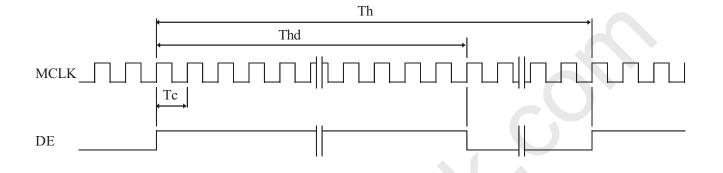

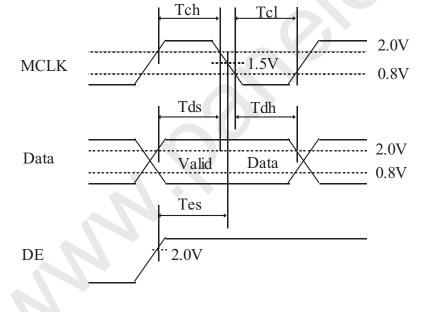

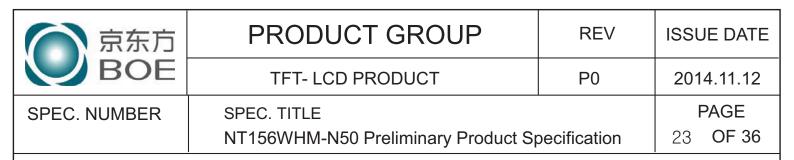

8.0 INPUT SIGNALS, BASIC DISPLAY COLORS & GRAY SCALE OF COLORS

	Colors &		Data signal								
	Gray scale	R0 R1 R2 R3 R4 R5	G0 G1 G2 G3 G4 G5	B0 B1 B2 B3 B4 B5							
	Black	0 0 0 0 0 0	0 0 0 0 0 0	0 0 0 0 0 0							
	Blue	0 0 0 0 0 0	0 0 0 0 0 0	1 1 1 1 1 1							
Basic	Green	0 0 0 0 0 0	1 1 1 1 1 1	0 0 0 0 0 0							
colors	Light Blue	0 0 0 0 0 0	1 1 1 1 1 1	1 1 1 1 1 1							
	Red	1 1 1 1 1 1	0 0 0 0 0 0	0 0 0 0 0 0							
	Purple	1 1 1 1 1 1	0 0 0 0 0 0	1 1 1 1 1 1							
	Yellow	1 1 1 1 1 1	1 1 1 1 1 1	0 0 0 0 0 0							
	White	1 1 1 1 1 1	1 1 1 1 1 1	1 1 1 1 1 1							
	Black	0 0 0 0 0 0	0 0 0 0 0	0 0 0 0 0 0							
	\triangle	1 0 0 0 0 0	0 0 0 0 0	0 0 0 0 0 0							
	Darker	0 1 0 0 0 0	0 0 0 0 0	0 0 0 0 0 0							
Gray scale		↑	1	↑							
of Red	∇	<u> </u>	1	<u> </u>							
	Brighter	1 0 1 1 1 1	0 0 0 0 0 0	0 0 0 0 0 0							
	∇	0 1 1 1 1 1	0 0 0 0 0 0	0 0 0 0 0							
	Red	1 1 1 1 1 1	0 0 0 0 0 0	0 0 0 0 0							
	Black	0 0 0 0 0 0	0 0 0 0 0 0	0 0 0 0 0 0							
		0 0 0 0 0 0	1 0 0 0 0 0	0 0 0 0 0							
	Darker	0 0 0 0 0 0	0 1 0 0 0 0	0 0 0 0 0							
Gray scale of Green	∇	\uparrow	↑ ↓	↑ ↓							
	Brighter	0 0 0 0 0 0	1 0 1 1 1 1	0 0 0 0 0 0							
	∇	0 0 0 0 0 0	0 1 1 1 1 1	0 0 0 0 0 0							
	Green	0 0 0 0 0 0	1 1 1 1 1 1	0 0 0 0 0 0							
	Black	0 0 0 0 0 0	0 0 0 0 0 0	0 0 0 0 0 0							
	Δ	0 0 0 0 0 0	0 0 0 0 0 0	1 0 0 0 0 0							
	Darker	0 0 0 0 0 0	0 0 0 0 0 0	0 1 0 0 0 0							
Gray scale of Blue	\triangle	↑	↓ .l.	↑ ↓							
	Brighter	0 0 0 0 0 0	0 0 0 0 0 0	1 0 1 1 1 1							
	∇	0 0 0 0 0 0	0 0 0 0 0 0	0 1 1 1 1 1							
	Blue	0 0 0 0 0 0	0 0 0 0 0 0	1 1 1 1 1 1							
	Black	0 0 0 0 0 0	0 0 0 0 0 0	0 0 0 0 0 0							
Gray	Δ	1 0 0 0 0 0	1 0 0 0 0 0	1 0 0 0 0 0							
scale	Darker	0 1 0 0 0 0	0 1 0 0 0 0	0 1 0 0 0 0							
of White	Δ ∇	1	<u> </u>								
		*	V	Ψ							
Q .	Brighter	1 1 1 1 1 1	101111	1 () 1 1 1 1							
& Black	Brighter ▽	1 0 1 1 1 1	1 0 1 1 1 1	1 0 1 1 1 1 1 0 1 1 1 1 1 1 1 1 1 1 1 1							

23




京东方	PRODUCT GROUP	REV	ISSUE DATE
BOE	TFT- LCD PRODUCT	P0	2014.11.12
SPEC. NUMBER	SPEC. TITLE		PAGE
	NT156WHM-N50 Preliminary Product Sp	24 OF 36	

9.0 POWER SEQUENCE

Global LCD Panel Exchange Center

To prevent a latch-up or DC operation of the LCD module, the power on/off seq uence shall be as shown in below

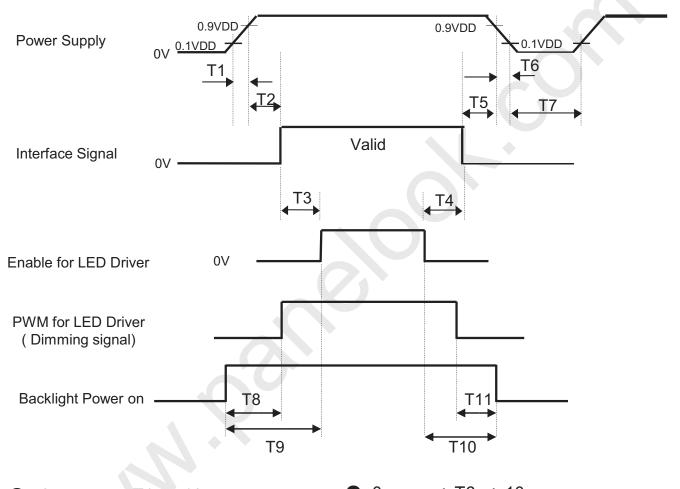

- 0.5ms \leq T1 \leq 10 ms
- \leq T2 \leq 50 ms 0 ms
- ≤ T3 200 ms
- $0 \text{ ms} \leq T4$
- 0ms ≤ T5

- 0 ms \leq T6 \leq 10 ms
- $150 \text{ms} \leq T7$
- 0 ms ≤ T8
- < T9 0 ms
- 0ms ≤ T10
- ≤ T11 0ms

Notes:


- 1. When the power supply VDD is 0V, keep the level of input signals on the low or keep high impedance.
- 2. Do not keep the interface signal high impedance when power is on. Back Light must be turn on after power for logic and interface signal are valid.



京东方	PRODUCT GROUP	REV	ISSUE DATE
BOE	TFT- LCD PRODUCT	P0	2014.11.12
SPEC. NUMBER	SPEC. TITLE		PAGE
	NT156WHM-N50 Preliminary Product Sp	25 OF 36	

9.1 Momentary voltage

Global LCD Panel Exchange Center

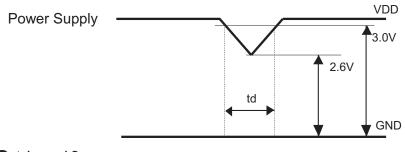

 \bullet td \leq 10 ms

Notes:

When momentary voltage VDD \geq 2.6V during td, the unit can work normally when VDD return to 3.0V.

10.0 Connector Description

Physical interface is described as for the connector on LCM. These connectors are capable of accommodating the following signals and will be following components.

10.1 TFT LCD Module

Connector Name /Description	For Signal Connector
Manufacturer	STM or Compatible
Type/ Part Number	MSAK24025P40G or Compatible
Mating housing/ Part Number	I-PEX 20455-040T-11 or Compatible



京东方	PRODUCT GROUP	REV	ISSUE DATE
BOE	TFT- LCD PRODUCT	P0	2014.11.12
SPEC. NUMBER	SPEC. TITLE		PAGE
	NT156WHM-N50 Preliminary Product Sp	pecification	26 OF 36

11.0 MECHANICAL CHARACTERISTICS

11.1 Dimensional Requirements

FIGURE 6 shows mechanical outlines for the model NT156WHM-N50. Other parameters are shown in Table 9.

<Table 9. Dimensional Parameters>

Parameter	Specification	Unit
Active Area	344.23 (H) ×193.54(V)	
Number of pixels	1366 (H) X 768 (V) (1 pixel = R + G + B dots)	
Pixel pitch	0.252 (H) X 0.252 (V)	
Pixel arrangement RGB Vertical stripe		
Display colors	262K	
Display mode	Normally white	
Dimensional outline	359.3(H)*209.5 (V) (W/PCB)*5.5(Max)	mm
Weight	450(Max)	gram
Doold Light	Connector : CRT F10401-1092	
Back Light	LED, Horizontal-LED Array type	

11.2 Mounting

See FIGURE 6.

11.3 Glare and Polarizer Hardness.

The surface of the LCD has an glare coating to maximize readability and hard coating to reduce scratching.

11.4 Light Leakage

There shall not be visible light from the back-lighting system around the edges of the screen as seen from a distance 50cm from the screen with an overhead light level of 350lux.

26



12.0 RELIABILITY TEST

The Reliability test items and its conditions are shown in below.

<Table 10. Reliability test>

No	Test Items	Conditions
1	High temperature storage test	Ta = 60 °C, 240 hrs
2	Low temperature storage test	Ta = -20 ℃, 240 hrs
3	High temperature & high humidity operation test	Ta = 50 ℃, 80%RH, 240 hrs
4	High temperature operation test	Ta = 50 °C, 240 hrs
5	Low temperature operation test	Ta = 0 °C, 240 hrs
6	Thermal shock	Ta = -20 °C ↔ 60 °C (0.5 hr), 100 cycle
7	Vibration test (non-operating)	1.5G, 10~500Hz,Half Sine X,Y,Z / Sweep rate : 1 hour
8	Shock test (non-operating)	220G, Half Sine Wave 2msec \pm X, \pm Y, \pm Z Once for each direction
9	Electro-static discharge test (non-operating)	Air : 150 pF, 330Ω, 15 KV Contact : 150 pF, 330Ω, 8 KV

13.0 HANDLING & CAUTIONS

- (1) Cautions when taking out the module
 - Pick the pouch only, when taking out module from a shipping package.
- (2) Cautions for handling the module
 - As the electrostatic discharges may break the LCD module, handle the LCD module with care. Peel a protection sheet off from the LCD panel surface as slowly as possible.
 - As the LCD panel and back light element are made from fragile glass material, impulse and pressure to the LCD module should be avoided.
 - As the surface of the polarizer is very soft and easily scratched, use a soft dry cloth without chemicals for cleaning.
 - Do not pull the interface connector in or out while the LCD module is operating.
 - Put the module display side down on a flat horizontal plane.
 - Handle connectors and cables with care.
- (3) Cautions for the operation
 - When the module is operating, do not lose CLK, ENAB signals. If any one of these signals is lost, the LCD panel would be damaged.
 - Obey the supply voltage sequence. If wrong sequence is applied, the module would be damaged.



京东方	PRODUCT GROUP	REV	ISSUE DATE
BOE	TFT- LCD PRODUCT	P0	2014.11.12
SPEC. NUMBER	SPEC. TITLE		PAGE
	NT156WHM-N50 Preliminary Product Sp	ecification	28 OF 36

(4) Cautions for the atmosphere

- Dew drop atmosphere should be avoided.
- Do not store and/or operate the LCD module in a high temperature and/or humidity atmosphere. Storage in an electro-conductive polymer packing pouch and under relatively low temperature atmosphere is recommended.

(5) Cautions for the module characteristics


- Do not apply fixed pattern data signal to the LCD module at product aging.
- Applying fixed pattern for a long time may cause image sticking.

(6) Other cautions

- Do not disassemble and/or re-assemble LCD module.
- Do not re-adjust variable resistor or switch etc.
- When returning the module for repair or etc., Please pack the module not to be broken. We recommend to use the original shipping packages.

14.0 LABEL


(1) Product label

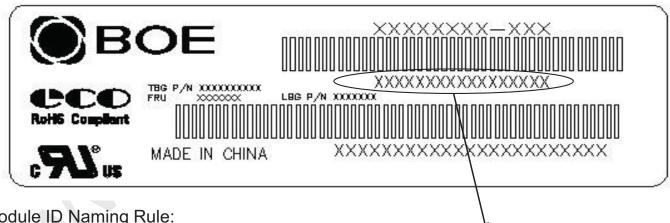

Module ID Naming Rule:

Digit Code	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17
Code	s	L	s	5	1	2	3	5	9	4	2	0	0	0	1	D	В
Description	100000000000000000000000000000000000000	l Code BN	Grad e	Line		ear	Mont h			ension its Of F	Code GCOD)				al No ZZZZZ	Z	

28

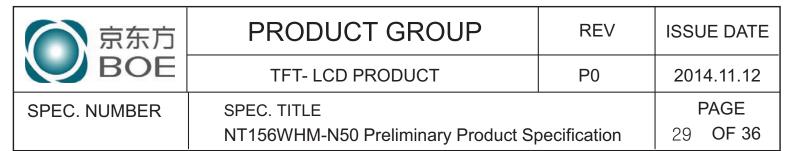

(2) High voltage caution label



HIGH VOLTAGE CAUTION

RISK OF ELECTRIC SHOCK, DISCONNECT THE ELECTRIC POWER BEFORE SERVICING

COLD CATHODE FLUORESCENT LAMP IN LCD PANEL CONTAINS A SMALL AMOUNT OF MERCURY, PLEASE FOLLOW LOCAL OR-DINANCES OR REGULATIONS FOR DISPOSAL.


(3) Box label

Label Size: 110 mm (L) \times 55 mm (W)

Contents

Model: NT156WHM-N50 Q'ty: Module Q'ty in one box Serial No.: Box Serial No.

Date: Packing Date Internal use of Product

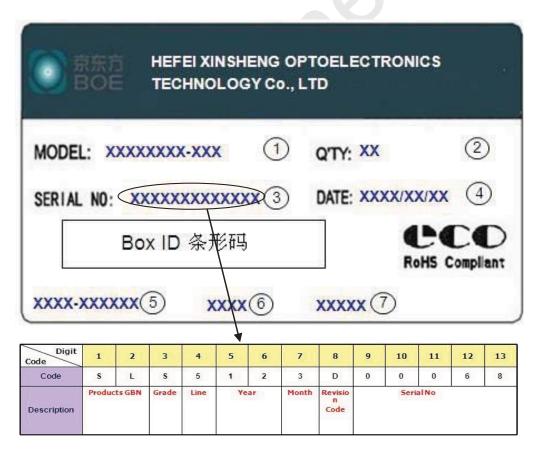


京东方 BOE	PRODUCT GROUP	REV	ISSUE DATE
	TFT- LCD PRODUCT	P0	2014.11.12
SPEC. NUMBER	SPEC. TITLE		PAGE
	NT156WHM-N50 Preliminary Product Specification		30 OF 36


15.0 PACKING INFORMATION

15.1 Packing order



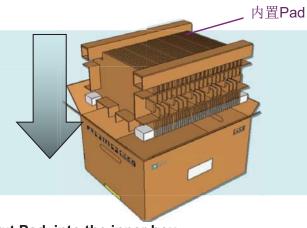


step

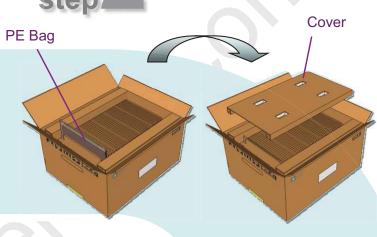

-. Put Pad into the inner box

- -. Put module into the paper spacer and modules bundled by PE Bag
- -. Put Cover on the top of the pad
- -. Capa.: 38pcs MDL/Inner Box



-. Pack with paper corner & belt, and use wrapping film to bind up them




-. 12ea Box/Pallet, 456 ea MDL/Pallet

15.2 Notes

- Box Dimension: 588*488*303mm Package Quantity in one Box: 38pcs
- Total Weight:19.3kg/Box


30

A4(210 X 297) R2010-6053-O(3/3)

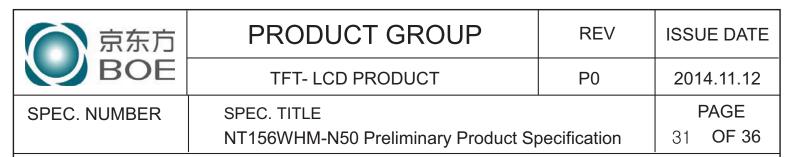

16.0 MECHANICAL OUTLINE DIMENSION

Figure 6. TFT-LCD Module Outline Dimension (Front View)

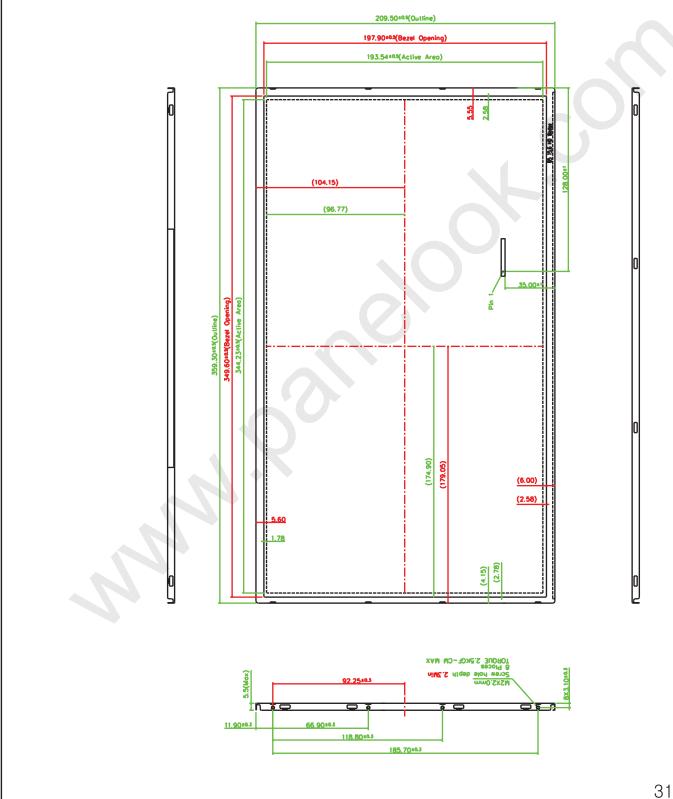



京东方		REV	ISSUE DATE
BOE	TFT- LCD PRODUCT	P0	2014.11.12
SPEC. NUMBER	SPEC. TITLE		PAGE
	NT156WHM-N50 Preliminary Product Specification		32 OF 36

17.0 EDID Table

TBD