GENERAL ENGINEERING NOTES:

1. INTERPRET DRAWING IN ACCORDANCE WITH ASME Y14.5-2018 STANDARDS.
2. MATERIAL: TI-6AL-4V GRADE 5 TITANIUM PER AMS 4928.
3. REMOVE ALL BURRS AND BREAK SHARP EDGES 0.015 MAX.
4. SURFACE FINISH: 32 Ra MAX ALL MACHINED SURFACES.
5. 100% FIRST ARTICLE INSPECTION PER SAE AS9102 REV C REQUIRED.
6. ITAR CONTROLLED: TECHNICAL DATA SUBJECT TO US EXPORT REGULATIONS.

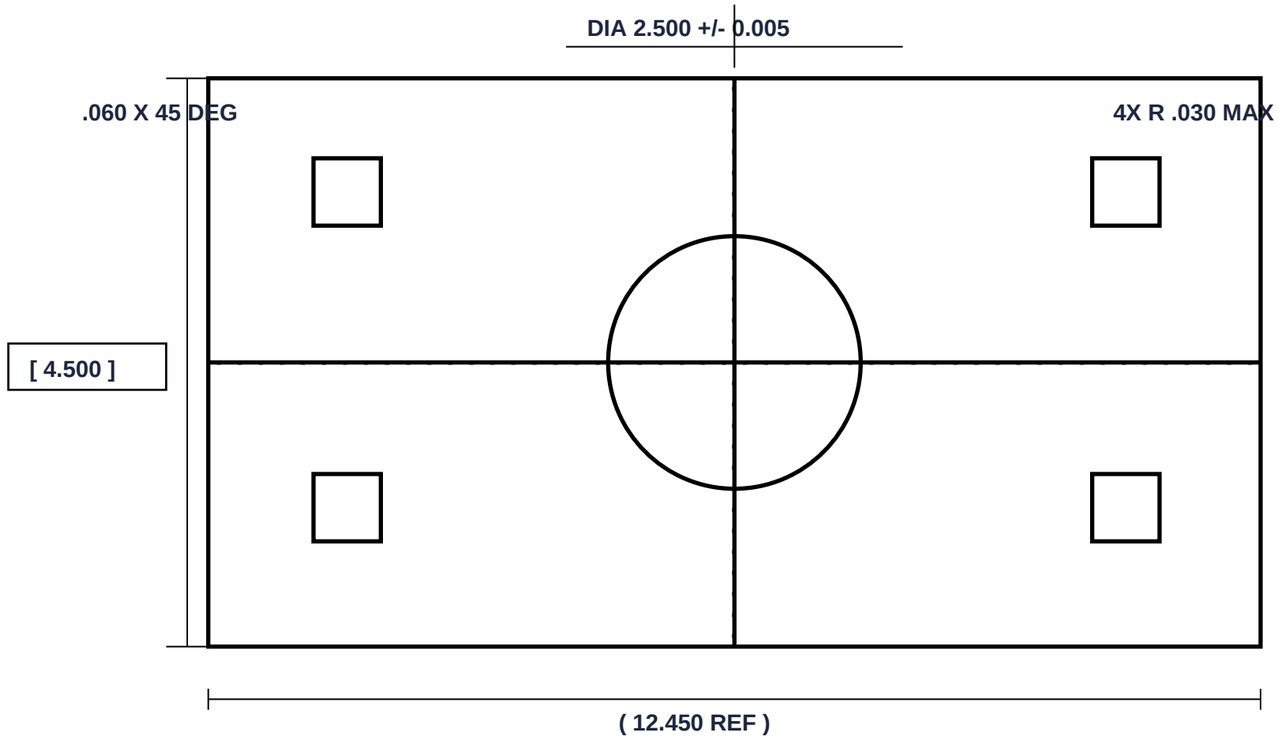

4X 1 3/8-12 UNF-2B

| PROFILE | 0.008 | A | B | | |

| POS | DIA 0.020 (M) | A | B | C |

| POS | DIA 0.005 (M) | A |

| FLAT | 0.002 |

LOONIST AEROSPACE DEFENSE CORP

TITLE: HIGH PRESSURE COMPRESSOR TURBINE MOUNT BRACKET

PART NO: AS9102-TMB-001 **REV: C**

CAGE: 1A2B3 | DWG NO: AS9102-TMB-001

TOLERANCES UNLESS NOTED: .X +/- .030, .XX +/- .010, .XXX +/- .005

ANGLES +/- 0.5 DEG | UNITS: INCHES | SHEET 1 OF 2

A

B

C

D

SECTION B-B: INTERNAL BORE & THREAD DETAILS

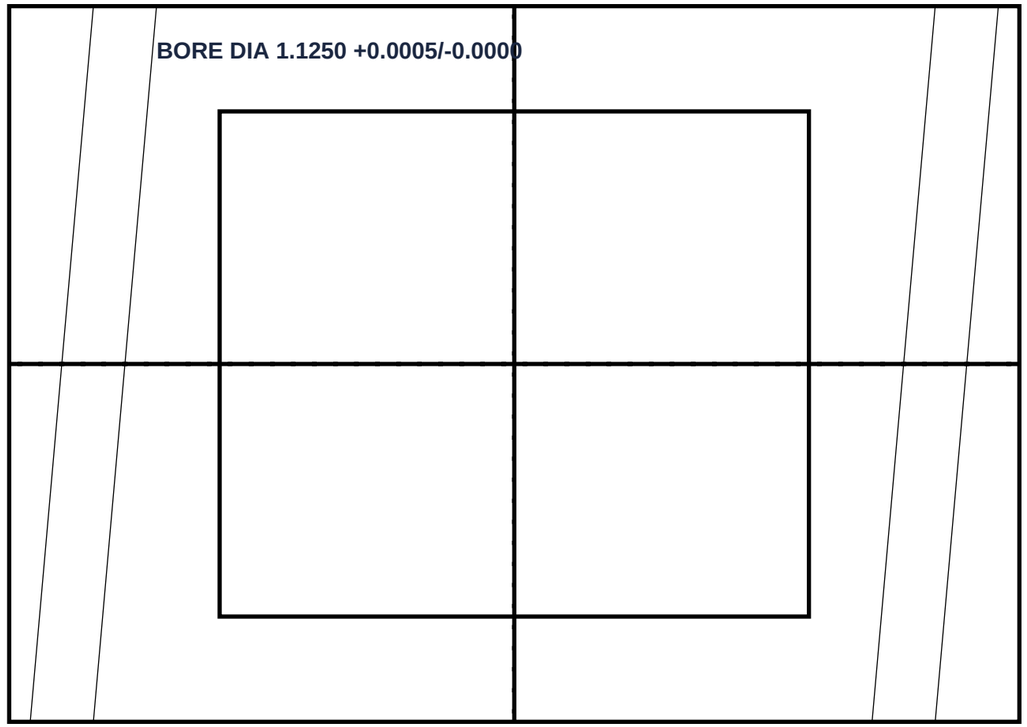

1.255 / 1.245

RUNOUT	0.002	A-B	

PERP	0.001	A	

4X .375-16 UNC-2B THRU
CBORE DIA .562 DEPTH .250

LOONIST AEROSPACE DEFENSE CORP

TITLE: TURBINE MOUNT BRACKET - INTERNAL BORES & THREADS

PART NO: AS9102-TMB-001	REV: C
CAGE: 1A2B3 | DWG NO: AS9102-TMB-001	

TOLERANCES UNLESS NOTED: .X +/- .030, .XX +/- .010, .XXX +/- .005

ANGLES +/- 0.5 DEG | UNITS: INCHES | SHEET 2 OF 2

1 2 3 4