A

A

GENERAL ENGINEERING NOTES:

1. INTERPRET DRAWING PER ASME Y14.5-2018 STANDARDS.
2. MATERIAL: TI-6AL-4V GRADE 5 TITANIUM PER AMS 4928.
3. REMOVE ALL BURRS AND BREAK SHARP EDGES 0.015 MAX.
4. SURFACE FINISH: 32 Ra MAX ALL MACHINED SURFACES.
5. 100% FIRST ARTICLE INSPECTION PER SAE AS9102 REV C REQUIRED.
6. ITAR CONTROLLED: EXPORT CONTROLLED DEFENSE DATA.

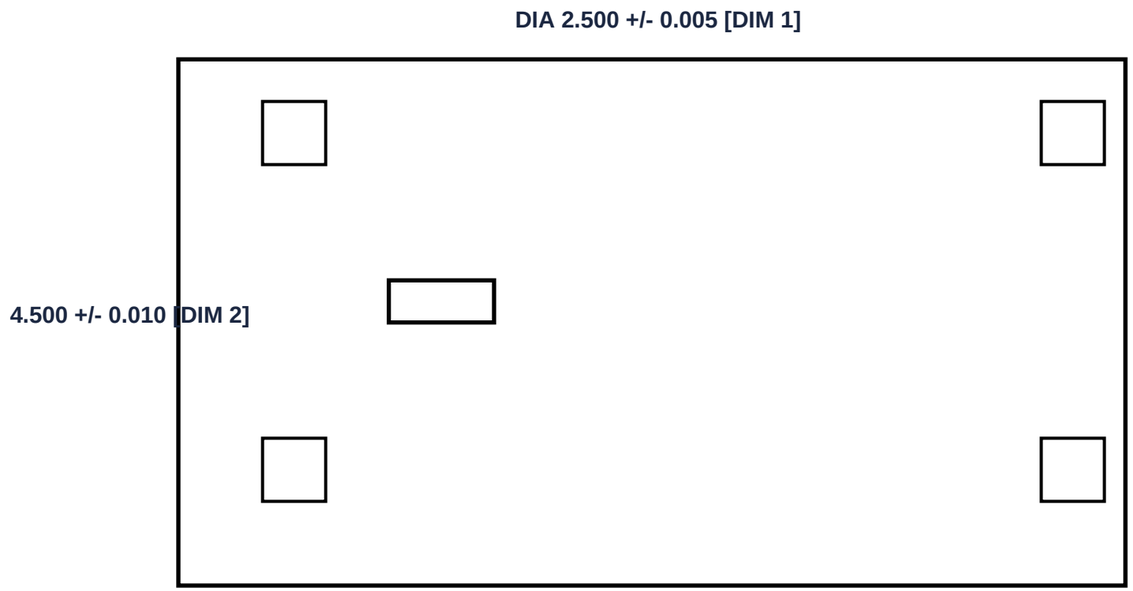

FEATURE CONTROL FRAME [FCF 1]

POS

2

1

3

LOONIST AEROSPACE DEFENSE CORP

TITLE: TURBINE MOUNT BRACKET - HIGH PRESSURE COMPRESSOR

PART NO: AS9102-TMB-001 **REV: C**

CAGE: 1A2B3 | SCALE: 1:1 SHEET 1 OF 2 | UNITS: INCHES

A

DETAIL B-B: INTERNAL BORE & THREADS [SCALE 2:1]

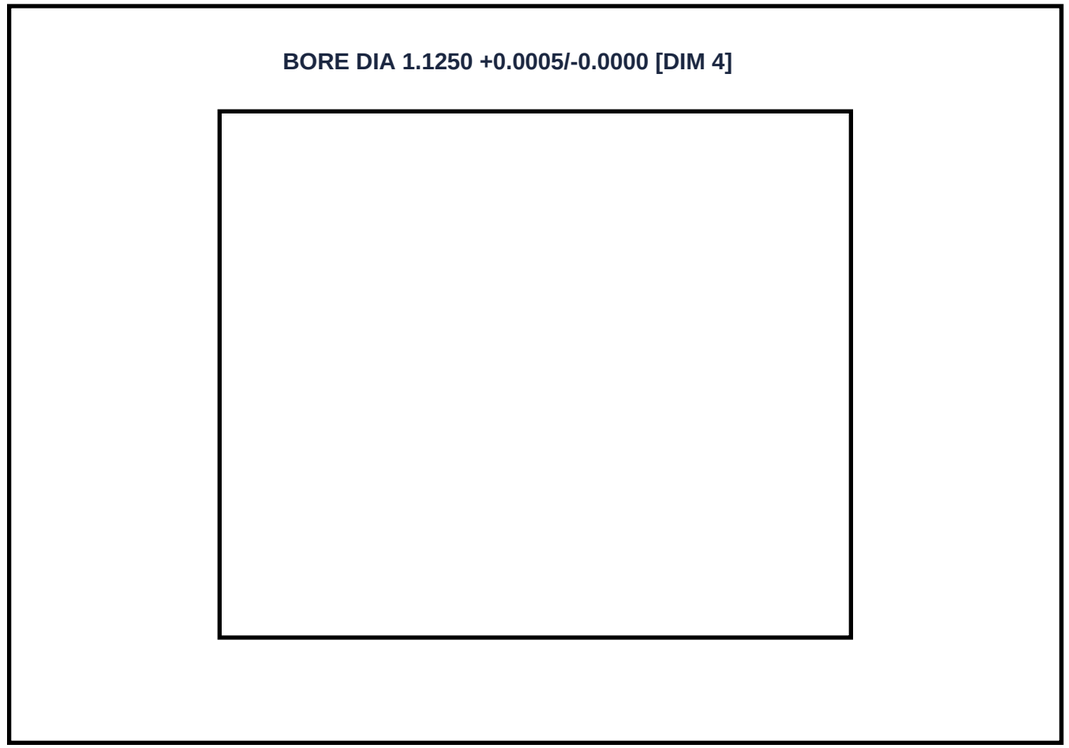

DEPTH 1.250 +/- 0.010 [DIM 6]

TOTAL RUNOUT SPECIFICATION [FCF 2]

RUNOUT

LOONIST AEROSPACE DEFENSE CORP

TITLE: TURBINE MOUNT BRACKET - SECTION DETAILS & THREADS

PART NO: AS9102-TMB-001 **REV: C**

CAGE: 1A2B3 | SCALE: 2:1 SHEET 2 OF 2 | UNITS: INCHES