

Contents

1. About us

2. Accounts


3. Products



Pursuit of Perfection

Depanelist, the world's most technically
advanced depaneling router system

Copyright© 2025 MSTECH All Rights Reserved.

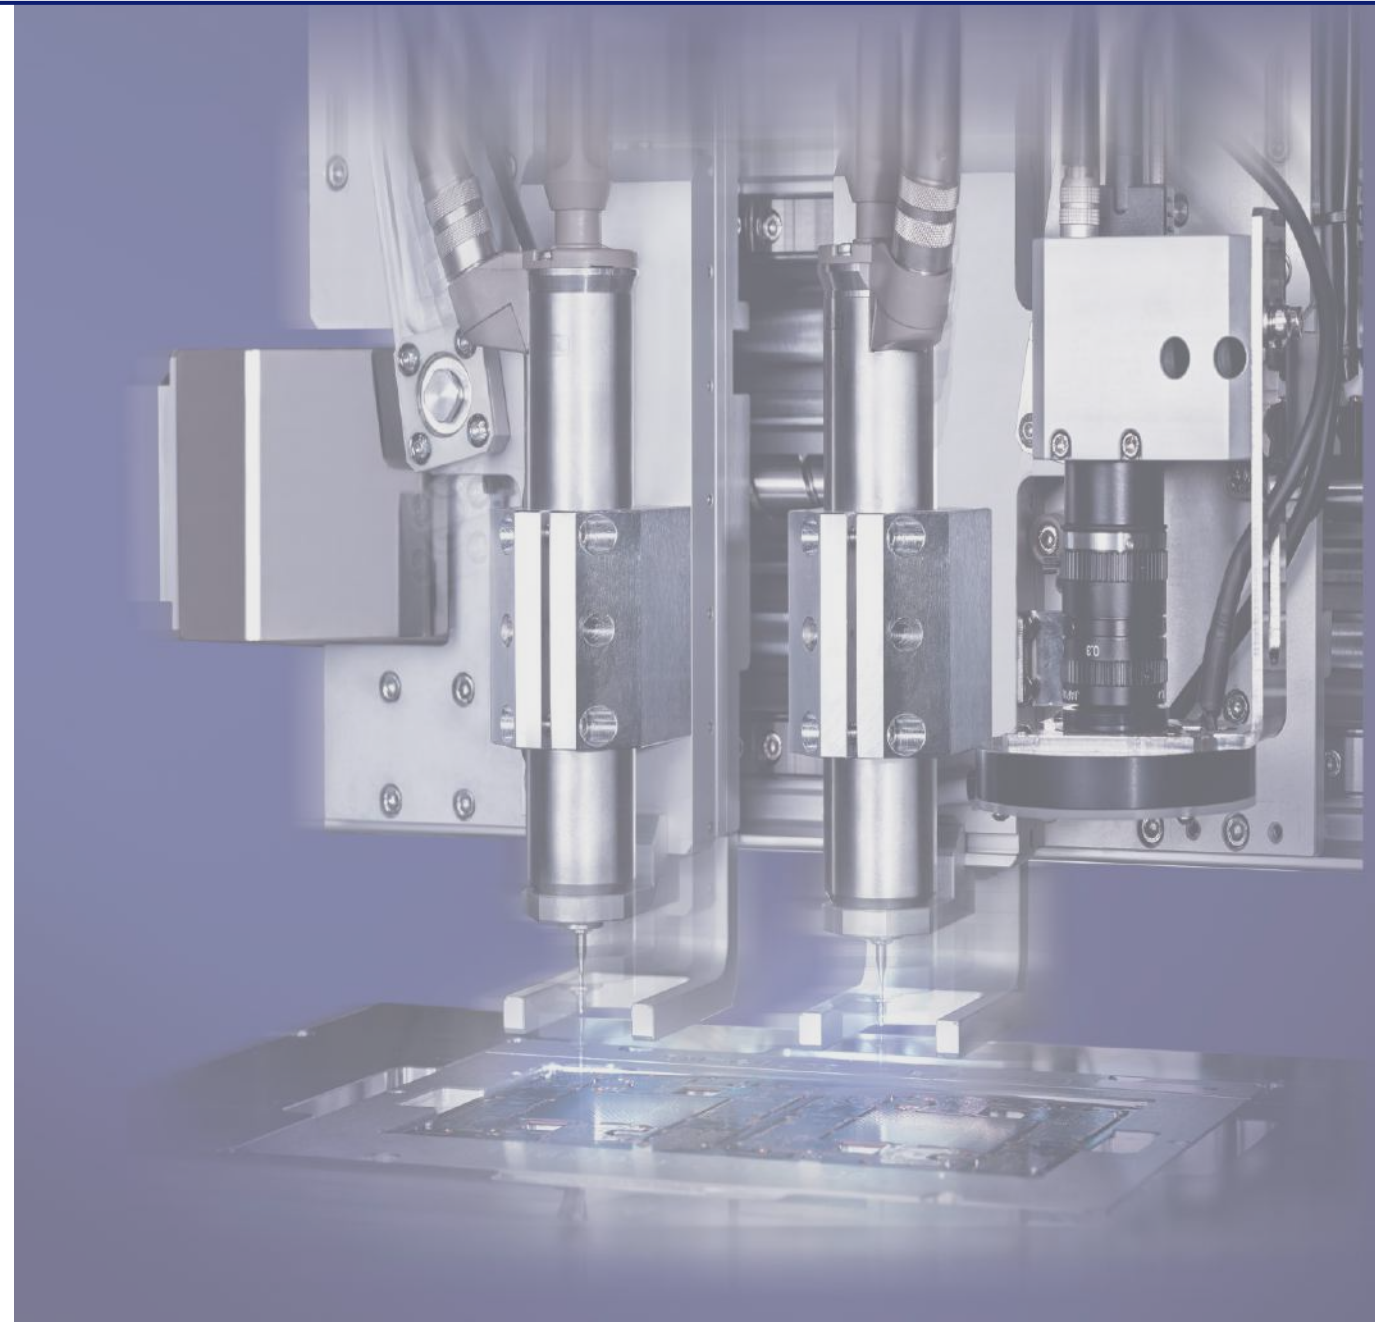

Contents

1. Generals
2. History
3. Certification & Award
4. Global Network

About us

Technology, Products, and People




Creating the Most valuable Service and Technology



Company	MSTECH
CEO	MS Choi
Foundation	Apr. 3. 1994
Capital	2.5 M\$
Employee	94 (Direct 50 / Indirect 44)
Product	PCB Router(Bit, Sawing, Laser), FA
Address	17 Saneop-Ro 156, Gwonseon-Gu, Suwon-Si, Gyeonggi-Do, R.O.Korea, 16648
Web. site	www.mstechcorp.kr

Organization

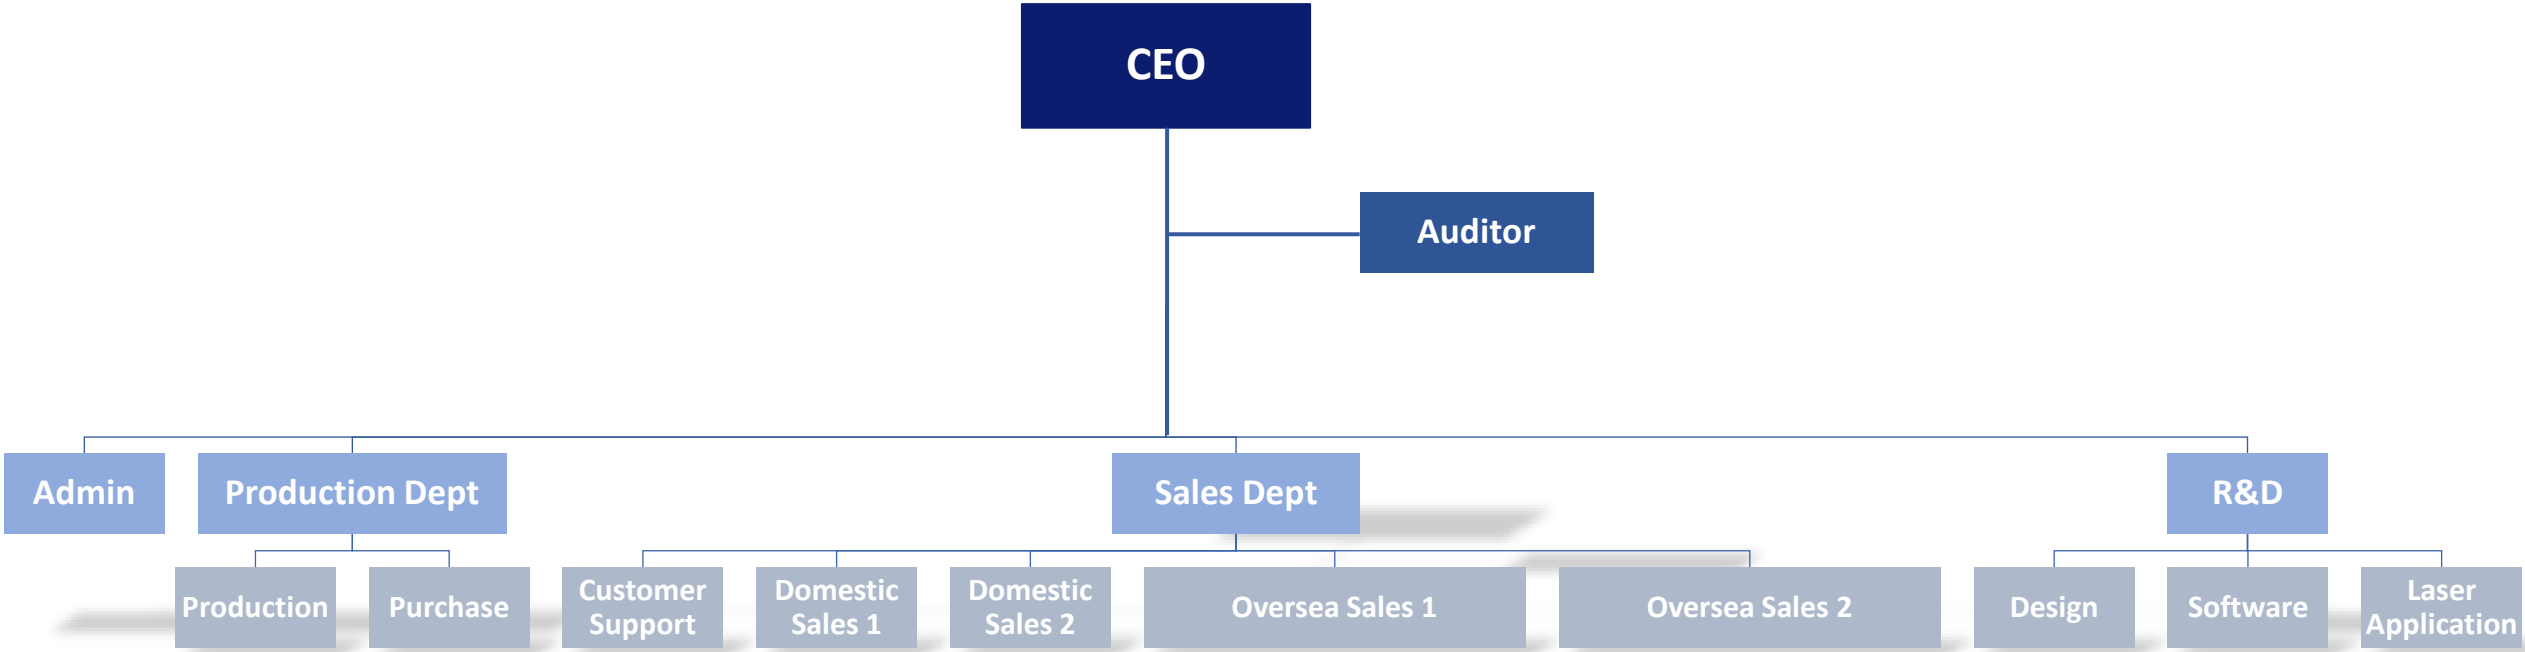

1999.

Registered for Samsung Electronics

SAMSUNG

2003.

Registered for LG Electronics



2006.

Established R&D Center
Developed Single In-line Router System



2008.


Registered for Nokia's Global Supplier

NOKIA

2013.

Developed

- BGA Grinding System
- PCB Sawing System
- Auto PCB Placing System
- Edge Detection function



1994.

MSTECH established



2002.

Developed Shuttle-X Router System



2005.

Developed Dual In-line Router System
Acquired ISO 9001: 2000 certificate



2007.

Merged & Acquired KMT's System Division



2010.

Registered for Continental's Global Supplier

Registered for Flextronics's Global Supplier

Continental
flex

2014.

Developed

- Auto Programming function
- Cutting Accuracy Result Inspection
- Deburring function

2016.

Developed All Diagnostic Intellectual Dust Collector

2019.

Developed DCB Snap Breaking



2022.

Developed

- Metal(AL) Router
- Laser Router System




2015.

Developed Auto Tray Function In-Line Router



2017.

Developed Moebius System

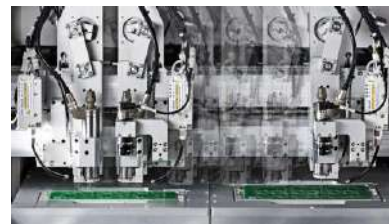

2021.

Developed

- Metal(AL) Router
- Universal Router System



2023.

Developed

- Hybrid Router (Bit, Sawing, Laser Combination)






ISO 9001



R&D Center
Authorization

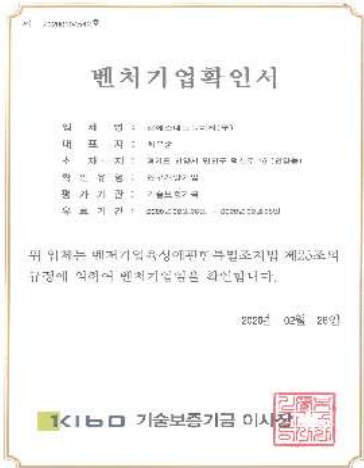

Certificate of
Venture Company



Certificate of
INNO Biz



CE Certificate



Small Giant Company
Designated by Korean GOV.



Presidential Award



World-Class Product Award

Patent Registration

NAME	REGISTRATION No.	REGISTRATION DATE
Routing apparatus with variably locating type vacuum pad	1020120129007	2012.11.14
Unified type routing apparatus including dust collecting device	1020120129008	2012.11.14
Method and apparatus for setting moving route of bit automatically	1020130168446	2013.12.31
Apparatus for inspecting substrate unit	1020140169890	2014.12.01
Device and control method for tool head of routing device	1020160164563	2016.12.05
Tray feeder	10-2018-0070591	2018.06.20
Routing device for photographing the whole of substrate array	10-2018-0070288	2018.06.19
Cutting apparatus for pressuring substrate edge	10-2019-0136554	2019.10.30
Universal Router	10-2019-0119042	2019.09.26
Cutting apparatus for pressuring substrate	10-2019-0077403	2019.06.27
Tray feeder	10-2021-0091152	2021.07.12

Patent Application

NAME	REGISTRATION No.	REGISTRATION DATE
Apparatus for pick up and transferring substrate	10-2022-0118328	2022.09.20
Apparatus for controlling head of routing device	10-2022-0118327	2022.09.22
Routing Apparatus	20191860.4 (EU)	2023.06.09
Routing apparatus for inspecting cutting surface	10-2023-0093858	2023.07.19
Routing apparatus	10-2023-0093856	2023.07.19
Dual head laser router	10-2023-0110073	2023.08.22
Particle detecting apparatus using line beam	10-2023-0111537	2023.08.24



Asia

Korea
China
Vietnam
India
Malaysia
Thailand
Singapore
Philippines


- ★ Korea – MSTECH Headquarter
- China – Sigmatek
- Vietnam – WKK
- India – Innotronics, Bergen Systems
- Indonesia – Premtronic
- Malaysia, Thailand – Premtronic, WKK
- Singapore – WKK
- Philippines – Maxtronics, Elitech



Europe

Spain
Germany
Portugal
Italia
French
Hungary
Poland
UK
Romania
Czech & Slovakia
Russia

- ★ Spain, Germany, Portugal, Italia, French
Hungary, Poland, UK – MSTECH Europe
- Romania – LTHD
- Czech, Slovakia – PBT
- Russia – SMT Technology

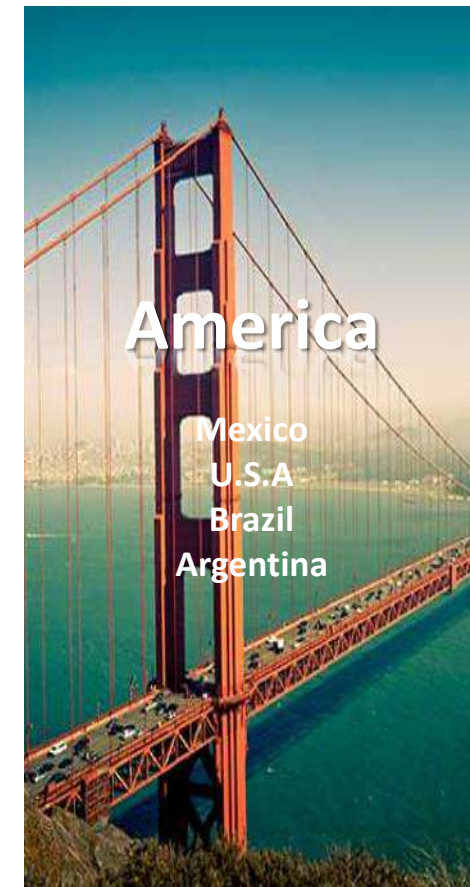

America


Mexico
U.S.A
Brazil
Argentina

- Mexico – SMT America
- U.S.A – SMT America
- Brazil, Argentina – SMT Solutions


- ★ MSTECH
- Service Center
- Distributor

Accounts

Trust is inherent in our client relationships

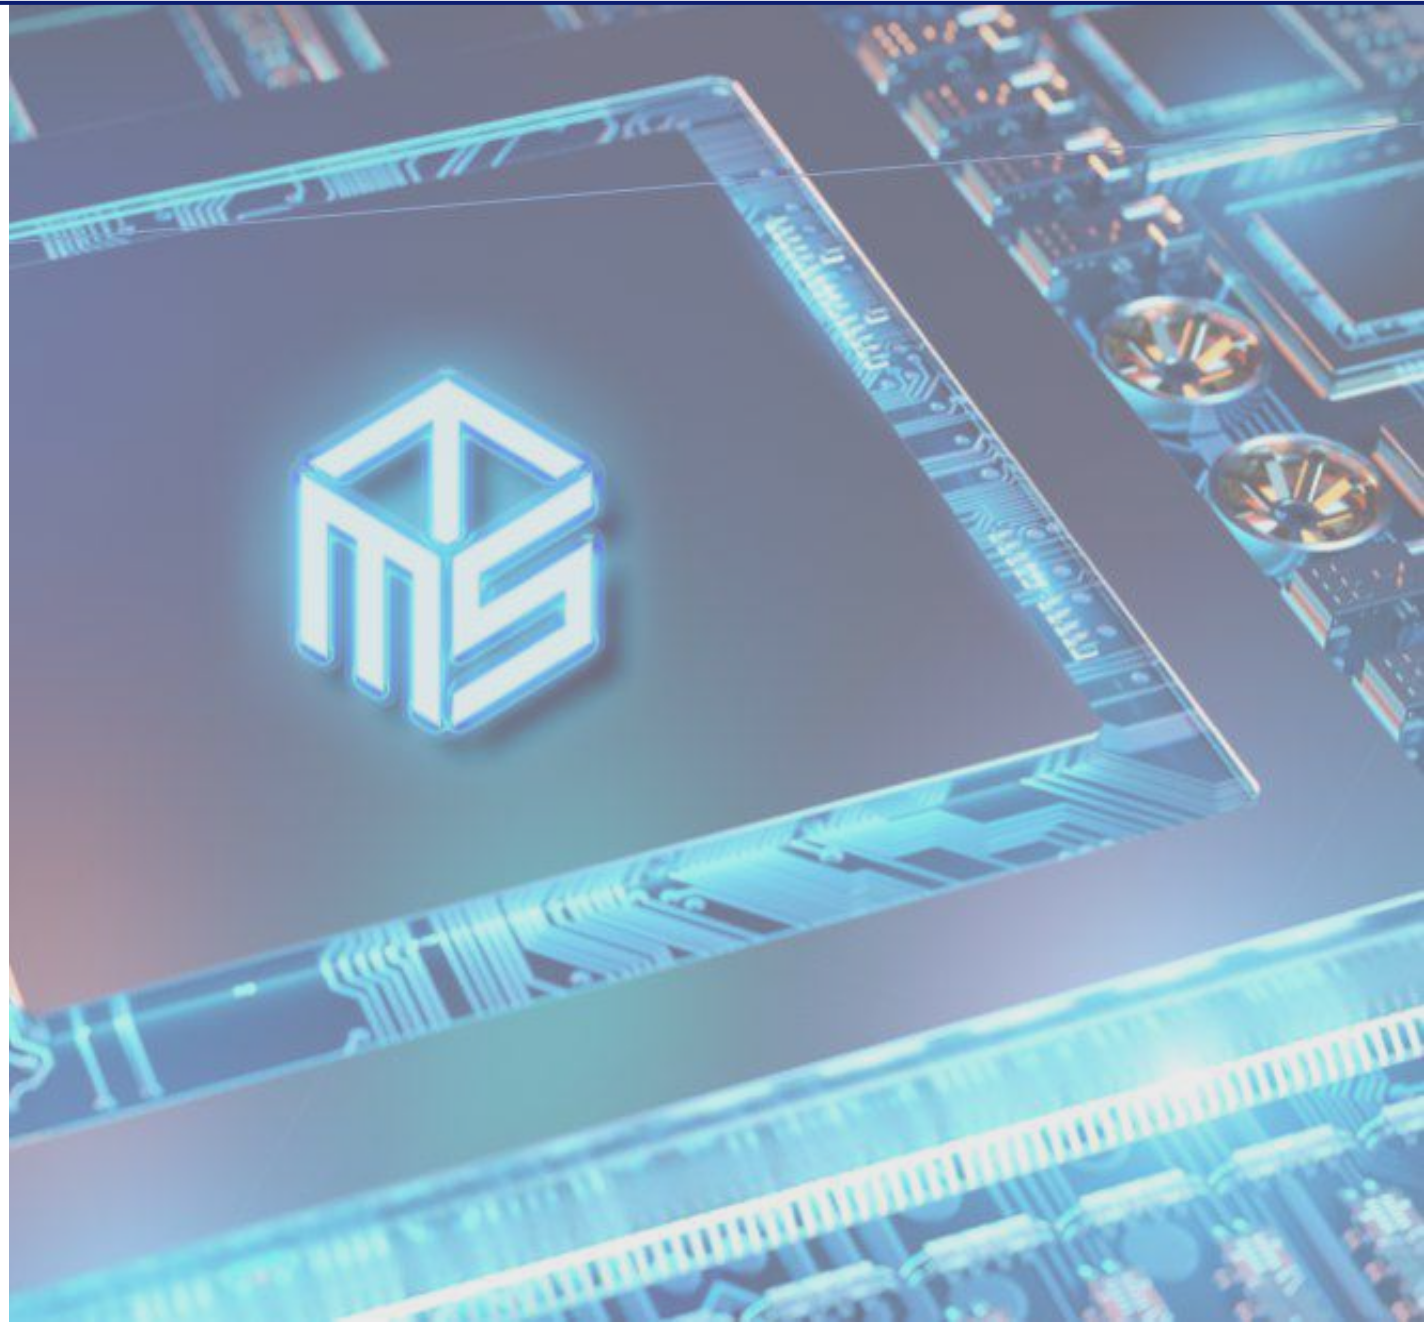

Major Customer

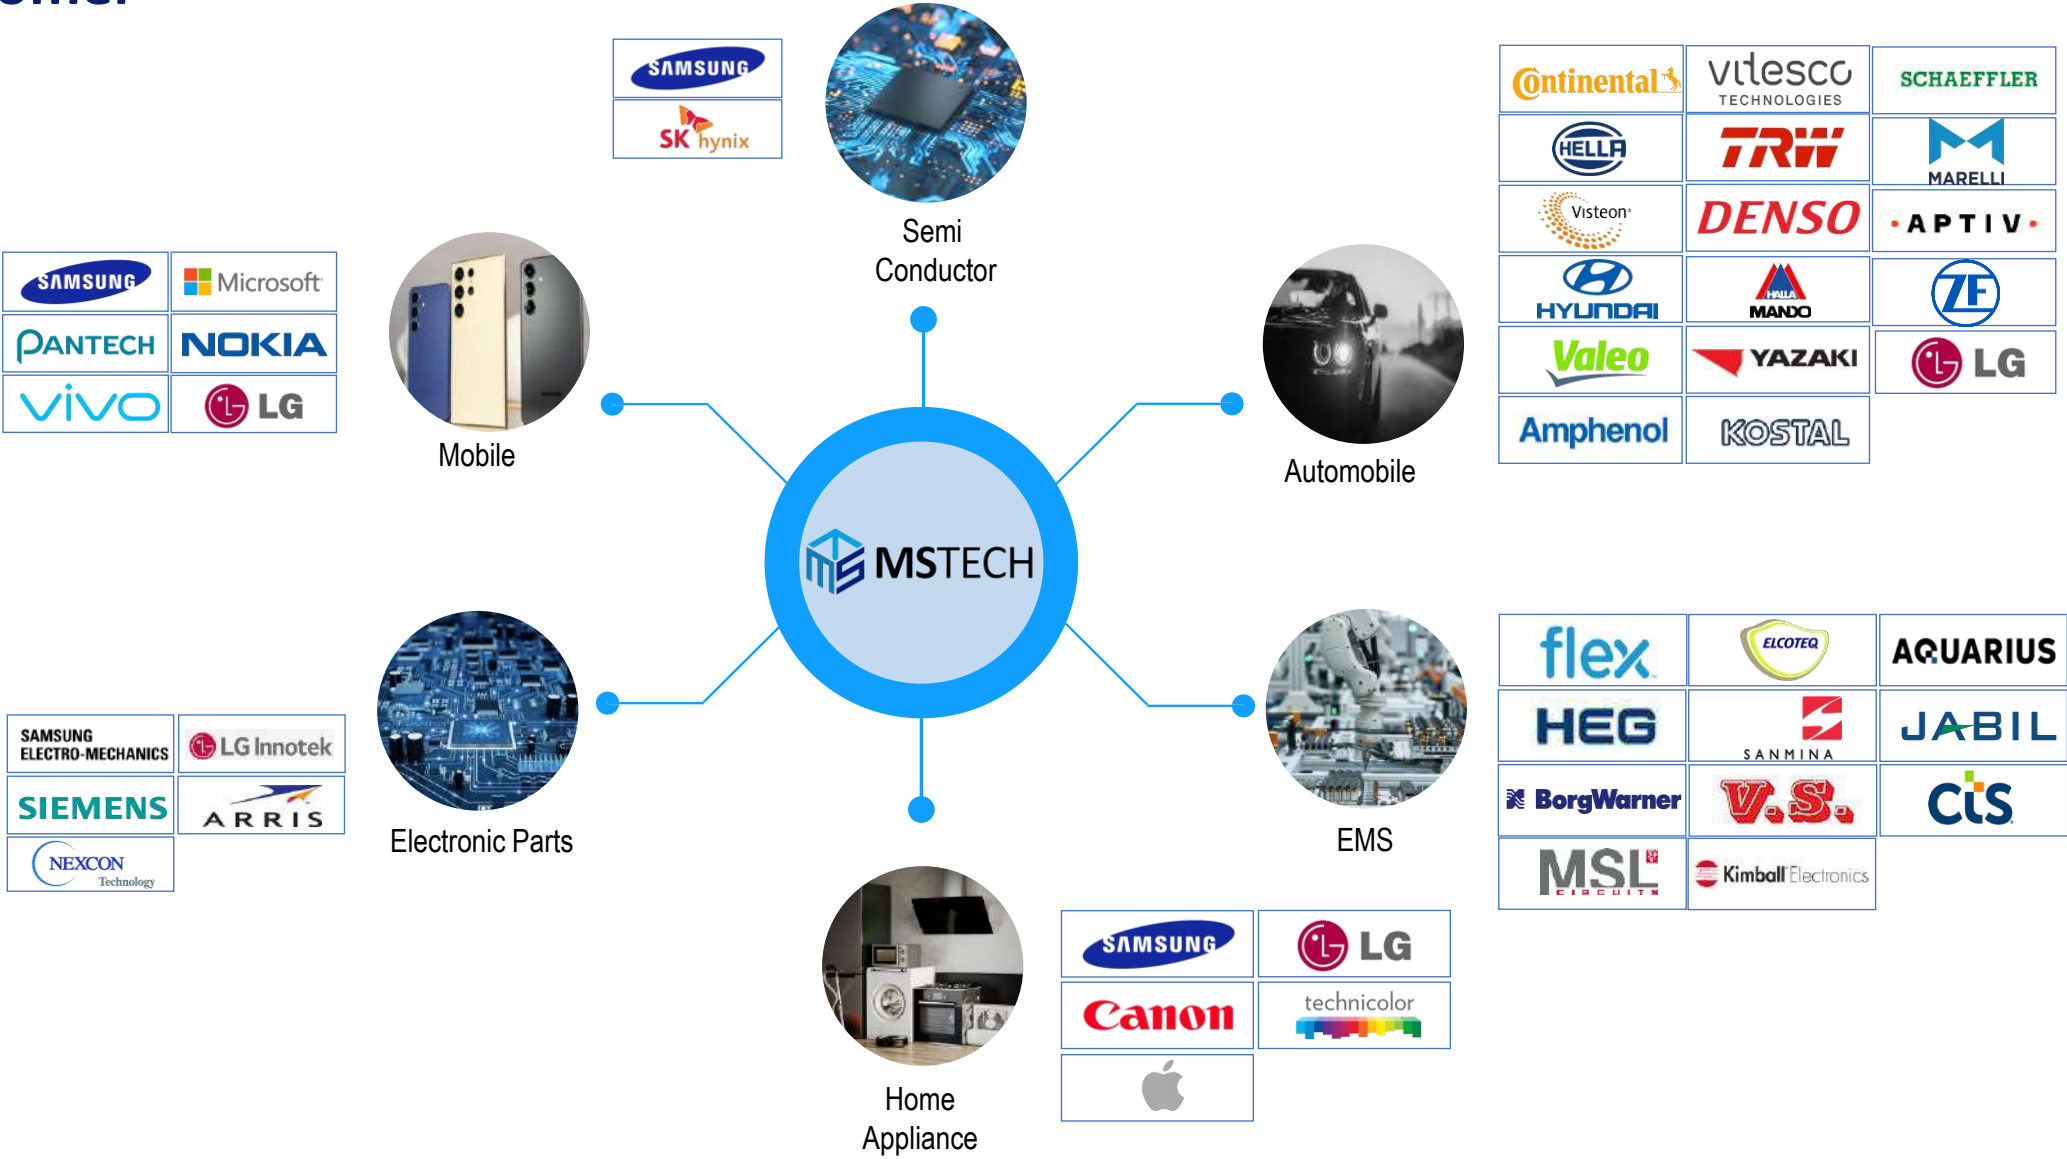

Line-Up

Depaneling					
Router		Sawing		Laser	
– Off-line	– In-line	– Off-line	– In-line	LS-NUN-T2	
nDPL-T	iDPL-T	nDPL-TW	iDPL-TW		
mDPL-T	iDPL-S	nDPL-SW	iDPL-SW		
nDPL-S	iDPL-C				
cDPL-S	iDPL-U				
	iDPL-D				

Products

Delivering a unique user experience
by MSTECH’S technology



nDPL-T mDPL-T nDPL-S cDPL-S iDPL-T iDPL-S iDPL-U iDPL-C iDPL-D nDPL-TW iDPL-TW LS-NUN-T2 Dust Collector

Special Features



Twin Table



Dual Spindle



Compact Design



Camera Aid Teaching



Ionizer System



Safety Sensor



Multi-bit management



User Friendly GUI


Options




ATC



MES Interface



Auto Scrap Picker




Vision System



Bit Broken Detection



Fixture ID Recognition



Cutting Inspection



Tool Verify


TWIN Table Off-Line Router



Special Features



Twin Table



Dual Spindle



Compact Design




Camera Aid Teaching



Ionizer System



Safety Sensor



Multi-bit management



User Friendly GUI


Options



ATC



MES Interface



Auto Scrap Picker



Vision System



Bit Broken Detection



Fixture ID Recognition



Cutting Inspection




Tool Verify

Twin Table & Mixed Production

Minimize idle time during PCB loading and unloading with twin table application.

*Standard Max Panel Size: 350 x 400 mm

- 300 x 350 mm(Available)
- nDPL-T-500: 500 x 500 mm(Option)
- - Other size and customization, contact us.

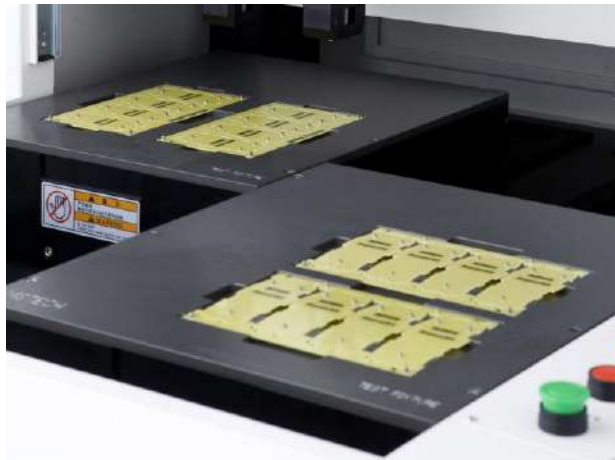

Special Features



Twin Table



Dual Spindle



Compact Design




Camera Aid Teaching



Ionizer System



Safety Sensor



Multi-bit management



User Friendly GUI

Options



ATC



MES Interface



Auto Scrap Picker



Vision System



Bit Broken Detection



Fixture ID Recognition



Cutting Inspection



Tool Verify



Dual Spindle Head & AWA

Equipped with dual spindle heads as standard, allowing for high cutting speed and performance. The spindle width is automatically adjusted according to the model. (3-4 spindles option available)

- *Using 2 Head Sycotec 250W as a standard. (500W: Option)
- *Optional: ATC
- *Single Spindle head is available
- *Compared to a single-head system, it reduces operator demand and lower overall costs.
- *AWA: Automatic Width Adjustment
- *ATC: Auto Tool Change




nDPL-TmDPL-TnDPL-ScDPL-SiDPL-TiDPL-SiDPL-UiDPL-CiDPL-DnDPL-TWiDPL-TWLS-NUN-T2Dust Collector

Special Features



Twin Table



Dual Spindle



Compact Design



Camera Aid Teaching



Ionizer System



Safety Sensor



Multi-bit management



User Friendly GUI

Options



ATC



MES Interface



Auto Scrap Picker



Vision System



Bit Broken Detection



Fixture ID Recognition



Cutting Inspection



Tool Verify

nDPL-T
Depanelist



Compact Design

Our Depaneling routers offer space-saving solutions for your needs.



nDPL-T

mDPL-T

nDPL-S

cDPL-S

iDPL-T

iDPL-S

iDPL-U

iDPL-C

iDPL-D

nDPL-TW

iDPL-TW


LS-NUN-T2

Dust Collector

Special Features



Twin Table



Dual Spindle



Compact Design



Camera Aid Teaching



Ionizer System



Safety Sensor



Multi-bit management



User Friendly GUI

Options



ATC



MES Interface



Auto Scrap Picker



Vision System



Bit Broken Detection




Fixture ID Recognition



Cutting Inspection



Tool Verify

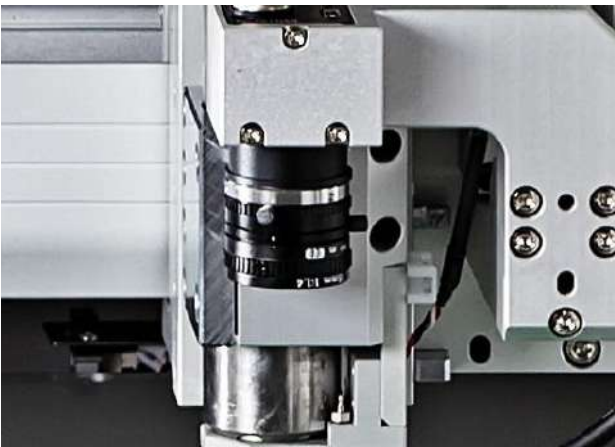

Camera Aid Teaching

Teaching can be done easily and precisely with a robust industrial camera.




nDPL-T mDPL-T nDPL-S cDPL-S iDPL-T iDPL-S iDPL-U iDPL-C iDPL-D nDPL-TW iDPL-TW LS-NUN-T2 Dust Collector

Special Features



Twin Table



Dual Spindle



Compact Design



Camera Aid Teaching



Ionizer System



Safety Sensor



Multi-bit management



User Friendly GUI


Options



ATC



MES Interface




Auto Scrap Picker



Vision System



Bit Broken Detection



Fixture ID Recognition



Cutting Inspection



Tool Verify



Ionizer System

Featuring a built-in ionizer system(Area Ionizing type) for effective dust removal and PCB protection.

nDPL-T
Depanelist



nDPL-T

mDPL-T

nDPL-S

cDPL-S

iDPL-T

iDPL-S

iDPL-U

iDPL-C

iDPL-D

nDPL-TW

iDPL-TW


LS-NUN-T2

Dust Collector

Special Features



Twin Table



Dual Spindle



Compact Design



Camera Aid Teaching



Ionizer System



Safety Sensor



Multi-bit management



User Friendly GUI

Options




ATC



MES Interface



Auto Scrap Picker



Vision System



Bit Broken Detection



Fixture ID Recognition



Cutting Inspection



Tool Verify



Safety Sensor for Operator's Safety


The 2 pairs of Safety Sensors ensure the operator's safety.



Special Features



Twin Table



Dual Spindle



Compact Design



Camera Aid Teaching



Ionizer System



Safety Sensor



Multi-bit management



User Friendly GUI


Options



ATC



MES Interface



Auto Scrap Picker




Vision System



Bit Broken Detection




Fixture ID Recognition



Cutting Inspection



Tool Verify

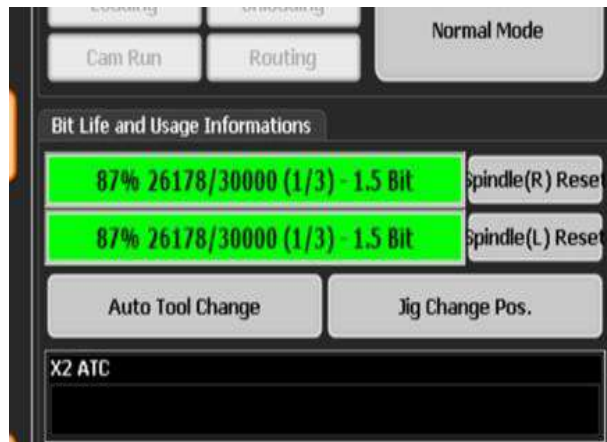

Multi-Bit Lifetime Management

By utilizing the bit in 2–3 stages,

- Minimize the OPEX (Operating Expenditure).
- The lifetime of each stage is calculated, and an alarm is triggered when the lifetime is reached.




nDPL-T
Depanelist

nDPL-TmDPL-TnDPL-ScDPL-SiDPL-TiDPL-SiDPL-UiDPL-CiDPL-DnDPL-TWiDPL-TWLS-NUN-T2Dust Collector

Special Features



Twin Table



Dual Spindle



Compact Design



Camera Aid Teaching



Ionizer System



Safety Sensor



Multi-bit management



User Friendly GUI

Options



ATC



MES Interface



Auto Scrap Picker



Vision System



Bit Broken Detection



Fixture ID Recognition



Cutting Inspection



Tool Verify



User Friendly GUI (HMI)


Easy and convenient router control through a simple, user-friendly interface, IPC, and Touch LCD Monitor



Special Features



Twin Table



Dual Spindle




Compact Design




Camera Aid Teaching



Ionizer System



Safety Sensor



Multi-bit management



User Friendly GUI

Options



ATC



MES Interface



Auto Scrap Picker



Vision System



Bit Broken Detection




Fixture ID Recognition



Cutting Inspection



Tool Verify

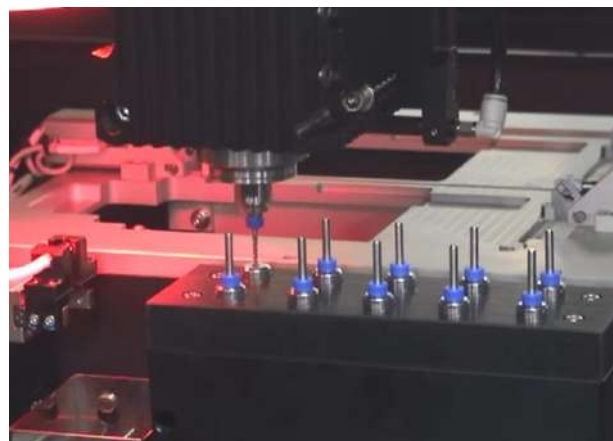

ATC (Automatic Tool Change)


- When the bit reaches the end of its lifetime or is broken, it is automatically replaced.
- Upgrade 500W spindle required.
- Bit Rack Included.
- The bit rack holds 4 bits per table.



Special Features



Twin Table



Dual Spindle



Compact Design




Camera Aid Teaching



Ionizer System



Safety Sensor



Multi-bit management




User Friendly GUI


Options



ATC



MES Interface



Auto Scrap Picker




Vision System



Bit Broken Detection



Fixture ID Recognition



Cutting Inspection



Tool Verify



Barcode Interlock & MES Interface

Barcodes are recognized to perform MES functions and integrate efficiently with the customer's network.


KEYENCE SR-X100W Standard
Cognex Upon Request



Special Features



Twin Table



Dual Spindle



Compact Design



Camera Aid Teaching



Ionizer System



Safety Sensor



Multi-bit management



User Friendly GUI


Options



ATC



MES Interface



Auto Scrap Picker



Vision System



Bit Broken Detection



Fixture ID Recognition



Cutting Inspection



Tool Verify

Auto Scrap Pickup System

Scraps are automatically disposed of after cutting.

*Cobot Integration




nDPL-T mDPL-T nDPL-S cDPL-S iDPL-T iDPL-S iDPL-U iDPL-C iDPL-D nDPL-TW iDPL-TW LS-NUN-T2 Dust Collector

Special Features



Twin Table



Dual Spindle



Compact Design



Camera Aid Teaching



Ionizer System



Safety Sensor



Multi-bit management



User Friendly GUI

Options



ATC



MES Interface



Auto Scrap Picker



Vision System



Bit Broken Detection



Fixture ID Recognition



Cutting Inspection



Tool Verify



Vision System


By using the vision system, fiducial mark check is available



Special Features



Twin Table



Dual Spindle



Compact Design




Camera Aid Teaching



Ionizer System



Safety Sensor



Multi-bit management



User Friendly GUI

Options



ATC



MES Interface



Auto Scrap Picker




Vision System



Bit Broken Detection



Fixture ID Recognition



Cutting Inspection



Tool Verify

Bit Broken & Slip Detection

By using bit break and slip detection, it prevents damage to the PCB caused by a broken bit used for cutting.




nDPL-T
Depanelist



Special Features



Twin Table



Dual Spindle



Compact Design



Camera Aid Teaching



Ionizer System



Safety Sensor



Multi-bit management



User Friendly GUI

Options



ATC



MES Interface



Auto Scrap Picker



Vision System



Bit Broken Detection



Fixture ID Recognition



Cutting Inspection



Tool Verify



Fixture ID Recognition


By installing a sensor that recognizes the FIXTURE ID, it is possible to verify whether the appropriate jig is installed, preventing operator mistakes.



Special Features



Twin Table



Dual Spindle



Compact Design




Camera Aid Teaching



Ionizer System



Safety Sensor



Multi-bit management



User Friendly GUI

Options



ATC



MES Interface



Auto Scrap Picker




Vision System



Bit Broken Detection



Fixture ID Recognition




Cutting Inspection



Tool Verify

Cutting Inspection


- Detect NG cutting PCBs by Camera.
- Vision System upgrade required.

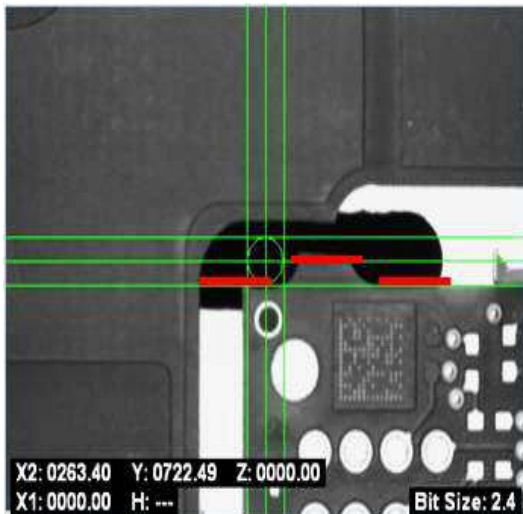

Special Features



Twin Table



Dual Spindle



Compact Design




Camera Aid Teaching



Ionizer System



Safety Sensor



Multi-bit management



User Friendly GUI

Options



ATC



MES Interface



Auto Scrap Picker




Vision System



Bit Broken Detection



Fixture ID Recognition



Cutting Inspection



Tool Verify

Tool Verification

It verifies whether the appropriate bit is installed.

- * ATC required
- **Bit Diameter Detection(Optional)
- ***Bit Color Ring Detection(Optional)



nDPL-T
Depanelist



Special Features



Ultra Speed




1+1 Single Mode



2x2 Dual Mode



Moebius Mode



Vision System



Bit Broken Detection



Dual Ionizer


Options



ATC




MES Interface



Auto Scrap Picker



Fixture ID Recognition



Cutting Inspection



Tool Verify

INFINITE(MOEBIUS) Off-Line Router

mDPL-T
Moebius ∞



Special Features




Ultra Speed




1+1 Single Mode



2x2 Dual Mode



Moebius Mode



Vision System



Bit Broken Detection



Dual Ionizer

Options



ATC



MES Interface



Auto Scrap Picker




Fixture ID Recognition



Cutting Inspection



Tool Verify

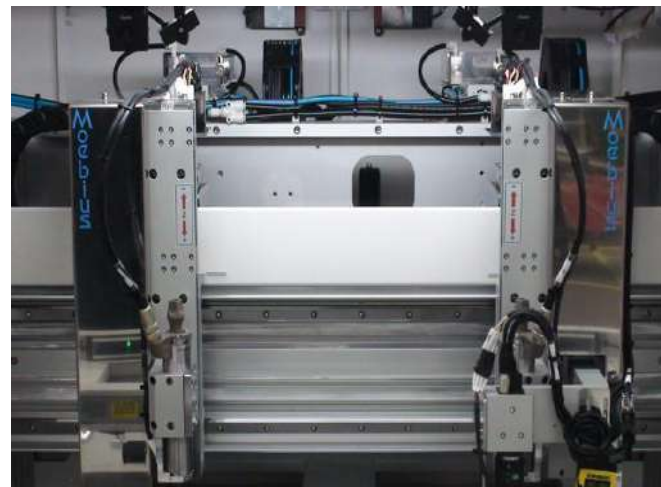

Ultra Speed Performance

- Ultimate efficiency
- Zero Idle time for operator
- High flexibility : Compatible with almost all PCB models


mDPL-T
Moebius ∞



Special Features




Ultra Speed



1+1 Single Mode



2x2 Dual Mode




Moebius Mode



Vision System



Bit Broken Detection



Dual Ionizer

Options



ATC



MES Interface



Auto Scrap Picker



Fixture ID Recognition




Cutting Inspection



Tool Verify

1+1 Single Mode

Each spindle operates independently.
Each spindle cuts its own PCB on its own table simultaneously.

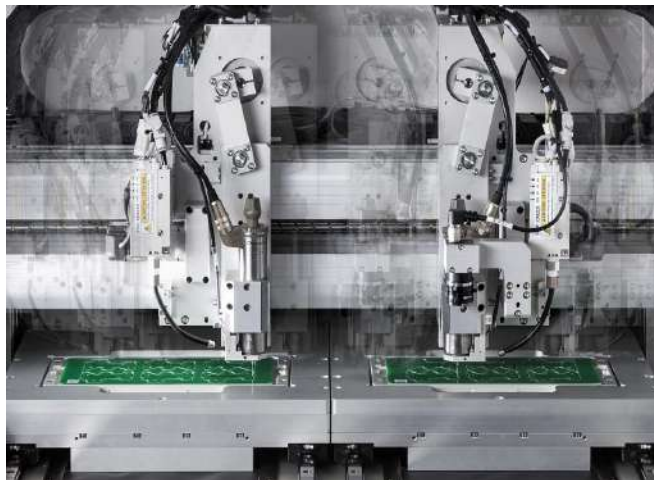

mDPL-T
Moebius ∞



Special Features



Ultra Speed



1+1 Single Mode



2x2 Dual Mode




Moebius Mode



Vision System



Bit Broken Detection



Dual Ionizer

Options



ATC



MES Interface



Auto Scrap Picker




Fixture ID Recognition



Cutting Inspection



Tool Verify

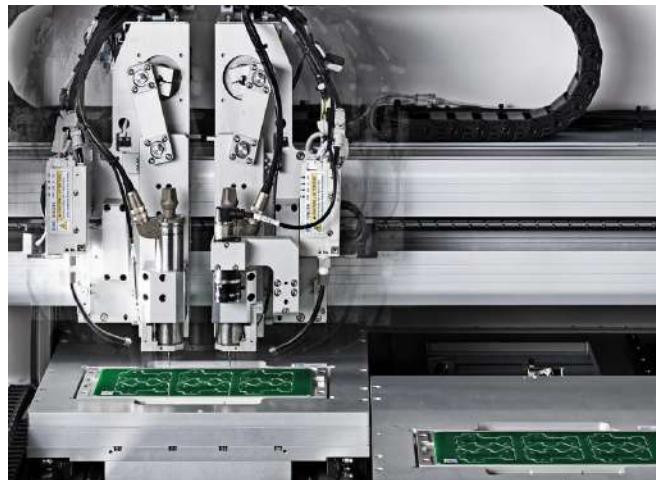

2x2 Dual Mode

2 spindles cutting which is MSTECH's patented technology. Both spindles cut a single PCB on one table one after another. Both 2 spindles automatically aligned the pitch between them.

mDPL-T
Moebius



Special Features



Ultra Speed



1+1 Single Mode



2x2 Dual Mode




Moebius Mode



Vision System



Bit Broken Detection



Dual Ionizer

Options



ATC



MES Interface



Auto Scrap Picker




Fixture ID Recognition



Cutting Inspection



Tool Verify

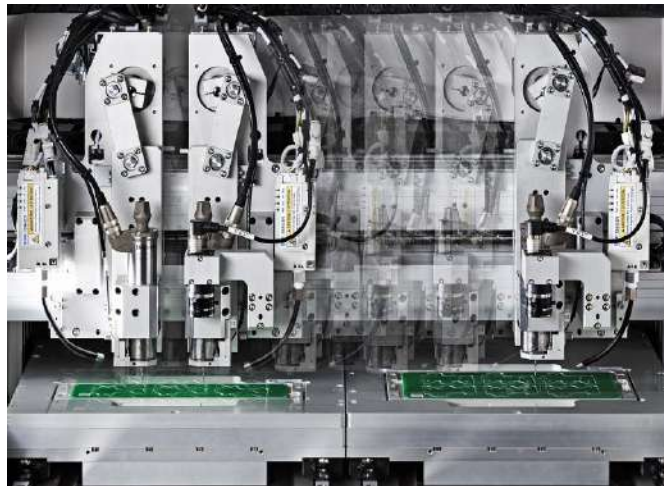

Moebius Mode (Mix Mode)

Perform cutting while automatically transforming between 2x2 mode and 1+1 mode as appropriate. When cutting panels with odd-numbered pitches, the AI can achieve a speed improvement of up to 25% compared to the fastest 2x2 mode.


mDPL-T
Moebius ∞




Special Features



Ultra Speed




1+1 Single Mode



2x2 Dual Mode



Moebius Mode



Vision System



Bit Broken Detection



Dual Ionizer

Options



ATC



MES Interface



Auto Scrap Picker



Fixture ID Recognition



Cutting Inspection



Tool Verify



Vision System

By using the vision system, fiducial mark check is available.

mDPL-T
Moebius ∞



Special Features




Ultra Speed



1+1 Single Mode



2x2 Dual Mode




Moebius Mode



Vision System



Bit Broken Detection



Dual Ionizer

Options



ATC



MES Interface



Auto Scrap Picker



Fixture ID Recognition




Cutting Inspection



Tool Verify

Bit Broken & Slip Detection

By using bit break and slip detection, it prevents damage to the PCB caused by a broken bit used for cutting.

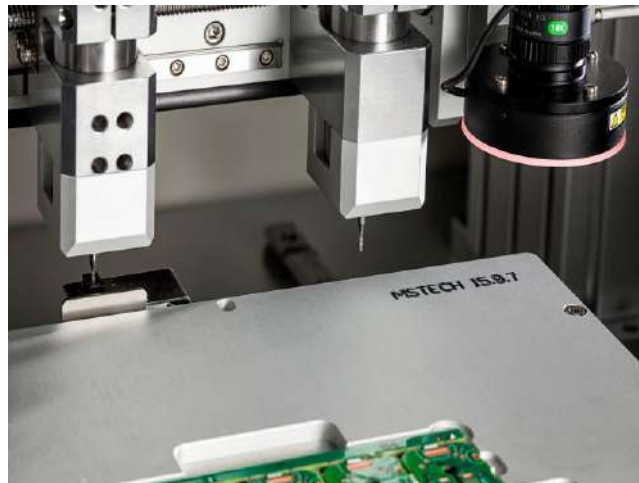


mDPL-T
Moebius ∞



Special Features



Ultra Speed



1+1 Single Mode



2x2 Dual Mode



Moebius Mode



Vision System



Bit Broken Detection



Dual Ionizer

Options



ATC



MES Interface



Auto Scrap Picker



Fixture ID Recognition




Cutting Inspection



Tool Verify

mDPL-T
Moebius ∞

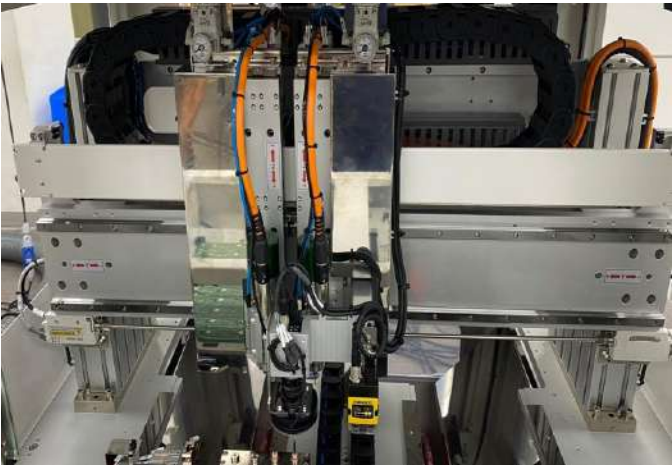

Dual Ionizer System

By using the dual ionizer, dust can be effectively removed



Special Features



Ultra Speed



1+1 Single Mode



2x2 Dual Mode




Moebius Mode



Vision System



Bit Broken Detection



Dual Ionizer

Options



ATC



MES Interface



Auto Scrap Picker




Fixture ID Recognition



Cutting Inspection



Tool Verify

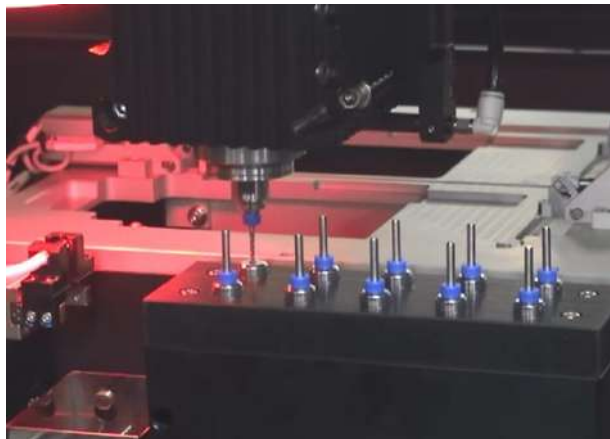

ATC (Automatic Tool Change)

- When the bit reaches the end of its lifetime or is broken, it is automatically replaced.
- Upgrade 500W spindle required.
- Bit Rack Included.
- The bit rack holds 4 bits per table.

mDPL-T
Moebius ∞



Special Features



Ultra Speed



1+1 Single Mode



2x2 Dual Mode




Moebius Mode



Vision System



Bit Broken Detection



Dual Ionizer

Options



ATC



MES Interface



Auto Scrap Picker



Fixture ID Recognition



Cutting Inspection



Tool Verify

mDPL-T
Moebius



Barcode Interlock & MES Interface

Barcodes are recognized to perform MES functions and integrate efficiently with the customer's network.


KEYENCE SR-X100W Standard
COGNEX Upon Request



Special Features



Ultra Speed



1+1 Single Mode



2x2 Dual Mode




Moebius Mode



Vision System



Bit Broken Detection



Dual Ionizer

Options



ATC



MES Interface



Auto Scrap Picker



Fixture ID Recognition




Cutting Inspection



Tool Verify

mDPL-T
Moebius

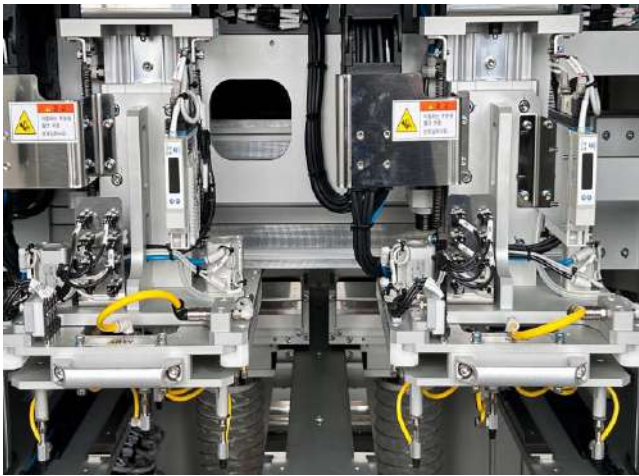

Auto Scrap Pickup System

Scraps are automatically disposed of after cutting.


*Cobot Integration



Special Features



Ultra Speed



1+1 Single Mode



2x2 Dual Mode




Moebius Mode



Vision System



Bit Broken Detection



Dual Ionizer

Options



ATC



MES Interface



Auto Scrap Picker



Fixture ID Recognition



Cutting Inspection



Tool Verify



Fixture ID Recognition

By installing a sensor that recognizes the FIXTURE ID, it is possible to verify whether the appropriate jig is installed, preventing operator mistakes.

mDPL-T
Moebius



Special Features



Ultra Speed



1+1 Single Mode



2x2 Dual Mode




Moebius Mode



Vision System



Bit Broken Detection



Dual Ionizer

Options



ATC




MES Interface



Auto Scrap Picker



Fixture ID Recognition




Cutting Inspection



Tool Verify

Cutting Inspection (Dual Camera / Scanner)

- Detect NG cutting PCBs by Camera.
- Vision System upgrade required.

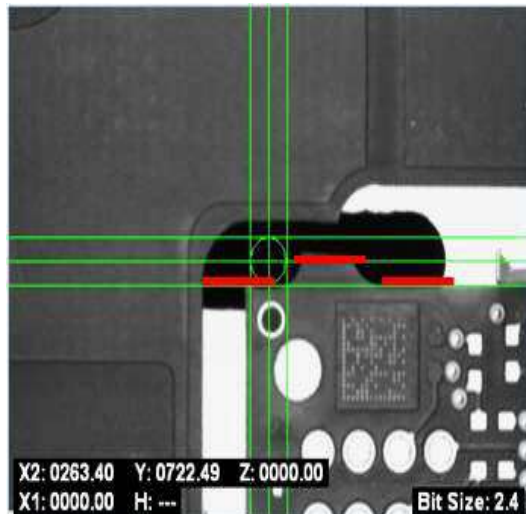

mDPL-T
Moebius ∞



Special Features



Ultra Speed



1+1 Single Mode



2x2 Dual Mode




Moebius Mode



Vision System



Bit Broken Detection



Dual Ionizer

Options



ATC



MES Interface



Auto Scrap Picker



Fixture ID Recognition



Cutting Inspection




Tool Verify

Tool Verification

It verifies whether the appropriate bit is installed.

- * ATC required
- **Bit Diameter Detection(Optional)
- ***Bit Color Ring Detection(Optional)

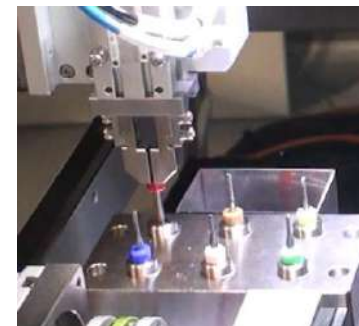

mDPL-T
Moebius



Special Features



Single Table



Dual Spindle



Compact Design



Camera Aid Teaching



Ionizer System



Safety Sensor



User Friendly GUI


Options



ATC



MES Interface




Vision System



Bit Broken Detection



Fixture ID Recognition



Cutting Inspection



Tool Verify

SINGLE Table Off-Line Router




nDPL-S
Depanelist



Special Features



Single Table



Dual Spindle



Compact Design



Camera Aid Teaching



Ionizer System



Safety Sensor



User Friendly GUI

Options



ATC



MES Interface



Vision System



Bit Broken Detection



Fixture ID Recognition



Cutting Inspection



Tool Verify

Single Table

- Compact Foot print
- Cost saving



Special Features



Single Table



Dual Spindle



Compact Design



Camera Aid Teaching



Ionizer System



Safety Sensor



User Friendly GUI

Options



ATC



MES Interface



Vision System



Bit Broken Detection



Fixture ID Recognition



Cutting Inspection



Tool Verify



Dual Spindle Head & AWA

Equipped with dual spindle heads as standard, allowing for high cutting speed and performance. The spindle width is automatically adjusted according to the model.
(3-4 spindles option available)

*Using 2 Head Sycotec 250W as a standard. (500W: Option)

*Optional: ATC

*Single Spindle head is available

*Compared to a single-head system, it reduces operator demand and lower overall costs.

*AWA: Automatic Width Adjustment

*ATC: Auto Tool Change




nDPL-S
Depanelist

nDPL-T mDPL-T nDPL-S cDPL-S iDPL-T iDPL-S iDPL-U iDPL-C iDPL-D nDPL-TW iDPL-TW LS-NUN-T2 Dust Collector

Special Features



Single Table



Dual Spindle



Compact Design



Camera Aid Teaching



Ionizer System



Safety Sensor



User Friendly GUI

Options



ATC



MES Interface



Vision System



Bit Broken Detection



Fixture ID Recognition



Cutting Inspection



Tool Verify

Compact Design


Our Depaneling routers offer space-saving solutions for your needs



Special Features



Single Table



Dual Spindle



Compact Design



Camera Aid Teaching



Ionizer System



Safety Sensor



User Friendly GUI

Options



ATC



MES Interface



Vision System



Bit Broken Detection




Fixture ID Recognition



Cutting Inspection



Tool Verify

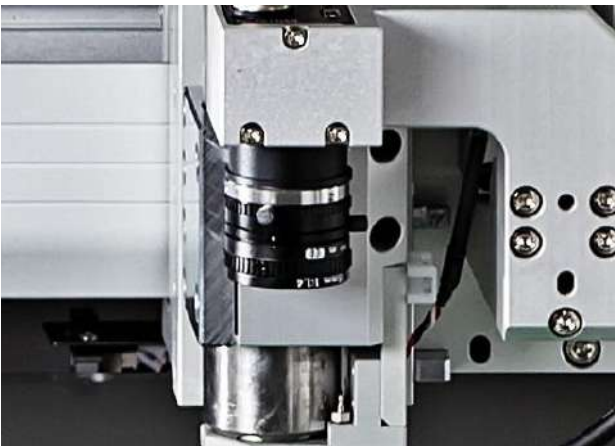

Camera Aid Teaching

Teaching can be done easily and precisely with a robust industrial camera.




nDPL-T mDPL-T **nDPL-S** cDPL-S iDPL-T iDPL-S iDPL-U iDPL-C iDPL-D nDPL-TW iDPL-TW LS-NUN-T2 Dust Collector

Special Features



Single Table



Dual Spindle



Compact Design



Camera Aid Teaching



Ionizer System



Safety Sensor



User Friendly GUI

Options



ATC



MES Interface



Vision System



Bit Broken Detection



Fixture ID Recognition



Cutting Inspection



Tool Verify



Ionizer System


Featuring a built-in ionizer (Area Ionizing type) for effective dust removal and PCB protection.



Special Features



Single Table



Dual Spindle



Compact Design



Camera Aid Teaching



Ionizer System



Safety Sensor



User Friendly GUI

Options



ATC



MES Interface



Vision System



Bit Broken Detection



Fixture ID Recognition



Cutting Inspection



Tool Verify

Safety Sensor for Operator's Safety

The 2 pairs of Safety Sensors ensure the operator's safety.



nDPL-S
Depanelist


Depanelist

nDPL-T mDPL-T nDPL-S cDPL-S iDPL-T iDPL-S iDPL-U iDPL-C iDPL-D nDPL-TW iDPL-TW LS-NUN-T2 Dust Collector

Special Features




Single Table



Dual Spindle



Compact Design



Camera Aid Teaching



Ionizer System



Safety Sensor



User Friendly GUI

Options



ATC



MES Interface



Vision System



Bit Broken Detection



Fixture ID Recognition



Cutting Inspection



Tool Verify



User Friendly GUI based on IPC & Touch LCD


Easy and convenient router control through a simple, user-friendly interface, IPC, and Touch LCD Monitor



Special Features



Single Table



Dual Spindle



Compact Design



Camera Aid Teaching



Ionizer System



Safety Sensor



User Friendly GUI

Options



ATC



MES Interface



Vision System



Bit Broken Detection




Fixture ID Recognition



Cutting Inspection



Tool Verify

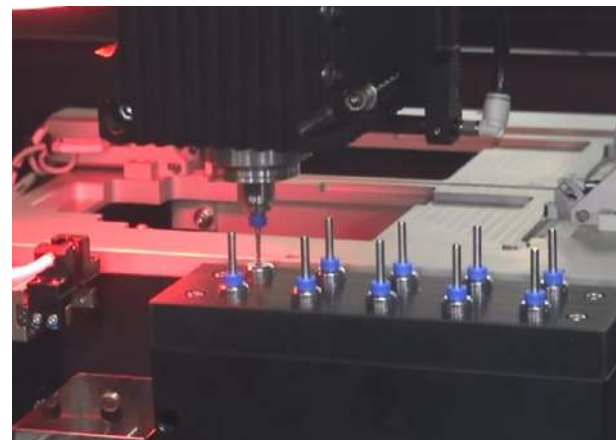

ATC (Automatic Tool Change)

- When the bit reaches the end of its lifetime or is broken, it is automatically replaced.
- Upgrade 500W spindle required.
- Bit Rack Included.
- The bit rack holds 4 bits per table.




nDPL-S
Depanelist

Special Features



Single Table



Dual Spindle



Compact Design



Camera Aid Teaching



Ionizer System



Safety Sensor



User Friendly GUI

Options



ATC



MES Interface



Vision System



Bit Broken Detection



Fixture ID Recognition



Cutting Inspection



Tool Verify



Barcode Interlock & MES Interface

Barcodes are recognized to perform MES functions and integrate efficiently with the customer's network.

KEYENCE SR-X100W Standard
COGNEX Upon Request




nDPL-S
Depanelist

Special Features



Single Table



Dual Spindle



Compact Design



Camera Aid Teaching



Ionizer System



Safety Sensor



User Friendly GUI


Options



ATC



MES Interface



Vision System



Bit Broken Detection




Fixture ID Recognition



Cutting Inspection



Tool Verify

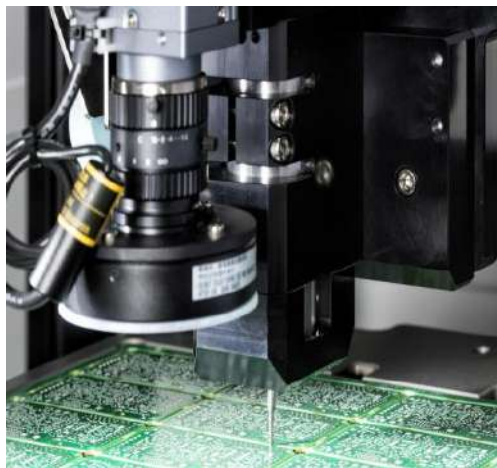

Vision System

By using the vision system, fiducial mark check is available.




nDPL-S
Depanelist

Special Features



Single Table



Dual Spindle



Compact Design



Camera Aid Teaching



Ionizer System



Safety Sensor



User Friendly GUI

Options



ATC



MES Interface



Vision System



Bit Broken Detection



Fixture ID Recognition




Cutting Inspection



Tool Verify

Bit Broken & Slip Detection

By using bit break and slip detection, it prevents damage to the PCB caused by a broken bit used for cutting.

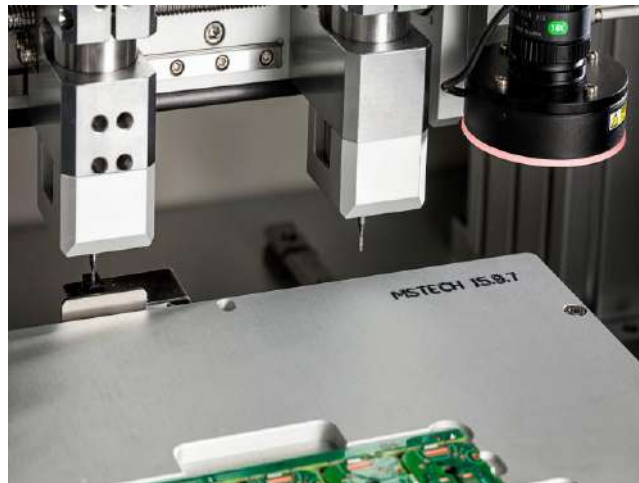

nDPL-T

mDPL-T

nDPL-S

cDPL-S

iDPL-T

iDPL-S

iDPL-U

iDPL-C

iDPL-D

nDPL-TW

iDPL-TW


LS-NUN-T2

Dust Collector

Special Features



Single Table



Dual Spindle



Compact Design



Camera Aid Teaching



Ionizer System



Safety Sensor



User Friendly GUI

Options



ATC



MES Interface



Vision System



Bit Broken Detection



Fixture ID Recognition



Cutting Inspection



Tool Verify



Fixture ID Recognition


By installing a sensor that recognizes the FIXTURE ID, it is possible to verify whether the appropriate jig is installed, preventing operator mistakes.



Special Features



Single Table



Dual Spindle



Compact Design



Camera Aid Teaching



Ionizer System



Safety Sensor



User Friendly GUI

Options



ATC



MES Interface




Vision System



Bit Broken Detection



Fixture ID Recognition




Cutting Inspection



Tool Verify

Cutting Inspection

- Detect NG cutting PCBs by Camera.
- Vision System upgrade required.

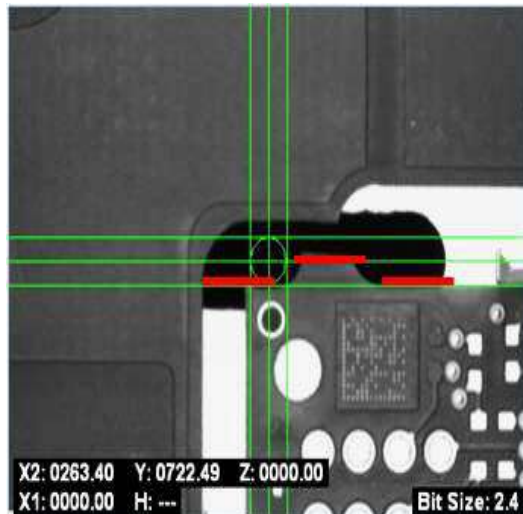


nDPL-S
Depanelist

Special Features



Single Table



Dual Spindle



Compact Design



Camera Aid Teaching



Ionizer System



Safety Sensor



User Friendly GUI

Options



ATC



MES Interface



Vision System



Bit Broken Detection



Fixture ID Recognition



Cutting Inspection



Tool Verify

Tool Verification

It verifies whether the appropriate bit is installed.

- * ATC required
- **Bit Diameter Detection(Optional)
- ***Bit Color Ring Detection(Optional)



nDPL-S
Depanelist

nDPL-T mDPL-T nDPL-S cDPL-S iDPL-T iDPL-S iDPL-U iDPL-C iDPL-D nDPL-TW iDPL-TW LS-NUN-T2 Dust Collector


Special Features



Low Volume High Mix




Auto Pin Place & Return



Smart Vision Programming



Active Brush System



Smart Bit Mileage




Auto Table Cleaning



Dual Ionizer

Options



ATC



Bit Diameter Detect



Auto Brush Change System



Cutting Inspection



MES Interface

UNIVERSAL Off-Line Router Powered by Checkmate®

NEW

cDPL-S
Checkmate



Special Features



Low Volume High Mix



Auto Pin Place & Return



Smart Vision Programming



Active Brush System



Smart Bit Mileage



Auto Table Cleaning



Dual Ionizer

Options



ATC



Bit Diameter Detect



Auto Brush Change System



Cutting Inspection



MES Interface



Low Volume High Mix

cDPL-S is a model designed for low volume and high mix production due to its characteristics. Being jig-less, it also leads to lower running costs.

cDPL-S
Checkmate



nDPL-T

mDPL-T

nDPL-S

cDPL-S

iDPL-T

iDPL-S

iDPL-U

iDPL-C

iDPL-D

nDPL-TW

iDPL-TW

LS-NUN-T2

Dust Collector

Special Features



Low Volume High Mix



Auto Pin Place & Return



Smart Vision
Programming



Active Brush System



Smart Bit Mileage



Auto Table Cleaning



Dual Ionizer

Options



ATC



Bit Diameter Detect



Auto Brush Change System



Cutting Inspection



MES Interface

Auto Pin Place & Return

Automatic Pin Placement & Return with Robust Magnet Pins by Checkmate Technology.



cDPL-S
Checkmate



nDPL-T mDPL-T nDPL-S **cDPL-S** iDPL-T iDPL-S iDPL-U iDPL-C iDPL-D nDPL-TW iDPL-TW LS-NUN-T2 Dust Collector


Special Features



Low Volume High Mix



Auto Pin Place & Return



Smart Vision Programming



Active Brush System



Smart Bit Mileage



Auto Table Cleaning



Dual Ionizer

Options



ATC



Bit Diameter Detect




Auto Brush Change System



Cutting Inspection



MES Interface

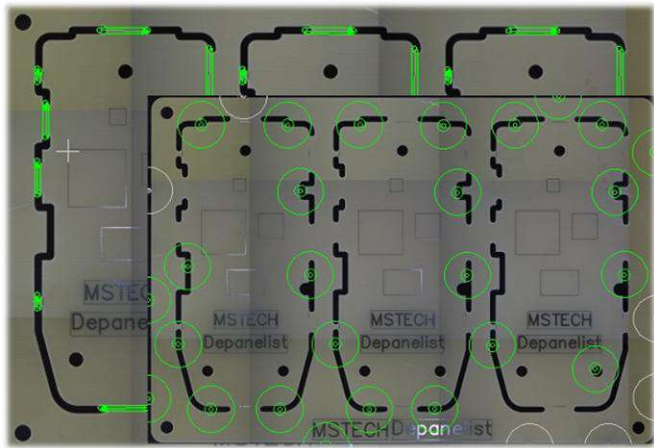

Smart Vision Programming by Checkmate

Smart Programming by Image Scan, Edge Detection, and Off-Line Programming

cDPL-S
Checkmate



nDPL-T

mDPL-T

nDPL-S

cDPL-S

iDPL-T

iDPL-S

iDPL-U

iDPL-C

iDPL-D

nDPL-TW

iDPL-TW

LS-NUN-T2

Dust Collector

Special Features



Low Volume High Mix



Auto Pin Place & Return



Smart Vision
Programming



Active Brush System



Smart Bit Mileage



Auto Table Cleaning



Dual Ionizer

Options



ATC



Bit Diameter Detect



Auto Brush Change System



Cutting Inspection



MES Interface



Active Brush System

Active Brush System for zero dust and to support PCB fixation.

cDPL-S
Checkmate



nDPL-T mDPL-T nDPL-S **cDPL-S** iDPL-T iDPL-S iDPL-U iDPL-C iDPL-D nDPL-TW iDPL-TW LS-NUN-T2 Dust Collector

Special Features



Low Volume High Mix




Auto Pin Place & Return



Smart Vision Programming



Active Brush System



Smart Bit Mileage



Auto Table Cleaning



Dual Ionizer

Options



ATC



Bit Diameter Detect



Auto Brush Change System




Cutting Inspection



MES Interface

cDPL-S
Checkmate

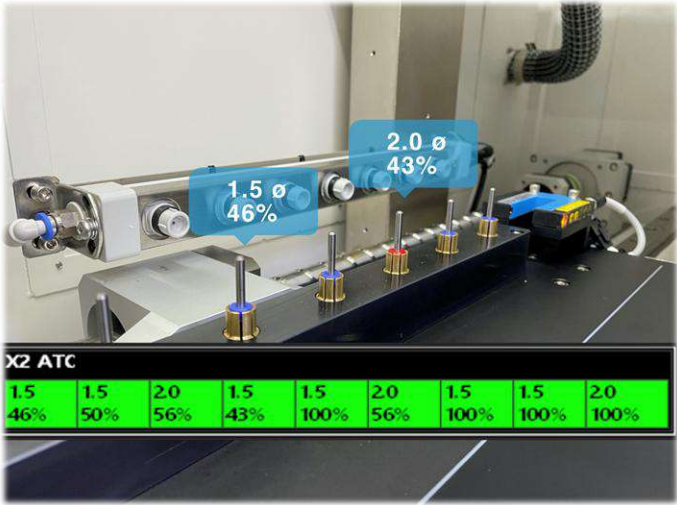

Bit Mileage Resume

Total Tool Management with Bit Mileage Resume

*Function to store bit mileage and reuse bits that have not reached the end of their lifespan.



Special Features



Low Volume High Mix



Auto Pin Place & Return



Smart Vision Programming



Active Brush System



Smart Bit Mileage



Auto Table Cleaning



Dual Ionizer

Options



ATC



Bit Diameter Detect



Auto Brush Change System



Cutting Inspection



MES Interface



Auto Table Cleaning

Automatic Table Cleaning offers a practical and efficient function to users and keeps the table clean.

cDPL-S
Checkmate



Special Features



Low Volume High Mix



Auto Pin Place & Return



Smart Vision Programming



Active Brush System



Smart Bit Mileage



Auto Table Cleaning



Dual Ionizer

Options



ATC



Bit Diameter Detect



Auto Brush Change System



Cutting Inspection



MES Interface



Dual Ionizer System

Powerful two dual ionizer located in left and right remove the dust effectively.

cDPL-S
Checkmate



Special Features



Low Volume High Mix



Auto Pin Place & Return



Smart Vision Programming



Active Brush System



Smart Bit Mileage



Auto Table Cleaning



Dual Ionizer

Options



ATC



Bit Diameter Detect




Auto Brush Change System



Cutting Inspection



MES Interface

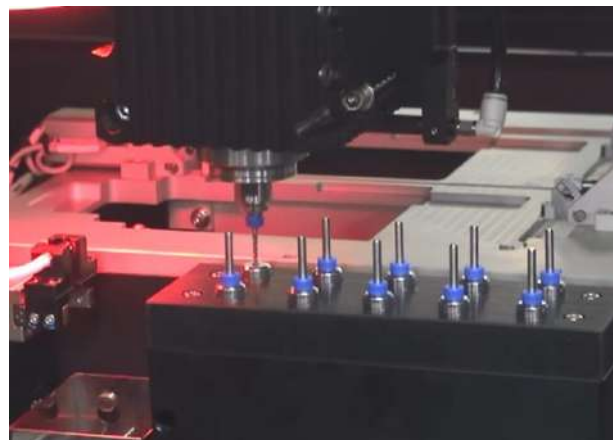

ATC (Automatic Tool Change)

- When the bit reaches the end of its lifetime or is broken, it is automatically replaced.
- Bit Rack Included.
- The bit rack holds 4 bits per table.
- 500W Spindle Motor is standard for cDPL-S

cDPL-S
Checkmate



Special Features



Low Volume High Mix



Auto Pin Place & Return



Smart Vision Programming



Active Brush System



Smart Bit Mileage



Auto Table Cleaning



Dual Ionizer

Options



ATC



Bit Diameter Detect



Auto Brush Change System



Cutting Inspection



MES Interface



Bit Diameter Detect

By using bit diameter detection, it prevents the operators mistake which will cause the damage of PCB

cDPL-S
Checkmate



Special Features



Low Volume High Mix



Auto Pin Place & Return



Smart Vision Programming



Active Brush System



Smart Bit Mileage



Auto Table Cleaning



Dual Ionizer

Options



ATC



Bit Diameter Detect



Auto Brush Change



Cutting Inspection



MES Interface



Auto Brush Change System

Automatic Brush Change System helps to keep the brush clean

cDPL-S
Checkmate



nDPL-TmDPL-TnDPL-S**cDPL-S**iDPL-TiDPL-SiDPL-UiDPL-CiDPL-DnDPL-TWiDPL-TWLS-NUN-T2Dust Collector

Special Features



Low Volume High Mix



Auto Pin Place & Return



Smart Vision
Programming



Active Brush System



Smart Bit Mileage



Auto Table Cleaning



Dual Ionizer

Options



ATC



Bit Diameter Detect



Auto Brush Change System



Cutting Inspection



MES Interface

Setup Cutting Quality

PCB	Point	Bridge	Direct...	Inspect	Result	Over Cut (0.100)	Under Cut (0.100)
1	11	1	R	ON	-	+0.000	+0.000
1	3	2	R	ON	-	+0.000	+0.000
1	5	3	R	ON	-	+0.000	+0.000
1	7	4	R	ON	-	+0.000	+0.000
1	9	5	R	ON	-	+0.000	+0.000
1	11	6	R	ON	-	+0.000	+0.000
1	13	7	R	ON	-	+0.000	+0.000
1	15	8	R	ON	-	+0.000	+0.000
1	17	9	R	ON	-	+0.000	+0.000
2	1	10	R	ON	-	+0.000	+0.000
2	3	11	R	ON	-	+0.000	+0.000
2	5	12	R	ON	-	+0.000	+0.000
2	7	13	R	ON	-	+0.000	+0.000
2	9	14	R	ON	-	+0.000	+0.000
2	11	15	R	ON	-	+0.000	+0.000
2	13	16	R	ON	-	+0.000	+0.000
2	15	17	R	ON	-	+0.000	+0.000
2	17	18	R	ON	-	+0.000	+0.000
3	1	19	R	ON	-	+0.000	+0.000
3	3	20	R	ON	-	+0.000	+0.000
3	5	21	R	ON	-	+0.000	+0.000
3	7	22	R	ON	-	+0.000	+0.000
3	9	23	R	ON	-	+0.000	+0.000
3	11	24	R	ON	-	+0.000	+0.000
3	13	25	R	ON	-	+0.000	+0.000

Operation and Setting

PrevNextPrevMoveNextSave Only NG Image

Setup Vision...PrevInspectNextAll Inspect

Setup PCB Direction...All ONAll OFFEdit Insp. Target...

Result Image

BiggerFit to Screen

Inspect Method

After All Cutting

X1: 0.000 X2: 0.000 Y: 375.000 Z: 0.000

이 검사 결과에 따라 NG PCB가 발생하며, 이 PCB는 NG PCB로 분류됩니다.

NG PCB는 NG PCB로 분류되며, 이 PCB는 NG PCB로 분류됩니다.

이 PCB는 NG PCB로 분류되며, 이 PCB는 NG PCB로 분류됩니다.

이 PCB는 NG PCB로 분류되며, 이 PCB는 NG PCB로 분류됩니다.

Cutting Inspection

- Detect NG cutting PCBs by Vision System

cDPL-S
Checkmate



Special Features



Low Volume High Mix



Auto Pin Place & Return



Smart Vision Programming



Active Brush System



Smart Bit Mileage



Auto Table Cleaning



Dual Ionizer

Options



ATC



Bit Diameter Detect



Auto Brush Change System



Cutting Inspection



MES Interface



Barcode Interlock & MES Interface

Barcodes are recognized to perform MES functions and integrate efficiently with the customer's network.

KEYENCE SR-X100W Standard
COGNEX Upon Request



cDPL-S
Checkmate



Special Features




Twin Table



Dual Spindle



Dual Transfer



Vision System



Auto Conveyor Width



Tooling ID Recognition



Dust Collector



Visual Data Log System

Options



Shuttle Pallet



Edge Belt




Pallet Transport



Tray Function



NG Conveyor



Cutting Inspection



Tool Verify



Post Clean

TWIN Table
In-Line Router


iDPL-T
Depanelist



Special Features



Twin Table



Dual Spindle



Dual Transfer



Vision System



Auto Conveyor Width



Tooling ID Recognition



Dust Collector



Visual Data Log System

Options



Shuttle Pallet




Edge Belt



Pallet Transport



Tray Function



NG Conveyor



Cutting Inspection



Tool Verify



Post Clean



Twin Table In-Line Router

By applying dual tables, idle time is minimized, enabling higher performance. Additionally, it offers high C/T and versatility as advantages.

*Standard Size: 300 x 350 mm / 350 x 400 mm

iDPL-T
Depanelist



Special Features



Twin Table



Dual Spindle



Dual Transfer



Vision System



Auto Conveyor Width



Tooling ID Recognition



Dust Collector



Visual Data Log System

Options



Shuttle Pallet




Edge Belt



Pallet Transport



Tray Function



NG Conveyor



Cutting Inspection



Tool Verify



Post Clean

Dual Spindle Head & AWA

Equipped with dual spindle heads as standard, allowing for high cutting speed and performance. The spindle width is automatically adjusted according to the model. (3-4 spindles option available)

*Using 2 Head Sycotec 250W as a standard. (500W: Option)

*Optional: ATC

*Single Spindle head is available for cost saving.

*Compared to a single-head system, it reduces operator demand and lower overall costs.

*AWA: Automatic Width Adjustment

*ATC: Auto Tool Change


iDPL-T
Depanelist



Special Features



Twin Table



Dual Spindle



Dual Transfer



Vision System



Auto Conveyor Width



Tooling ID Recognition



Dust Collector



Visual Data Log System

Options



Shuttle Pallet




Edge Belt



Pallet Transport



Tray Function



NG Conveyor



Cutting Inspection



Tool Verify



Post Clean

Dual Transfer (Individual Loader & Unloader)

Cartridge type vacuum ports are applied to the loader and unloader, enabling quick and easy model changes.

- *Fast One-Touch Changeover
- **Standard: Vacuum Nozzle
- **Mechanical Gripper Available(Optional)



iDPL-T
Depanelist



nDPL-T mDPL-T nDPL-S cDPL-S iDPL-T iDPL-S iDPL-U iDPL-C iDPL-D nDPL-TW iDPL-TW LS-NUN-T2 Dust Collector

Special Features




Twin Table



Dual Spindle



Dual Transfer



Vision System



Auto Conveyor Width



Tooling ID Recognition



Dust Collector



Visual Data Log System

Options



Shuttle Pallet



Edge Belt



Pallet Transport



Tray Function



NG Conveyor



Cutting Inspection



Tool Verify



Post Clean



Vision System for Fiducial Check

By using the vision system, fiducial mark check is available


iDPL-T
Depanelist



Special Features



Twin Table



Dual Spindle



Dual Transfer



Vision System



Auto Conveyor Width



Tooling ID Recognition



Dust Collector



Visual Data Log System

Options



Shuttle Pallet



Edge Belt



Pallet Transport



Tray Function



NG Conveyor



Cutting Inspection



Tool Verify



Post Clean

Auto Conveyor Width Adjustment

By using servo motors, width values are stored to reduce model changeover time.
Also, the purpose of buffer can be achieved.



iDPL-T
Depanelist



nDPL-T

mDPL-T

nDPL-S

cDPL-S

iDPL-T

iDPL-S

iDPL-U

iDPL-C

iDPL-D

nDPL-TW

iDPL-TW


LS-NUN-T2

Dust Collector

Special Features



Twin Table



Dual Spindle



Dual Transfer



Vision System



Auto Conveyor Width



Tooling ID Recognition



Dust Collector



Visual Data Log System

Options



Shuttle Pallet



Edge Belt




Pallet Transport



Tray Function



NG Conveyor



Cutting Inspection



Tool Verify



Post Clean



Tooling ID Recognition

By using tooling ID recognition, incorrect tooling assembly can be prevented

*Standard: 3 Sensors

iDPL-T


Depanelist



Special Features



Twin Table



Dual Spindle



Dual Transfer



Vision System



Auto Conveyor Width



Tooling ID Recognition



Dust Collector



Visual Data Log System

Options



Shuttle Pallet



Edge Belt



Pallet Transport



Tray Function



NG Conveyor



Cutting Inspection



Tool Verify



Post Clean



Easy Handling Dust Collector

By using Easy Handling Dust Collector, operator can remove the dust bag easily and safely. (Continuous liner type bag)

*2HP Standard

*5HP / Hepa Filter Optional

iDPL-T
Depanelist




nDPL-T mDPL-T nDPL-S cDPL-S iDPL-T iDPL-S iDPL-U iDPL-C iDPL-D nDPL-TW iDPL-TW LS-NUN-T2 Dust Collector

Special Features



Twin Table



Dual Spindle



Dual Transfer



Vision System



Auto Conveyor Width



Tooling ID Recognition



Dust Collector



Visual Data Log System

Options



Shuttle Pallet



Edge Belt



Pallet Transport



Tray Function



NG Conveyor



Cutting Inspection



Tool Verify



Post Clean



Visual Data Log System

By using the Visual Data Log System(DVR / 4 Channel), issues during the production process can be identified, and the production process can be monitored in real time.




iDPL-T
Depanelist



Special Features



Twin Table



Dual Spindle



Dual Transfer



Vision System



Auto Conveyor Width



Tooling ID Recognition



Dust Collector



Visual Data Log System

Options



Shuttle Pallet



Edge Belt



Pallet Transport



Tray Function



NG Conveyor



Cutting Inspection



Tool Verify



Post Clean

Shuttle Pallet Outlet

PCBs are released by placing them on the shuttle jig for automation of the next equipment. To ensure proper placement, a PCB detection sensor is installed.

*Dual Shuttle(Optional)



iDPL-T
Depanelist



nDPL-T mDPL-T nDPL-S cDPL-S **iDPL-T** iDPL-S iDPL-U iDPL-C iDPL-D nDPL-TW iDPL-TW LS-NUN-T2 Dust Collector

Special Features



Twin Table



Dual Spindle



Dual Transfer



Vision System



Auto Conveyor Width



Tooling ID Recognition



Dust Collector



Visual Data Log System

Options



Shuttle Pallet



Edge Belt



Pallet Transport



Tray Function



NG Conveyor



Cutting Inspection



Tool Verify



Post Clean



Edge Belt Conveyor Outlet

Cut PCB can be disposed of via the edge belt conveyor outlet to the next machine. Additionally, auto width adjustment is applied to match the PCB size.

iDPL-T

Depanelist



Special Features



Twin Table



Dual Spindle



Dual Transfer



Vision System



Auto Conveyor Width



Tooling ID Recognition



Dust Collector



Visual Data Log System

Options



Shuttle Pallet



Edge Belt



Pallet Transport



Tray Function



NG Conveyor



Cutting Inspection



Tool Verify



Post Clean



Pallet Transport System

After cutting, the PCB is released and seated on the AL(Aluminum) pallet provided by the customer.


iDPL-T
Depanelist



Special Features



Twin Table



Dual Spindle



Dual Transfer



Vision System



Auto Conveyor Width



Tooling ID Recognition



Dust Collector



Visual Data Log System

Options



Shuttle Pallet




Edge Belt



Pallet Transport



Tray Function



NG Conveyor



Cutting Inspection



Tool Verify



Post Clean

Auto Tray Function

The cut PCB is automatically loaded into a tray or slot box. When the tray or slot box is full, it is automatically changed and stacked.

*The purpose of multi buffer(1+2) can be achieved

**Elevator Axis for the tray exist




iDPL-T
Depanelist



Special Features



Twin Table



Dual Spindle



Dual Transfer



Vision System



Auto Conveyor Width



Tooling ID Recognition



Dust Collector



Visual Data Log System

Options



Shuttle Pallet



Edge Belt



Pallet Transport



Tray Function



NG Conveyor



Cutting Inspection




Tool Verify



Post Clean

NG Conveyor for OK/NG Separation

Separating OK/NG PCBs to enhance production process efficiency. Defective PCBs will be recorded in the MES.

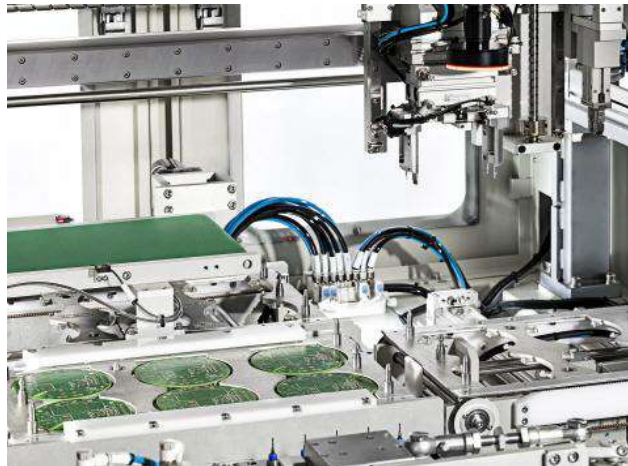


iDPL-T
Depanelist



Special Features



Twin Table



Dual Spindle



Dual Transfer



Vision System



Auto Conveyor Width



Tooling ID Recognition



Dust Collector



Visual Data Log System

Options



Shuttle Pallet




Edge Belt




Pallet Transport



Tray Function



NG Conveyor



Cutting Inspection



Tool Verify




Post Clean

Cutting Inspection

- Detect NG cutting PCBs by Camera.
- Vision System upgrade required.

*Single, Flying type Cutting Inspection

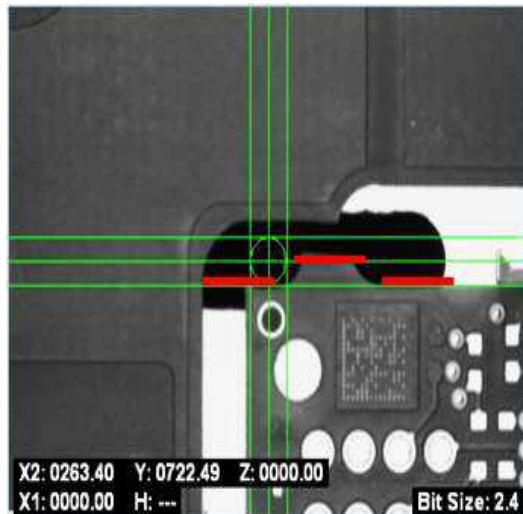


iDPL-T
Depanelist



Special Features



Twin Table



Dual Spindle



Dual Transfer



Vision System



Auto Conveyor Width



Tooling ID Recognition



Dust Collector



Visual Data Log System

Options



Shuttle Pallet




Edge Belt



Pallet Transport



Tray Function



NG Conveyor



Cutting Inspection



Tool Verify




Post Clean

Tool Verification

It verifies whether the appropriate bit is installed.

- * ATC required
- **Bit Diameter Detection(Optional)
- ***Bit Color Ring Detection(Optional)

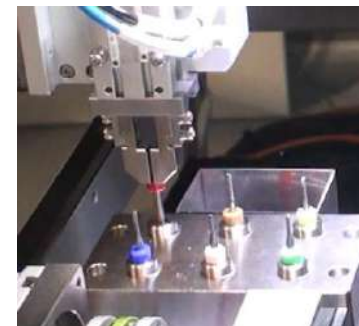

iDPL-T Depanelist



nDPL-T

mDPL-T

nDPL-S

cDPL-S

iDPL-T

iDPL-S

iDPL-U

iDPL-C

iDPL-D

nDPL-TW

iDPL-TW

LS-NUN-T2

Dust Collector

Special Features



Twin Table



Dual Spindle



Dual Transfer



Vision System



Auto Conveyor Width



Tooling ID Recognition



Dust Collector



Visual Data Log System

Options



Shuttle Pallet



Edge Belt



Pallet Transport



Tray Function



NG Conveyor



Cutting Inspection



Tool Verify



Post Clean



Post Cleaning System

By installing a separate Post Cleaner Chamber, dust can be minimized thanks to its ultra-ionizing system, which operates separate cleaning for the upper and bottom sides, for removing the dust effectively.

iDPL-T

Depanelist



Special Features




Single Table



Dual Spindle



Dual Transfer



Vision System



Auto Conveyor Width



Tooling ID Recognition



Dust Collector

Options




Shuttle Pallet



Edge Belt



NG Conveyor



Cutting Inspection



Tool Verify

SINGLE Table In-Line Router



Special Features



Single Table



Dual Spindle



Dual Transfer



Vision System



Auto Conveyor Width



Tooling ID Recognition



Dust Collector

Options



Shuttle Pallet



Edge Belt



NG Conveyor



Cutting Inspection



Tool Verify

Single Table In-Line Router

- Compact Foot print
- Cost saving



Special Features



Single Table



Dual Spindle



Dual Transfer



Vision System



Auto Conveyor Width



Tooling ID Recognition



Dust Collector

Options



Shuttle Pallet



Edge Belt



NG Conveyor



Cutting Inspection



Tool Verify



Dual Spindle Head & AWA

Equipped with dual spindle heads as standard, allowing for high cutting speed and performance. The spindle width is automatically adjusted according to the model. (3-4 spindles option available)

- *Using 2 Head Sycotec 250W as a standard. (500W: Option)
- *Optional: ATC
- *Single Spindle head is available
- *Compared to a single-head system, it reduces operator demand and lower overall costs.
- *AWA: Automatic Width Adjustment
- *ATC: Auto Tool Change



Special Features



Single Table



Dual Spindle



Dual Transfer



Vision System



Auto Conveyor Width



Tooling ID Recognition



Dust Collector

Options



Shuttle Pallet



Edge Belt



NG Conveyor



Cutting Inspection



Tool Verify

Dual Transfer (Individual Loader & Unloader)

Cartridge type vacuum ports are applied to the loader and unloader, enabling quick and easy model changes.

- *Fast One-Touch Changeover
- **Standard: Vacuum Nozzle
- ***Mechanical Gripper Available(Optional)



Special Features




Single Table



Dual Spindle



Dual Transfer



Vision System



Auto Conveyor Width



Tooling ID Recognition



Dust Collector

Options



Shuttle Pallet



Edge Belt




NG Conveyor



Cutting Inspection



Tool Verify

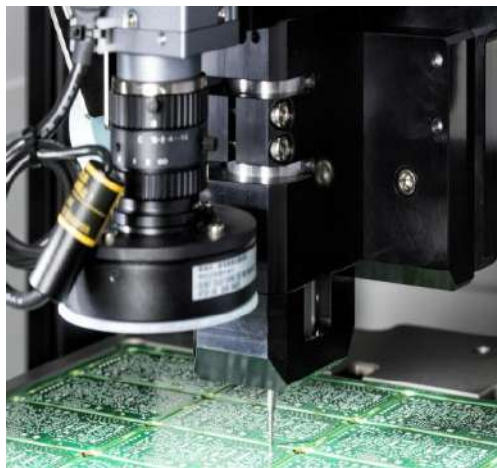

Vision System for Fiducial Check

By using the vision system, fiducial mark check is available



Special Features



Single Table



Dual Spindle



Dual Transfer



Vision System



Auto Conveyor Width



Tooling ID Recognition



Dust Collector

Options



Shuttle Pallet



Edge Belt



NG Conveyor



Cutting Inspection



Tool Verify

Auto Conveyor Width Adjustment

By using servo motors, width values are stored to reduce model changeover time.
Also, the purpose of buffer can be achieved.



Special Features



Single Table



Dual Spindle



Dual Transfer



Vision System



Auto Conveyor Width



Tooling ID Recognition



Dust Collector

Options



Shuttle Pallet



Edge Belt




NG Conveyor



Cutting Inspection



Tool Verify

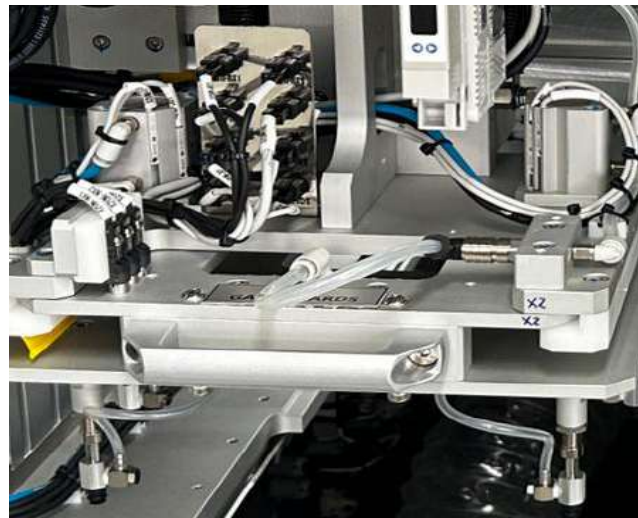

Tooling ID Recognition

By using tooling ID recognition, incorrect tooling assembly can be prevented

*Standard: 3 Sensors



Special Features



Single Table



Dual Spindle



Dual Transfer



Vision System



Auto Conveyor Width



Tooling ID Recognition



Dust Collector

Options



Shuttle Pallet



Edge Belt



NG Conveyor



Cutting Inspection



Tool Verify

iDPL-S
Depanelist



Easy Handling Dust Collector

By using Easy Handling Dust Collector, operator can remove the dust bag easily and safely. (Continuous liner type bag)

*5HP / Hepa Filter Optional



Special Features



Single Table



Dual Spindle



Dual Transfer



Vision System



Auto Conveyor Width



Tooling ID Recognition



Dust Collector

Options



Shuttle Pallet



Edge Belt



NG Conveyor



Cutting Inspection



Tool Verify

Shuttle Pallet Outlet

PCBs are released by placing them on the shuttle jig for automation of the next equipment. To ensure proper placement, a PCB detection sensor is installed.



nDPL-TmDPL-TnDPL-ScDPL-SiDPL-TiDPL-SiDPL-UiDPL-CiDPL-DnDPL-TWiDPL-TWLS-NUN-T2Dust Collector

Special Features



Single Table



Dual Spindle



Dual Transfer



Vision System



Auto Conveyor Width




Tooling ID Recognition



Dust Collector

Options



Shuttle Pallet



Edge Belt



NG Conveyor



Cutting Inspection



Tool Verify



Edge Belt Conveyor Outlet


Cut PCBs can be disposed of via the edge belt conveyor outlet to the next machine. Additionally, auto width adjustment is applied to match the PCB size.



Special Features



Single Table



Dual Spindle



Dual Transfer



Vision System



Auto Conveyor Width



Tooling ID Recognition



Dust Collector

Options



Shuttle Pallet



Edge Belt




NG Conveyor



Cutting Inspection



Tool Verify

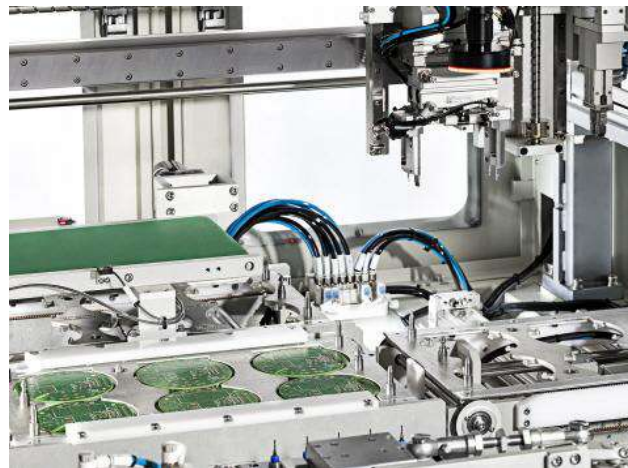

NG Conveyor for OK/NG Separation

Separating OK/NG PCBs to enhance production process efficiency. Defective PCBs will be recorded in the MES.



Special Features



Single Table



Dual Spindle



Dual Transfer



Vision System



Auto Conveyor Width



Tooling ID Recognition



Dust Collector

Options




Shuttle Pallet



Edge Belt



NG Conveyor



Cutting Inspection




Tool Verify

Cutting Inspection

- Detect NG cutting PCBs by Camera.
- Vision System upgrade required.

*Single, Flying type Cutting Inspection

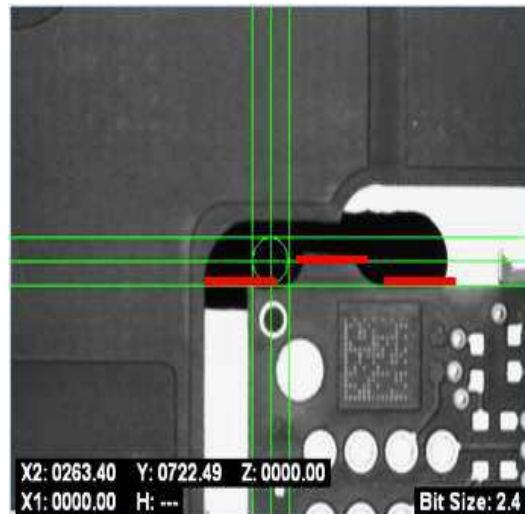

Special Features



Single Table



Dual Spindle



Dual Transfer



Vision System



Auto Conveyor Width



Tooling ID Recognition



Dust Collector

Options



Shuttle Pallet



Edge Belt



NG Conveyor



Cutting Inspection



Tool Verify

Tool Verification

It verifies whether the appropriate bit is installed.

*Bit Diameter Detection(Optional)

**Bit Color Ring Detection(Optional)



Special Features




Jig-Less Undercut




Gripper System



ATC



Vision System



Auto Conveyor Width



Gantry Robot



Visual Data Log System

Options



Shuttle Pallet



Edge Belt



Pallet Transport



Tray Function



NG Conveyor



Tool Verify



Post Clean

UNDER-CUT In-Line Router

iDPL-U
Depanelist



Special Features



Jig-Less Undercut



Gripper System



ATC



Vision System



Auto Conveyor Width



Gantry Robot



Visual Data Log System

Options



Shuttle Pallet




Edge Belt



Pallet Transport



Tray Function



NG Conveyor




Tool Verify



Post Clean

Jig-Less Undercut

Using grippers for PCB handling eliminates the need for jig production for each mode which leads the cost-saving. 4 gripper fingers securely hold the PCB, allowing cutting on the conveyor.

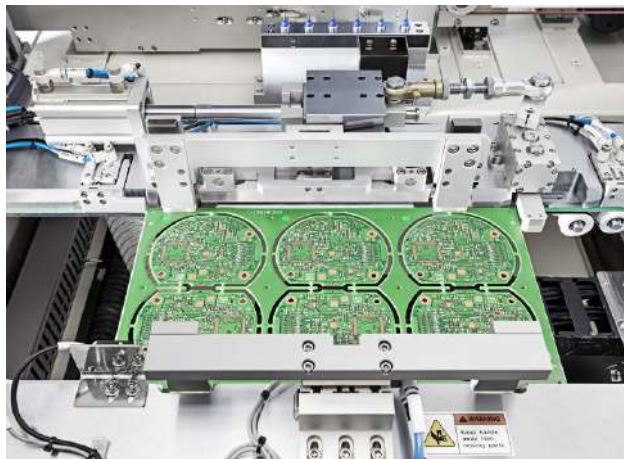

iDPL-U
Depanelist



Special Features



Jig-Less Undercut



Gripper System



ATC



Vision System



Auto Conveyor Width



Gantry Robot



Visual Data Log System

Options



Shuttle Pallet




Edge Belt



Pallet Transport



Tray Function



NG Conveyor



Tool Verify



Post Clean

Gripper System

Using the gripper system ensures the PCB is held securely.

Auto Gripper Pitch Adjustment(Optional)



iDPL-U
Depanelist



Special Features



Jig-Less Undercut



Gripper System



ATC



Vision System



Auto Conveyor Width



Gantry Robot



Visual Data Log System

Options



Shuttle Pallet




Edge Belt



Pallet Transport



Tray Function



NG Conveyor




Tool Verify



Post Clean

ATC (Automatic Tool Change)

- When the bit reaches the end of its lifetime or is broken, it is automatically replaced.
- Dedicated Bit Rack Included.
- Bit Broken Detect

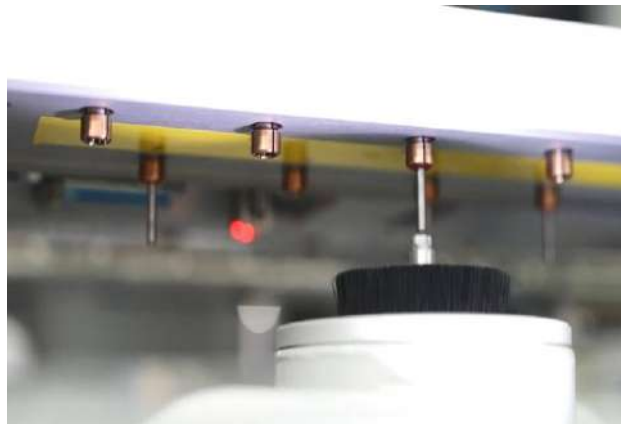

iDPL-U
Depanelist



Special Features




Jig-Less Undercut



Gripper System



ATC



Vision System



Auto Conveyor Width



Gantry Robot



Visual Data Log System

Options



Shuttle Pallet




Edge Belt



Pallet Transport



Tray Function




NG Conveyor



Tool Verify



Post Clean

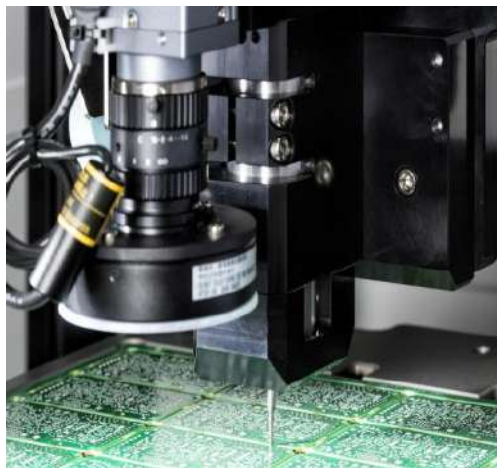

Vision System for Fiducial Check

By using the vision system, fiducial mark check is available

iDPL-U
Depanelist



Special Features



Jig-Less Undercut




Gripper System



ATC



Vision System



Auto Conveyor Width



Gantry Robot



Visual Data Log System

Options



Shuttle Pallet




Edge Belt



Pallet Transport



Tray Function



NG Conveyor



Tool Verify



Post Clean

Auto Conveyor Width Adjustment

Using motors, width values are stored to reduce model changeover time.
Also, the purpose of buffer can be achieved.



iDPL-U
Depanelist



Special Features



Jig-Less Undercut



Gripper System



ATC



Vision System



Auto Conveyor Width



Gantry Robot



Visual Data Log System

Options



Shuttle Pallet




Edge Belt



Pallet Transport



Tray Function



NG Conveyor



Tool Verify



Post Clean

Gantry Robot

Swiftly deliver PCBs using a gantry robot with a high degree of freedom in its axes.



iDPL-U
Depanelist



Special Features



Jig-Less Undercut



Gripper System



ATC



Vision System



Auto Conveyor Width



Gantry Robot



Visual Data Log System

Options



Shuttle Pallet




Edge Belt



Pallet Transport



Tray Function



NG Conveyor



Tool Verify



Post Clean

Visual Data Log System

By using the Visual Data Log System(DVR / 4 Channel), issues during the production process can be identified, and the production process can be monitored in real time.



iDPL-U
Depanelist



Depanelist

Special Features



Jig-Less Undercut



Gripper System



ATC



Vision System



Auto Conveyor Width



Gantry Robot



Visual Data Log System

Options



Shuttle Pallet




Edge Belt



Pallet Transport



Tray Function



NG Conveyor



Tool Verify



Post Clean

Shuttle Pallet Outlet

PCBs are released by placing them on the shuttle jig for automation of the next equipment. To ensure proper placement, a PCB detection sensor is installed.



iDPL-U
Depanelist



Depanelist

Special Features



Jig-Less Undercut



Gripper System



ATC



Vision System



Auto Conveyor Width




Gantry Robot



Visual Data Log System

Options



Shuttle Pallet




Edge Belt



Pallet Transport



Tray Function



NG Conveyor



Tool Verify



Post Clean



Edge Belt Conveyor Outlet

Cut PCBs can be disposed of via the edge belt conveyor outlet to the next machine. Additionally, auto width adjustment is applied to match the PCB size.

iDPL-U
Depanelist



Special Features



Jig-Less Undercut



Gripper System



ATC



Vision System



Auto Conveyor Width



Gantry Robot



Visual Data Log System

Options



Shuttle Pallet




Edge Belt



Pallet Transport



Tray Function



NG Conveyor



Tool Verify



Post Clean

Pallet Transport System

After cutting, the PCB is released and seated on the AL(Aluminum) pallet provided by the customer.



iDPL-U
Depanelist



Special Features



Jig-Less Undercut



Gripper System



ATC



Vision System



Auto Conveyor Width



Gantry Robot



Visual Data Log System

Options



Shuttle Pallet




Edge Belt



Pallet Transport



Tray Function



NG Conveyor



Tool Verify



Post Clean

Auto Tray Function

The cut PCB is automatically loaded into a tray or slot box. When the tray or slot box is full, it is automatically changed and stacked.

*The purpose of multi buffer(1+2) can be achieved

**Elevator Axis for the tray exist



iDPL-U
Depanelist



Depanelist

Special Features



Jig-Less Undercut



Gripper System



ATC



Vision System



Auto Conveyor Width



Gantry Robot



Visual Data Log System

Options



Shuttle Pallet




Edge Belt



Pallet Transport



Tray Function



NG Conveyor




Tool Verify



Post Clean

NG Conveyor for OK/NG Separation

Separating OK/NG PCBs to enhance production process efficiency. Defective PCBs will be recorded in the MES.

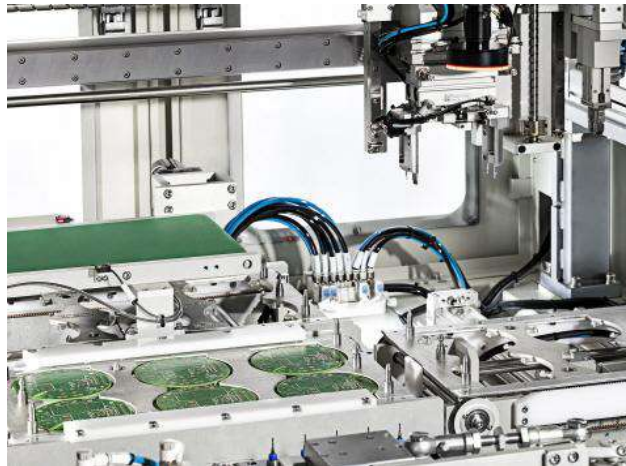

iDPL-U
Depanelist



Special Features



Jig-Less Undercut



Gripper System



ATC



Vision System



Auto Conveyor Width



Gantry Robot



Visual Data Log System

Options



Shuttle Pallet




Edge Belt



Pallet Transport



Tray Function



NG Conveyor



Tool Verify



Post Clean

Tool Verification

It verifies whether the appropriate bit is installed.

- * ATC required
- **Bit Diameter Detection(Optional)
- ***Bit Color Ring Detection(Optional)



iDPL-U
Depanelist



Depanelist

Special Features



Jig-Less Undercut



Gripper System



ATC



Vision System



Auto Conveyor Width



Gantry Robot



Visual Data Log System

Options



Shuttle Pallet




Edge Belt



Pallet Transport



Tray Function



NG Conveyor



Tool Verify



Post Clean



Post Cleaning System

By installing a separate Post Cleaner Chamber, dust can be minimized thanks to its ultra-ionizing system, which operates separate cleaning for the upper and bottom sides, significantly reducing the PCB defect rate.


iDPL-U
Depanelist



Special Features



Simple In-Line



Universal Stopper



Auto Conveyor Width



ATC



Vision System



Dust Free




Compact Footprint

Options




Cobot Integration



Cutting Inspection



Tool Verify



Input Buffer

SIMPLE In-Line Router

iDPL-C
Depanelist



Special Features



Simple In-Line



Universal Stopper



Auto Conveyor Width



ATC



Vision System



Dust Free



Compact Footprint

Options



Cobot Integration



Cutting Inspection




Tool Verify



Input Buffer

Simple In-Line

iDPL-C is the simplest in-line router, dedicated solution for vertically cut PCB panels and panels without frames.

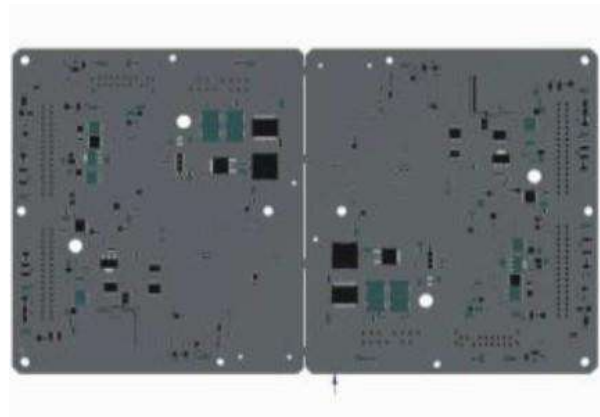


iDPL-C
Depanelist



Special Features



Simple In-Line



Universal Stopper



Auto Conveyor Width



ATC



Vision System



Dust Free



Compact Footprint

Options



Cobot Integration



Cutting Inspection




Tool Verify



Input Buffer

Universal Stopper

The Universal Stopper ensures precise positioning of the PCB at the cutting point for vertically cut PCB panels. This stopper can be adjusted for PCBs of the same shape.

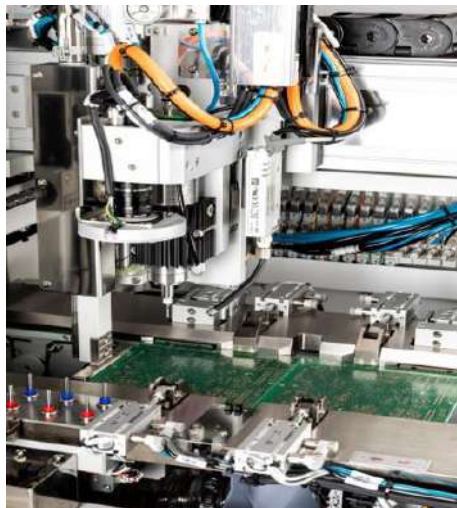

iDPL-C
Depanelist



Special Features



Simple In-Line



Universal Stopper



Auto Conveyor Width



ATC



Vision System



Dust Free



Compact Footprint

Options



Cobot Integration



Cutting Inspection



Tool Verify



Input Buffer

Auto Conveyor Width Adjustment

By using servo motors, width values are stored to reduce model changeover time.
Also, the purpose of buffer can be achieved.



iDPL-C
Depanelist



Special Features



Simple In-Line



Universal Stopper



Auto Conveyor Width



ATC



Vision System



Dust Free



Compact Footprint

Options



Cobot Integration




Cutting Inspection



Tool Verify



Input Buffer

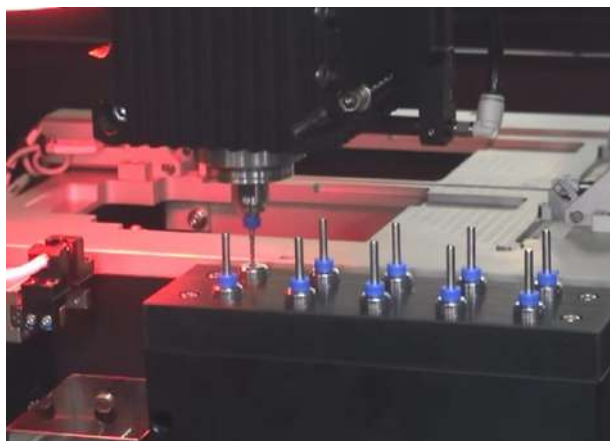

ATC (Automatic Tool Change)

- When the bit reaches the end of its lifetime or is broken, it is automatically replaced.
- Upgrade 500W spindle required.
- Bit Rack Included.
- Bit Broken Detect Included

iDPL-C
Depanelist



Special Features



Simple In-Line




Universal Stopper



Auto Conveyor Width



ATC



Vision System



Dust Free



Compact Footprint

Options



Cobot Integration




Cutting Inspection



Tool Verify



Input Buffer

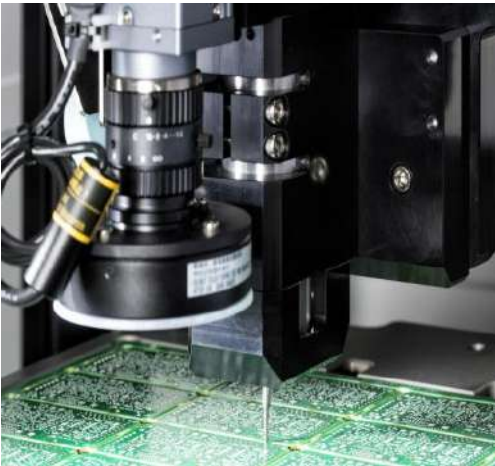

Vision System for Fiducial Check

By using the vision system, fiducial mark check is available

iDPL-C
Depanelist



Special Features



Simple In-Line



Universal Stopper



Auto Conveyor Width



ATC



Vision System



Dust Free



Compact Footprint

Options



Cobot Integration



Cutting Inspection




Tool Verify



Input Buffer

Dust Free

The specially designed dust suction unit for the iDPL-C effectively removes PCB dust through local exhaust.

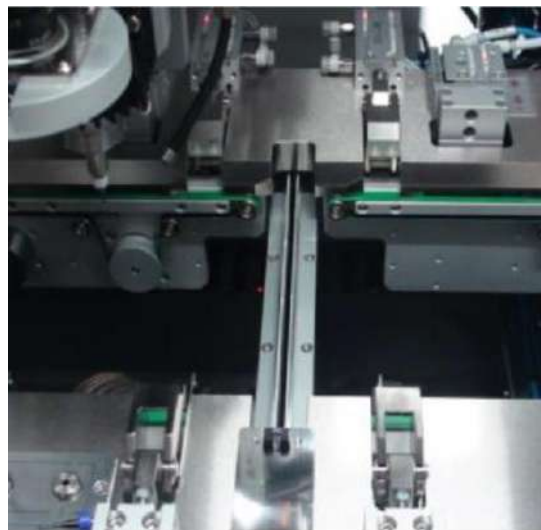

iDPL-C
Depanelist



Special Features



Simple In-Line



Universal Stopper



Auto Conveyor Width



ATC



Vision System



Dust Free



Compact Footprint

Options



Cobot Integration



Cutting Inspection



Tool Verify



Input Buffer

iDPL-C
Depanelist



Compact Design

Save space for the user with the most compact design available.

nDPL-TmDPL-TnDPL-ScDPL-SiDPL-TiDPL-SiDPL-UiDPL-CiDPL-DnDPL-TWiDPL-TWLS-NUN-T2Dust Collector

Special Features



Simple In-Line



Universal Stopper



Auto Conveyor Width



ATC



Vision System



Dust Free



Compact Footprint

Options



Cobot Integration



Cutting Inspection



Tool Verify



Input Buffer



Cobot(Robot) Integration

Integration with cobots or robots available

iDPL-C
Depanelist



Special Features



Simple In-Line



Universal Stopper



Auto Conveyor Width



ATC



Vision System



Dust Free




Compact Footprint

Options



Cobot Integration



Cutting Inspection




Tool Verify



Input Buffer

Cutting Inspection

- Detect NG cutting PCBs by Camera(Single type Inspection)
- Vision System upgrade required.

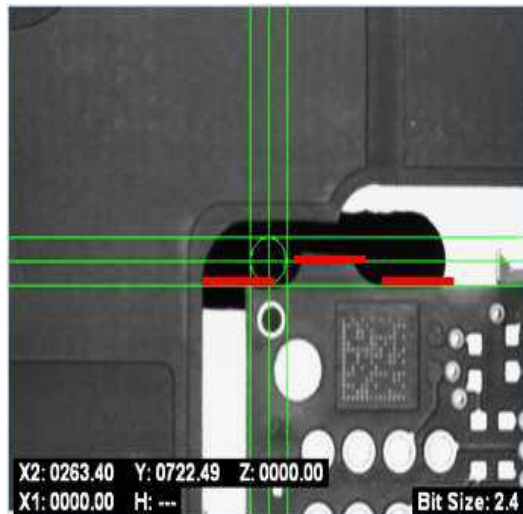

iDPL-C
Depanelist



Special Features



Simple In-Line



Universal Stopper



Auto Conveyor Width



ATC



Vision System



Dust Free



Compact Footprint

Options



Cobot Integration



Cutting Inspection



Tool Verify




Input Buffer

Tool Verification

It verifies whether the appropriate bit is installed.

- * ATC required
- **Bit Diameter Detection/Bit Color Ring Detection

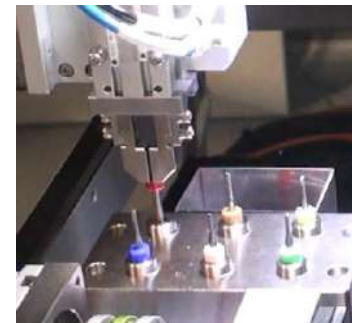

iDPL-C Depanelist



Special Features



Simple In-Line



Universal Stopper



Auto Conveyor Width



ATC



Vision System



Dust Free



Compact Footprint

Options



Cobot Integration



Cutting Inspection



Tool Verify



Input Buffer



Input Buffer Conveyor

The purpose of buffer can be achieved by using the Input Buffer Conveyor

iDPL-C
Depanelist



Special Features



Dual Station



Dual Lane



Dual Aligner



4 Spindle & AWA(x2)



Dual Transfers(x2)



Scrap Conveyor(x2)



Compact Footprint

DUAL In-Line Router

iDPL-D
Depanelist



Special Features



Sawing System



Twin Tables



Dual Dust Removal



Head Rotation



Vision System



3HP Dust Collector

Options



Auto Scrap Pickup



Fixture ID Recognition

TWIN Table Off-Line Sawing

nDPL-TW(SW)
Depanelist



Special Features




Sawing System



Twin Tables



Dual Dust Removal



Head Rotation



Vision System



3HP Dust Collector


Options



Auto Scrap Pickup



Fixture ID Recognition

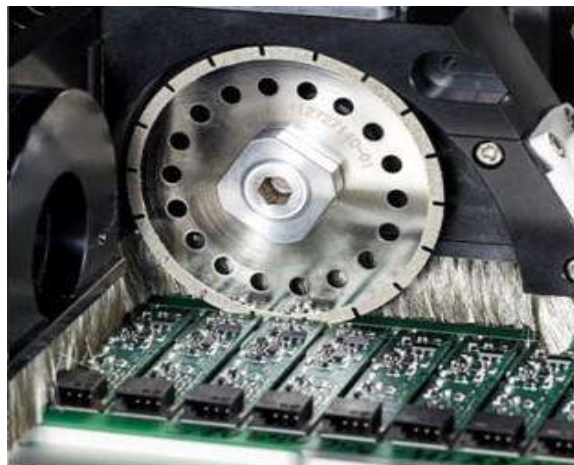

Sawing System

By utilizing the sawing system, it is suitable for PCBs with a long-line cutting design and uses a diamond-coated saw blade for cutting.

nDPL-TW(SW)
Depanelist



Special Features



Sawing System



Twin Tables



Dual Dust Removal



Head Rotation




Vision System



3HP Dust Collector

Options



Auto Scrap Pickup



Fixture ID Recognition



Twin Tables (or Single Table)

Provide Twin Table for Minimizing Idle Time.



nDPL-TW(SW)
Depanelist



Special Features




Sawing System



Twin Tables



Dual Dust Removal



Head Rotation



Vision System



3HP Dust Collector

Options



Auto Scrap Pickup



Fixture ID Recognition



Dual Simultaneous Dust Removal

Perfect dust removal is achieved through simultaneous upper and lower dust suction.

nDPL-TW(SW)
Depanelist



Special Features




Sawing System



Twin Tables



Dual Dust Removal



Head Rotation



Vision System



3HP Dust Collector


Options



Auto Scrap Pickup



Fixture ID Recognition

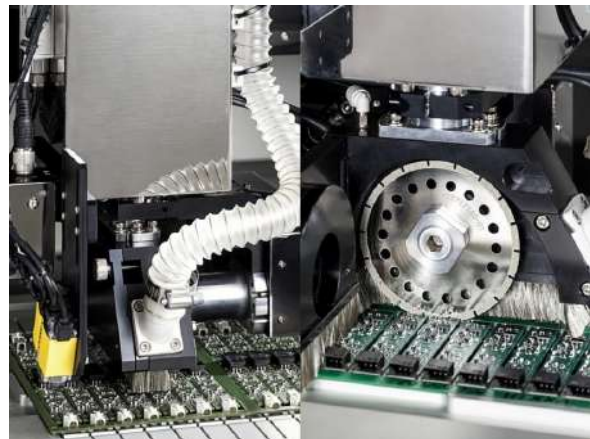

Sawing Head Rotation

By mounting a rotary motor on the cutting head, bidirectional cutting in both horizontal and vertical directions is possible.

*Rotating degree : 90°

nDPL-TW(SW)
Depanelist



Special Features



Sawing System



Twin Tables



Dual Dust Removal



Head Rotation




Vision System



3HP Dust Collector

Options



Auto Scrap Pickup



Fixture ID Recognition



Vision System for Fiducial Check

By using the vision system, fiducial mark check is available

nDPL-TW(SW)
Depanelist



Special Features




Sawing System



Twin Tables



Dual Dust Removal



Head Rotation



Vision System



3HP Dust Collector

Options



Auto Scrap Pickup



Fixture ID Recognition



3HP Dust Collector

A 3-horsepower dust collector is provided as standard.

5HP(Optional)

nDPL-TW(SW)
Depanelist



Special Features




Sawing System



Twin Tables



Dual Dust Removal



Head Rotation



Vision System



3HP Dust Collector

Options



Auto Scrap Pickup



Fixture ID Recognition



Auto Scrap Pickup System

Scraps are automatically disposed of after cutting.

*Cobot Integration



nDPL-TW(SW)
Depanelist



nDPL-T

mDPL-T

nDPL-S

cDPL-S

iDPL-T

iDPL-S

iDPL-U

iDPL-C

iDPL-D

nDPL-TW

iDPL-TW

LS-NUN-T2

Dust Collector

Special Features



Sawing System



Twin Tables



Dual Dust Removal



Head Rotation




Vision System



3HP Dust Collector

Options



Auto Scrap Pickup



Fixture ID Recognition



Fixture ID Recognition

By installing a sensor that recognizes the FIXTURE ID, it is possible to verify whether the appropriate jig is installed, preventing operator mistakes.

nDPL-TW(SW)
Depanelist



Special Features



Sawing System




Twin Tables



Dual Dust Removal



Dual Transfer



Vision System



Auto Conveyor Width



Tooling ID Recognition

Options



Shuttle Pallet



Edge Belt



Pallet Transport



Tray Function



NG Conveyor



Post Clean

TWIN Table In-Line Sawing

iDPL-TW(SW)
Depanelist



Special Features



Sawing System



Twin Tables



Dual Dust Removal




Dual Transfer



Vision System



Auto Conveyor Width



Tooling ID Recognition

Options



Shuttle Pallet




Edge Belt



Pallet Transport



Tray Function




NG Conveyor



Post Clean

Sawing System

By utilizing the sawing system, it is suitable for PCBs with a long-line cutting design and uses a diamond-coated saw blade for cutting.

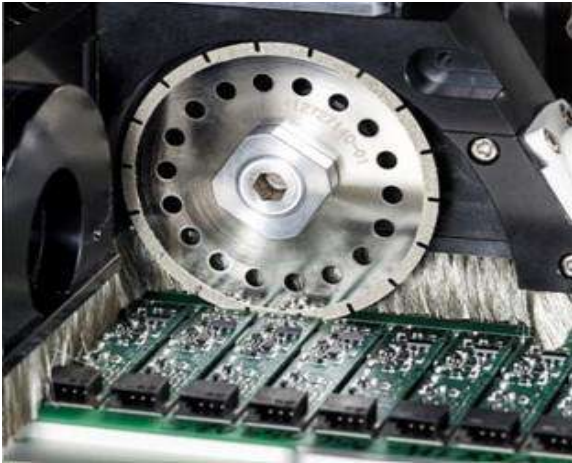

iDPL-TW(SW)
Depanelist



Special Features



Sawing System



Twin Tables



Dual Dust Removal



Dual Transfer



Vision System



Auto Conveyor Width



Tooling ID Recognition

Options



Shuttle Pallet




Edge Belt



Pallet Transport



Tray Function



NG Conveyor



Post Clean



Twin Tables or Single Table

Provide Twin Table for Minimizing Idle Time.

iDPL-TW(SW)
Depanelist



nDPL-TmDPL-TnDPL-ScDPL-SiDPL-TiDPL-SiDPL-UiDPL-CiDPL-DnDPL-TWiDPL-TWLS-NUN-T2Dust Collector

Special Features



Sawing System



Twin Tables



Dual Dust Removal



Dual Transfer



Vision System



Auto Conveyor Width



Tooling ID Recognition

Options



Shuttle Pallet




Edge Belt



Pallet Transport



Tray Function



NG Conveyor



Post Clean



Dual Simultaneous Dust Removal

Perfect dust removal is achieved through simultaneous upper and lower dust suction.

iDPL-TW(SW)
Depanelist



Special Features



Sawing System



Twin Tables



Dual Dust Removal



Dual Transfer



Vision System



Auto Conveyor Width



Tooling ID Recognition

Options



Shuttle Pallet




Edge Belt



Pallet Transport



Tray Function



NG Conveyor



Post Clean



Dual Transfer (Individual Loader & Unloader)

Cartridge type vacuum ports are applied to the loader and unloader, enabling quick and easy model changes.

- *Fast One-Touch Changeover
- **Standard: Vacuum Nozzle
- **Mechanical Gripper Available(Optional)

iDPL-TW(SW)
Depanelist



Special Features



Sawing System




Twin Tables



Dual Dust Removal



Dual Transfer



Vision System



Auto Conveyor Width



Tooling ID Recognition

Options



Shuttle Pallet




Edge Belt



Pallet Transport




Tray Function



NG Conveyor



Post Clean

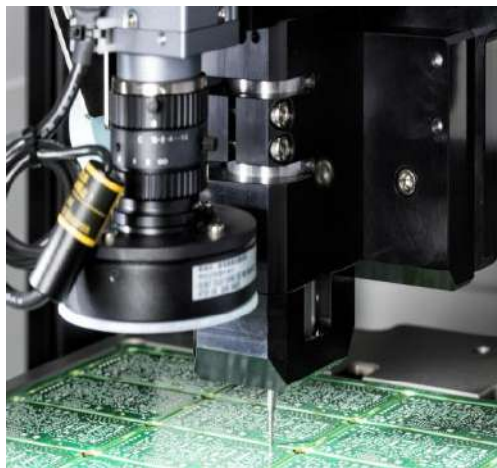

Vision System for Fiducial Check

By using the vision system, fiducial mark check is available

iDPL-TW(SW)
Depanelist



Special Features



Sawing System



Twin Tables



Dual Dust Removal



Dual Transfer



Vision System



Auto Conveyor Width



Tooling ID Recognition

Options



Shuttle Pallet




Edge Belt



Pallet Transport



Tray Function



NG Conveyor



Post Clean



Auto Input Conveyor Width Adjust

Using motors, width values are stored to reduce model changeover time. Also, the purpose of buffer can be achieved.

iDPL-TW(SW)
Depanelist



nDPL-T

mDPL-T

nDPL-S

cDPL-S

iDPL-T

iDPL-S

iDPL-U

iDPL-C

iDPL-D

nDPL-TW

iDPL-TW

LS-NUN-T2

Dust Collector

Special Features



Sawing System



Twin Tables



Dual Dust Removal



Dual Transfer



Vision System



Auto Conveyor Width



Tooling ID Recognition

Options



Shuttle Pallet




Edge Belt



Pallet Transport



Tray Function



NG Conveyor



Post Clean



Tooling ID Recognition

By using tooling ID recognition, incorrect tooling assembly can be prevented.

*Standard: 3 Sensors

iDPL-TW(SW)
Depanelist



nDPL-T

mDPL-T

nDPL-S

cDPL-S

iDPL-T

iDPL-S

iDPL-U

iDPL-C

iDPL-D

nDPL-TW

iDPL-TW

LS-NUN-T2

Dust Collector

Special Features



Sawing System



Twin Tables



Dual Dust Removal



Dual Transfer



Vision System



Auto Conveyor Width



Tooling ID Recognition

Options



Shuttle Pallet




Edge Belt



Pallet Transport



Tray Function



NG Conveyor



Post Clean



Shuttle Pallet Outlet

PCBs are released by placing them on the shuttle jig for automation of the next equipment. To ensure proper placement, a PCB detection sensor is installed.

iDPL-TW(SW)
Depanelist



Special Features



Sawing System



Twin Tables



Dual Dust Removal



Dual Transfer



Vision System



Auto Conveyor Width



Tooling ID Recognition

Options



Shuttle Pallet




Edge Belt



Pallet Transport



Tray Function



NG Conveyor



Post Clean



Edge Belt Conveyor Outlet

Cut PCBs can be disposed of via the edge belt conveyor outlet to the next machine. Additionally, auto width adjustment is applied to match the PCB size.

iDPL-TW(SW)
Depanelist



Special Features



Sawing System



Twin Tables



Dual Dust Removal




Dual Transfer



Vision System



Auto Conveyor Width



Tooling ID Recognition

Options



Shuttle Pallet




Edge Belt



Pallet Transport



Tray Function



NG Conveyor



Post Clean



Pallet Transport System

After cutting, the PCB is released and seated on the AL(Aluminum) pallet provided by the customer.

iDPL-TW(SW)
Depanelist



Special Features



Sawing System



Twin Tables



Dual Dust Removal



Dual Transfer



Vision System



Auto Conveyor Width



Tooling ID Recognition

Options



Shuttle Pallet




Edge Belt



Pallet Transport



Tray Function



NG Conveyor



Post Clean

Auto Tray Function

The cut PCB is automatically loaded into a tray or slot box. When the tray or slot box is full, it is automatically changed and stacked.

*The purpose of multi buffer(1+2) can be achieved

**Elevator Axis for the tray exist



iDPL-TW(SW)
Depanelist



Special Features



Sawing System



Twin Tables



Dual Dust Removal



Dual Transfer



Vision System



Auto Conveyor Width



Tooling ID Recognition

Options



Shuttle Pallet



Edge Belt



Pallet Transport




Tray Function



NG Conveyor



Post Clean

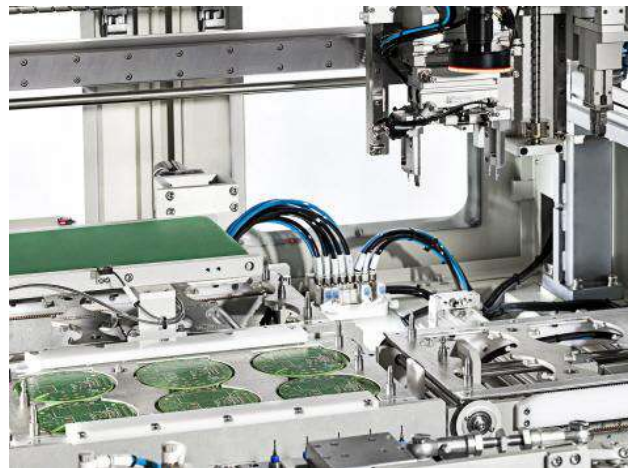

NG Conveyor for OK/NG Separation

Separating OK/NG PCBs to enhance production process efficiency.
Defective PCBs will be recorded in the MES.

iDPL-TW(SW)
Depanelist



nDPL-T

mDPL-T

nDPL-S

cDPL-S

iDPL-T

iDPL-S

iDPL-U

iDPL-C

iDPL-D

nDPL-TW

iDPL-TW

LS-NUN-T2

Dust Collector

Special Features



Sawing System



Twin Tables



Dual Dust Removal



Dual Transfer



Vision System



Auto Conveyor Width



Tooling ID Recognition

Options



Shuttle Pallet




Edge Belt



Pallet Transport



Tray Function



NG Conveyor



Post Clean



Post Cleaning System

By installing a separate Post Cleaner Chamber, dust can be minimized thanks to its ultra-ionizing system, which operates separate cleaning for the upper and bottom sides, significantly reducing the PCB defect rate.


iDPL-TW(SW)
Depanelist




Special Features



Laser Micromachining



2 Heads – 2 Tables



Operation Modes



Flying Optics



Process Versatility

Options




Various Laser Sources Available



Related Models



Fixture Types



Advanced Vision




Barcode Reader Available

LASER Cutting Off-Line Machine



Special Features



Laser Micromachining



2 Heads – 2 Tables



Operation Modes




Flying Optics



Process Versatility

Options




Various Laser Sources Available



Related Models




Fixture Types



Advanced Vision



Barcode Reader Available

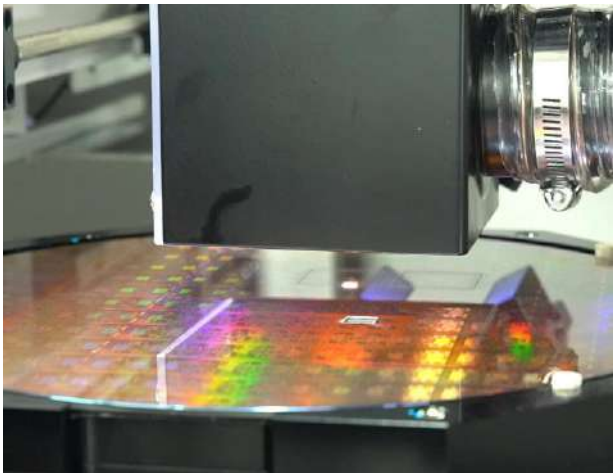

Precision-Controlled Non-Contact Laser Processing

Enables exceptional precision, flexibility, cleanliness, and stress-free operation (no vibration or warping), superior to conventional router methods such as bit and saw.

LS-NUN-T2


LIGHT
SABER



Special Features



Laser Micromachining



2 Heads – 2 Tables



Operation Modes




Flying Optics



Process Versatility

Options




Various Laser Sources
Available



Related Models




Fixture Types



Advanced Vision



Barcode Reader Available

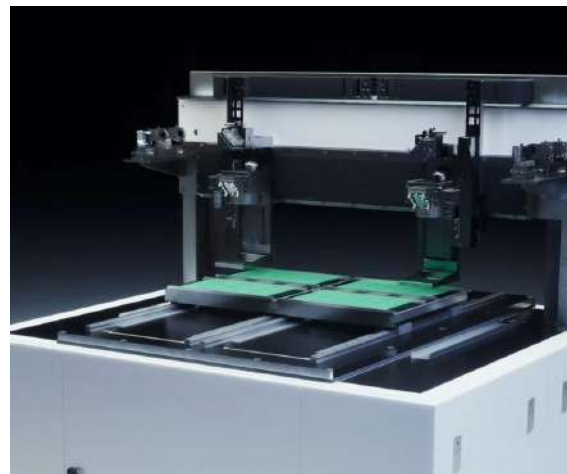

Innovative Concept: 2 Heads – 2 Tables – with 1 Laser Source

Maximized productivity and efficiency through groundbreaking dual-head operation.
(Patent Pending / Model: LS-NUN-T2)

LS-NUN-T2 LIGHT
SABER




Special Features



Laser Micromachining



2 Heads – 2 Tables



Operation Modes




Flying Optics



Process Versatility

Options




Various Laser Sources Available



Related Models




Fixture Types



Advanced Vision






Barcode Reader Available

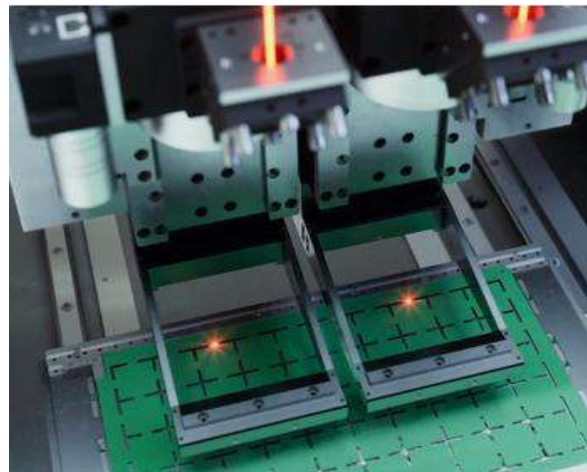

Versatile Operation Modes: Automatic, Manual

3 flexible process operation mode setting for optimal processing depending on your working environment:

- Single Mode
- Dual Mode
- Power Mode



- Vision camera scanning & instant cutting (Manual Mode)

LS-NUN-T2 LIGHT
SABER



Special Features




Laser Micromachining



2 Heads – 2 Tables



Operation Modes



Flying Optics



Process Versatility

Options




Various Laser Sources Available



Related Models




Fixture Types



Advanced Vision



Barcode Reader Available

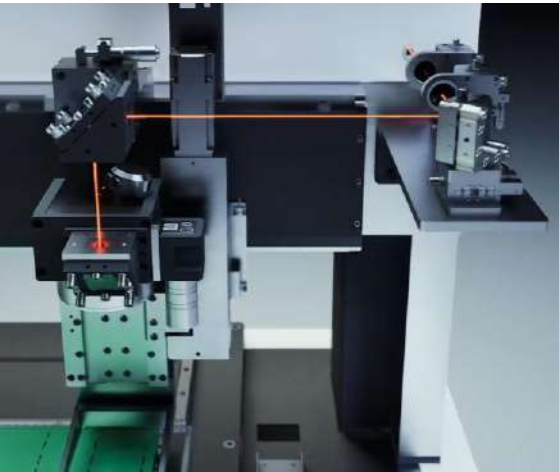

Fast Tact Time with Flying Optic Technology

Dual-head movement utilizing advanced flying optic mechanisms for enhanced processing speed.


LS-NUN-T2 LIGHT SABER



Special Features



Laser Micromachining



2 Heads – 2 Tables



Operation Modes



Flying Optics



Process Versatility

Options




Various Laser Sources Available



Related Models




Fixture Types



Advanced Vision



Barcode Reader Available

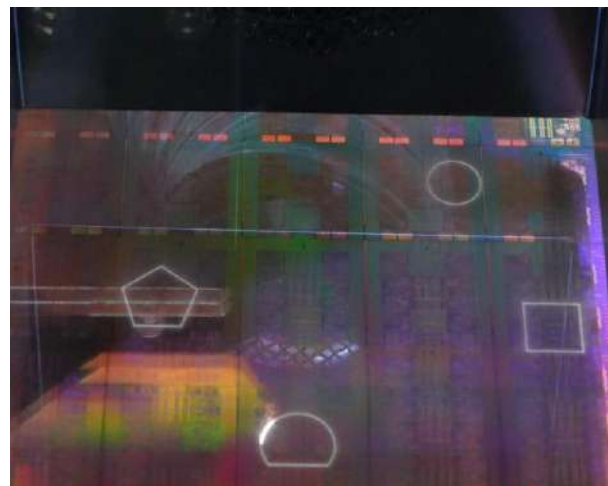

Exceptional Process Versatility via Adjustable User Parameters

- Supports various applications beyond full cutting, including Drilling, Grooving, Marking, and other related processes.
- Compatible with multiple materials using a single laser source


LS-NUN-T2 LIGHT
SABER



Special Features



Laser Micromachining



2 Heads – 2 Tables



Operation Modes




Flying Optics



Process Versatility

Options




Various Laser Sources Available



Related Models




Fixture Types



Advanced Vision



Barcode Reader Available

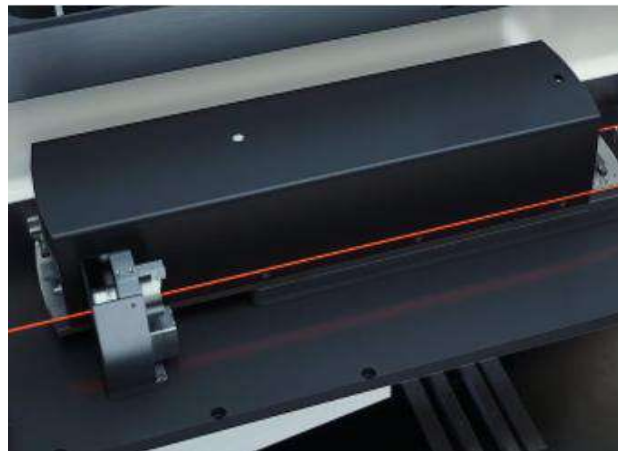

Various selection of Laser Sources depending on the application

- Wavelengths: UV, Green, IR, Fiber
- Pulse durations: Nano, Pico, Femto
- Applicable to diverse materials such as: Wafer, UTG, Glass, FR4, Metal, Ceramic, KAPTON, Film, etc.


LS-NUN-T2 LIGHT
SABER



Special Features



Laser Micromachining



2 Heads – 2 Tables



Operation Modes



Flying Optics



Process Versatility

Options




Various Laser Sources Available



Related Models



Fixture Types



Advanced Vision



Barcode Reader Available

Flexible configuration of heads and tables for efficiency

- 1 Head – 1 Table: LS-NUN
- 1 Head – 2 Tables: LS-NUN-T




LS-NUN-T2 LIGHT
SABER



Special Features



Laser Micromachining



2 Heads – 2 Tables



Operation Modes




Flying Optics



Process Versatility

Options




Various Laser Sources Available



Related Models



Fixture Types



Advanced Vision



Barcode Reader Available



Selectable fixture type (Stage/JIG) depending on the customer's demand

- Honeycomb Style
- Honeycomb with Magnetic Style Adjustment
- Dedicated Fixture (JIG)
- Specialized Type (ex. 300mm Wafer, etc..)

LS-NUN-T2 LIGHT
SABER



Special Features



Laser Micromachining



2 Heads – 2 Tables



Operation Modes




Flying Optics



Process Versatility

Options




Various Laser Sources Available



Related Models



Fixture Types




Advanced Vision



Barcode Reader Available

Optional advanced vision system for special purpose

- Advanced Light available
- Short-Wavelength IR Camera (SWIR) available

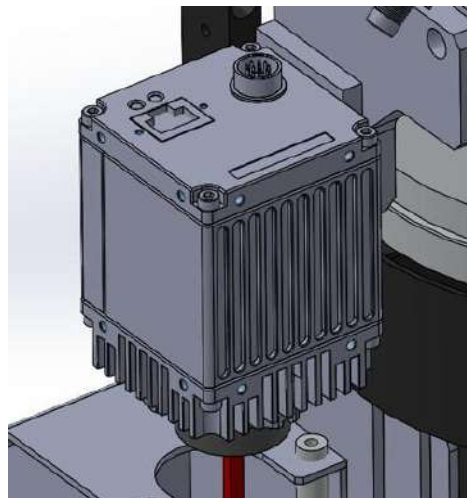

LS-NUN-T2 LIGHT
SABER



Special Features



Laser Micromachining



2 Heads – 2 Tables



Operation Modes



Flying Optics



Process Versatility

Options




Various Laser Sources Available



Related Models



Fixture Types



Advanced Vision



Barcode Reader Available



Bar Code Reader (BCR) available

Barcodes are recognized to perform MES functions and integrate efficiently with the customer's network.

LS-NUN-T2 LIGHT SAGE



Models



ECM-PB

2/3/5 HP Available

**Auto Air Pulsing for
Filter Cartridge shaking**

**Hepa Filter
Available(Optional)**

**Easy Handling by
Continuous liner type bag for
PB Type Dust Collector(Optional)**

