

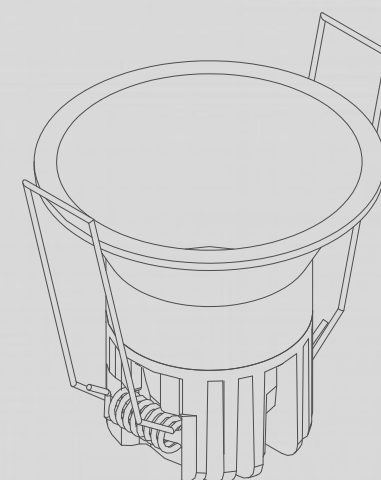


2026
Business card album

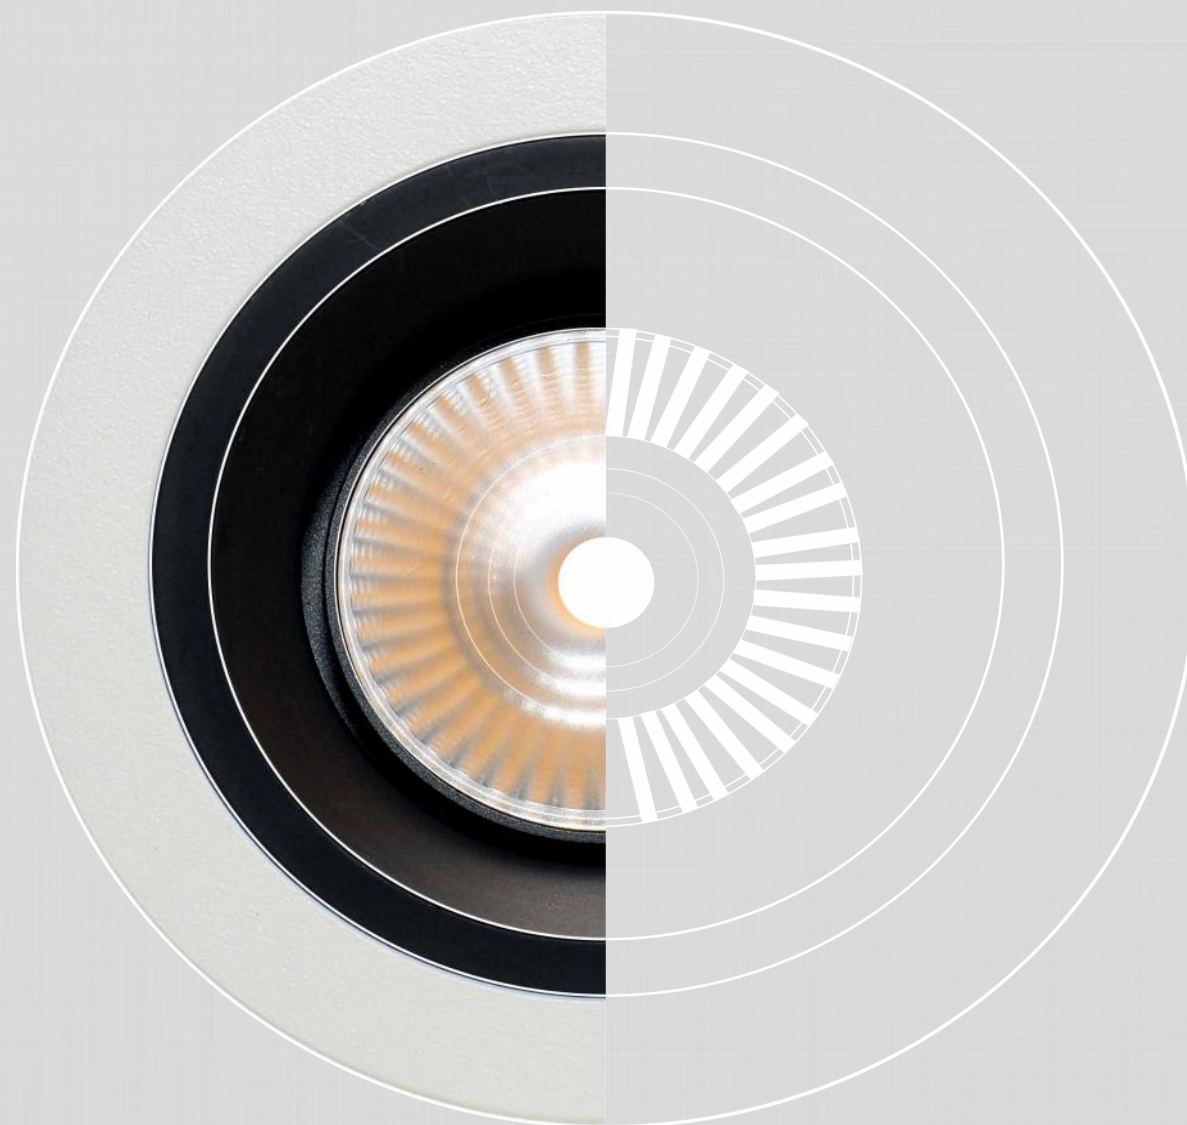

ONLY
FOR LINEAR



@Paralight




平行光集团

PARALIGHT GROUP CO., LIMITED

Wechat/Whatsapp:0086-18128259727

Email:inquiry@paralight.cc


<https://www.ledlinearfactory.com>

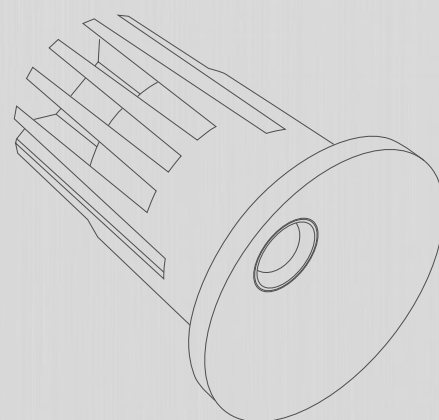


COMMERCIAL LIGHTING PRODUCT CATALOG

COMMERCIAL


Professional Solutions for Commercial Lighting

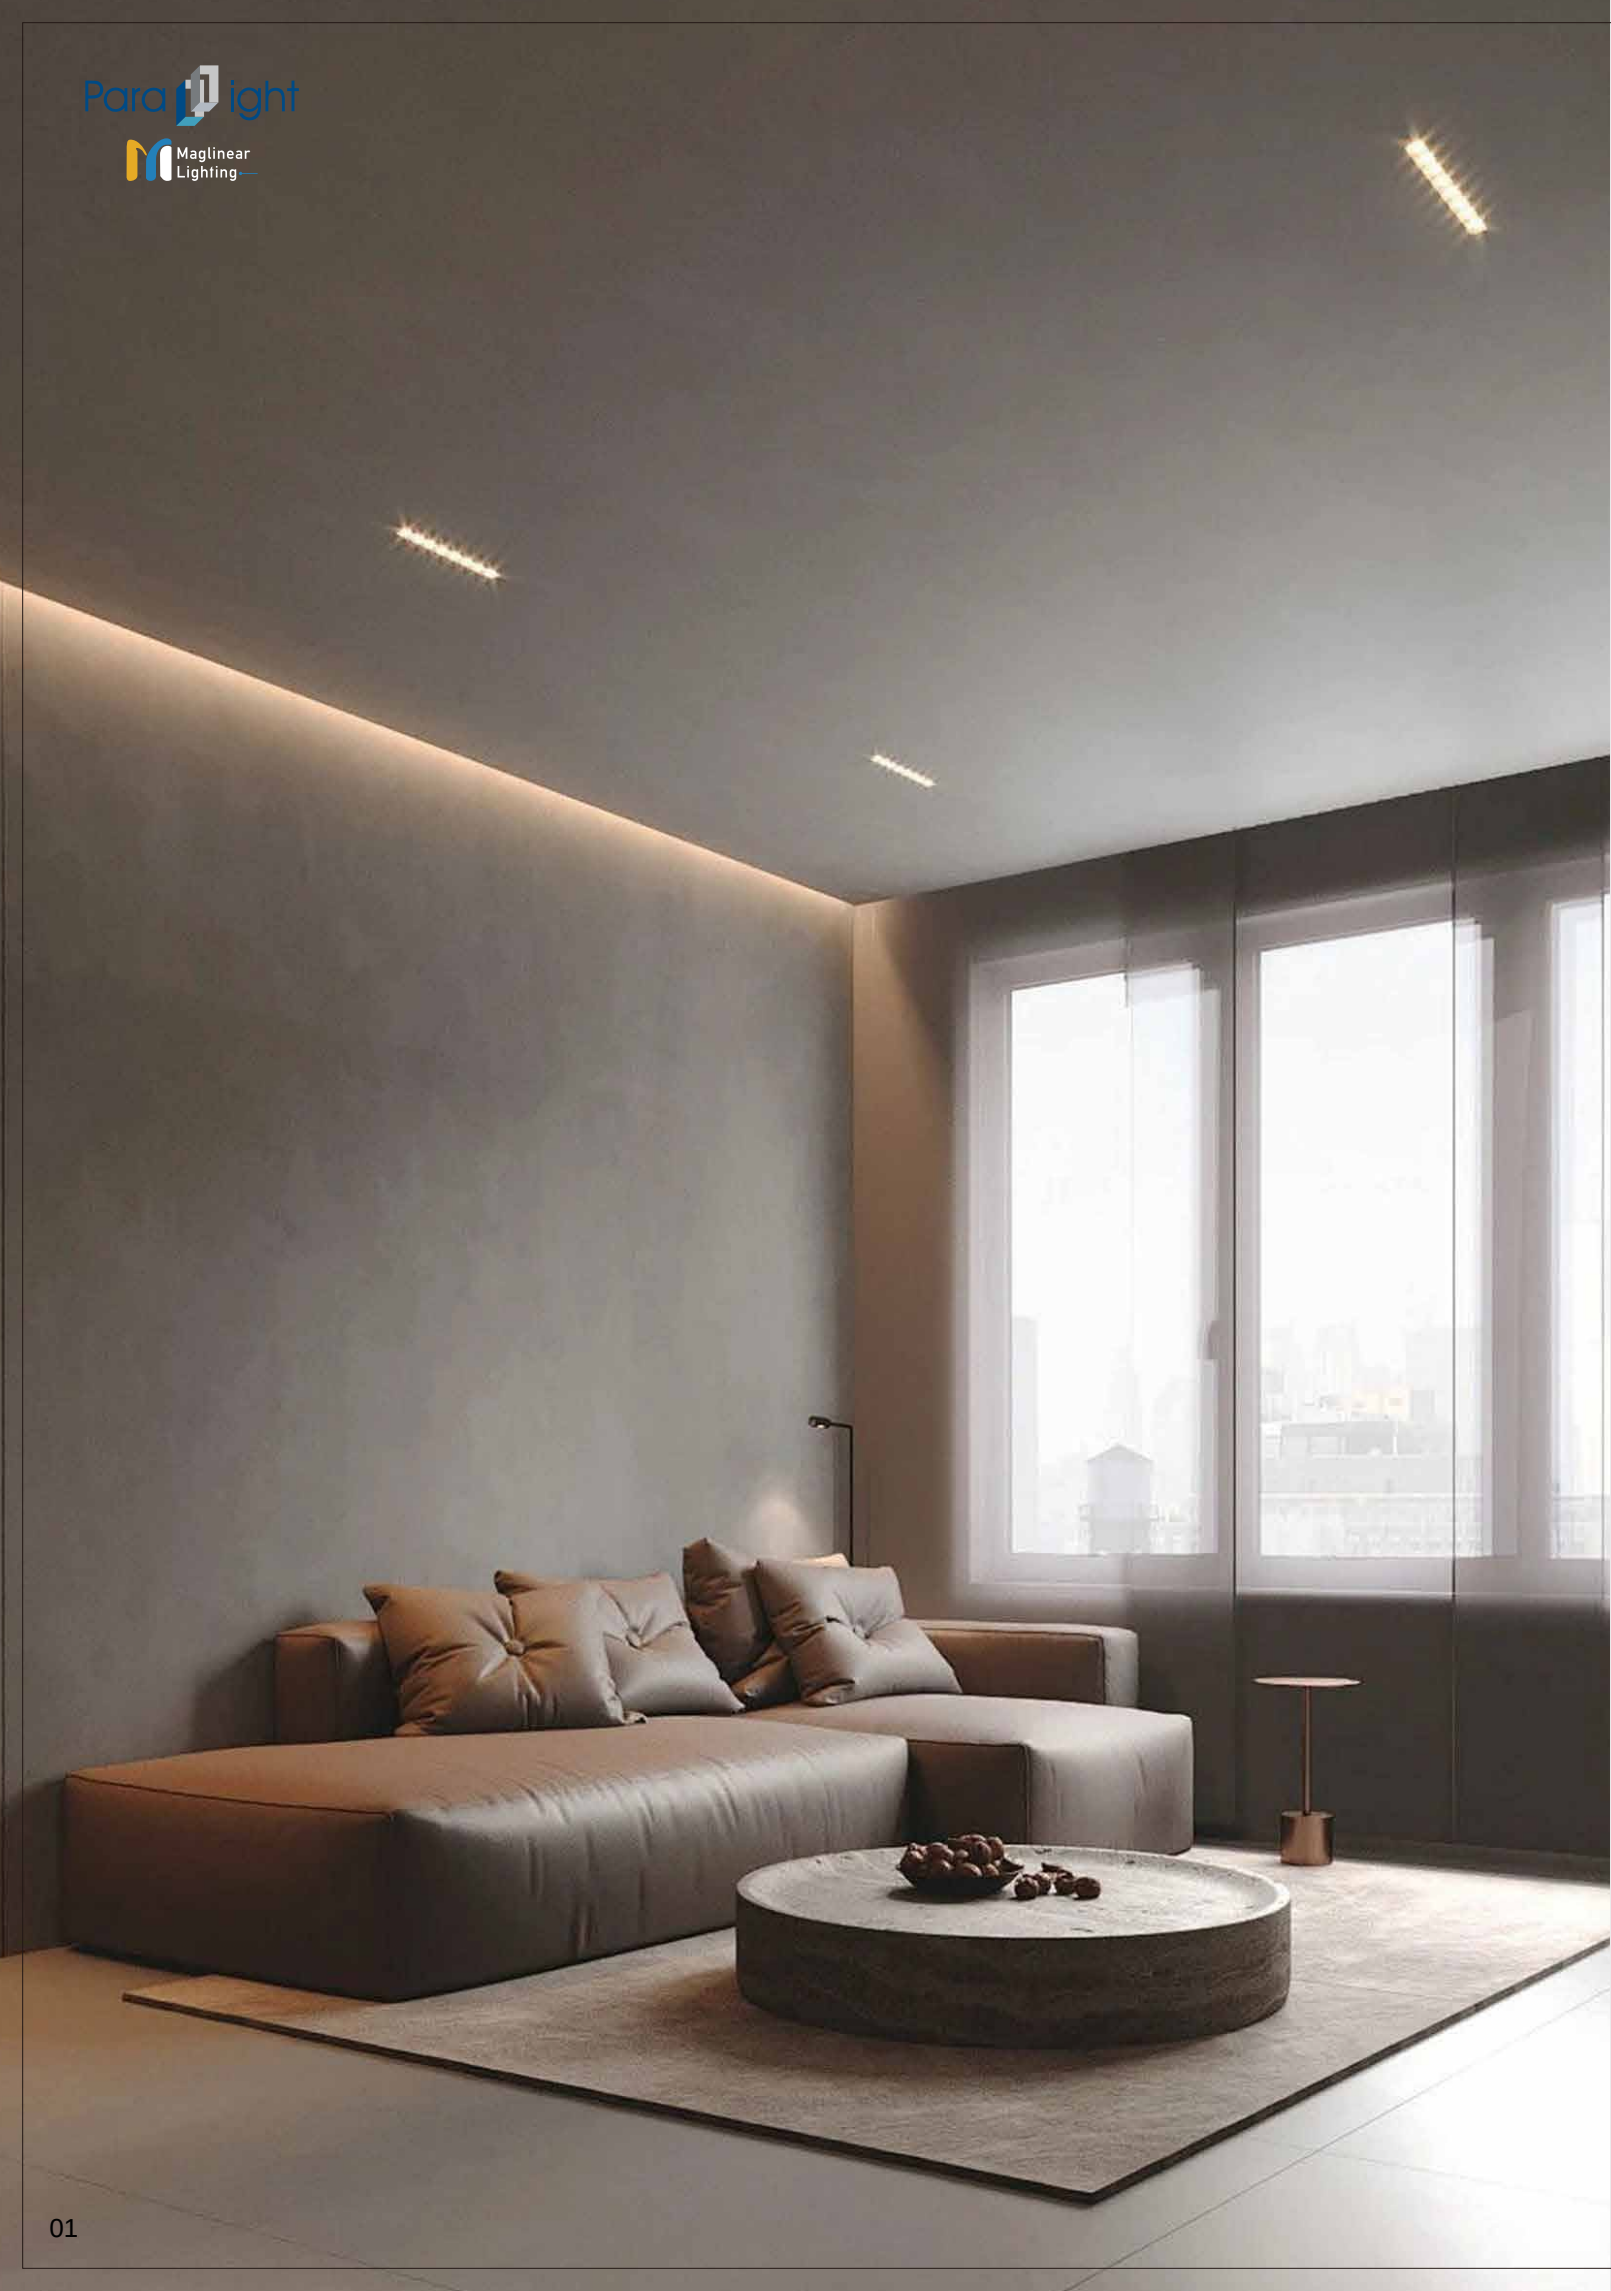

Ultra-Slim Recessed Linear Light



Product Specification



Model	Wattage	Dimensions	Cut-out Size	Voltage	Color	CRI	CCT	CCT	Beam Angle	Installation Method
MAG-EN-LB6-A	6W	W20*H28.5*L110mm	W16*L106	DC220-240V	Sandy White/Black	Ra≥90	3000K/4000K/6500K	3000K-6500K	45°	Recessed
MAG-EN-LB12-A	12W	W20*H28.5*L209mm	W16*L205	DC220-240V	Sandy White/Black	Ra≥90	3000K/4000K/6500K	3000K-6500K	45°	Recessed
MAG-EN-LB18-A	18W	W20*H28.5*L307mm	W16*L303	DC220-240V	Sandy White/Black	Ra≥90	3000K/4000K/6500K	3000K-6500K	45°	Recessed

Packaging Information

Model	Package Dimensions	Pcs per Package	Weight
MAG-EN-LB6-A	W160*L570*H295mm	50/PCS	
MAG-EN-LB12-A	W55*H55*L240mm	50/PCS	
MAG-EN-LB18-A	W55*H55*L340mm	50/PCS	

Ultra Slim Recessed Adjustable Linear Light



Product Specification

Model	Wattage	Dimensions	Cut-out Size	Voltage	Color	CRI	CCT	CCT	Beam Angle	Installation Method
MAG-EN-LB6-AZ	6W	W34*H28.5*L120mm	W26*L110	DC220-240V	Sandy White/Black	Ra≥90	3000K/4000K/6500K	3000K-6500K	45°	Recessed Adjustable
MAG-EN-LB12-AZ	12W	W34*H28.5*L218mm	W26*L210	DC220-240V	Sandy White/Black	Ra≥90	3000K/4000K/6500K	3000K-6500K	45°	Recessed Adjustable
MAG-EN-LB18-AZ	18W	W34*H28.5*L316mm	W26*L308	DC220-240V	Sandy White/Black	Ra≥90	3000K/4000K/6500K	3000K-6500K	45°	Recessed Adjustable

Packaging Information

Model	Package Dimensions	Pcs per Package	Weight
MAG-EN-LB6-A	W160*L570*H295mm	50/PCS	
MAG-EN-LB12-AZ	W55*H55*L240mm	50/PCS	
MAG-EN-LB18-AZ	W55*H55*L340mm	50/PCS	

Ultra Slim Frameless Recessed Linear Light



Product Specification

Model	Wattage	Dimensions	Cut-out Size	Voltage	Color	CRI	CCT	CCT	Beam Angle	Installation Method
MAG-EN-LB6-W	6W	W47*H42*L114mm	W26*L110	DC220-240V	Sandy White/Black	Ra≥90	3000K/4000K/6500K	3000K-6500K	45°	Recessed Adjustable
MAG-EN-LB12-W	12W	W34*H42*L212mm	W26*L210	DC220-240V	Sandy White/Black	Ra≥90	3000K/4000K/6500K	3000K-6500K	45°	Recessed Adjustable
MAG-EN-LB18-W	18W	W34*H42*L310mm	W26*L308	DC220-240V	Sandy White/Black	Ra≥90	3000K/4000K/6500K	3000K-6500K	45°	Recessed Adjustable

Packaging Information

Model	Package Dimensions	Pcs per Package	Weight
MAG-EN-LB6-W	W160*L570*H295mm	50/PCS	
MAG-EN-LB12-W	W55*H55*L240mm	50/PCS	
MAG-EN-LB18-W	W55*H55*L340mm	50/PCS	



30-LB Series Spot Light




MAG-30-LB1



MAG-30-LB4



MAG-30-LB9



Product Specification

Model	Wattage	Dimensions	Cut-out Size	Voltage	Color	CRI	CCT	CCT	Beam Angle	Installation Method
MAG-30-LB1	2W	W46*L46mm	W35*L35mm	DC220-240V	Sandy White/Black	Ra≥90	3000K/4000K/6500K	3000K-6500K	24°	Recessed
MAG-30-LB2	4W	W46*L68mm	W58*L35mm	DC220-240V	Sandy White/Black	Ra≥90	3000K/4000K/6500K	3000K-6500K	24°	Recessed
MAG-30-LB9	18W	W106*L106mm	W95*L95mm	DC220-240V	Sandy White/Black	Ra≥90	3000K/4000K/6500K	3000K-6500K	24°	Recessed

Packaging Information

Model	Package Dimensions	Pcs per Package	Weight
MAG-30-LB1		100/PCS	
MAG-30-LB2		100/PCS	
MAG-30-LB9		100PCS	

30-LB Series Spot Light



MAG-30-LB2



MAG-30-LB10



MAG-30-LB3




MAG-30-LB15



MAG-30-LB5

Product Specification





Model	Wattage	Dimensions	Cut-out Size	Voltage	Color	CRI	CCT	CCT	Beam Angle	Installation Method
MAG-30-LB2	4W	W46*L68mm	W58*L35mm	DC220-240V	Sandy White/Black	Ra≥90	3000K/4000K/6500K	3000K-6500K	24°	Recessed
MAG-30-LB3	6W	W46*L95mm	W85*L35mm	DC220-240V	Sandy White/Black	Ra≥90	3000K/4000K/6500K	3000K-6500K	24°	Recessed
MAG-30-LB5	10W	W148*L45mm	W136*L35mm	DC220-240V	Sandy White/Black	Ra≥90	3000K/4000K/6500K	3000K-6500K	24°	Recessed
MAG-30-LB10	20W	W282*L45mm	W270*L35mm	DC220-240V	Sandy White/Black	Ra≥90	3000K/4000K/6500K	3000K-6500K	24°	Recessed
MAG-30-LB15	30W	W414*L45mm	W402*L35mm	DC220-240V	Sandy White/Black	Ra≥90	3000K/4000K/6500K	3000K-6500K	24°	Recessed



Packaging Information

Model	Package Dimensions	Pcs per Package	Weight
MAG-30-LB2		50/PCS	
MAG-30-LB3		50/PCS	
MAG-30-LB5		50PCS	
MAG-30-LB10		50/PCS	
MAG-30-LB15		50/PCS	

BY Series Recessed Downlight






Product Specification

Model	Wattage	Dimensions	Cut-out Size	Voltage	Color	CRI	CCT	CCT	Beam Angle	Installation Method
MAG-BY-D45	10W	D56*H73mm	D45	DC220-240V	Sandy White/Black	Ra≥90	3000K/4000K/6500K	3000K-6500K	24°	Recessed
MAG-BY-D55	15W	D66*H77mm	D55	DC220-240V	Sandy White/Black	Ra≥90	3000K/4000K/6500K	3000K-6500K	24°	Recessed
MAG-BY-D75	20W	D86*H80mm	D75	DC220-240V	Sandy White/Black	Ra≥90	3000K/4000K/6500K	3000K-6500K	24°	Recessed

Packaging Information

Model	Package Dimensions	Pcs per Package	Weight
MAG-BY-D45	W160*L570*H295mm	50/PCS	
MAG-BY-D55	W55*H55*L240mm	50/PCS	
MAG-BY-D75	W55*H55*L340mm	50/PCS	

By Series Trimless Recessed Downlight



Product Specification






Model	Wattage	Dimensions	Cut-out Size	Voltage	Color	CRI	CCT	CCT	Beam Angle	Installation Method
MAG-BY-P-D45	10W	D56*H73mm	D45mm	DC220-240V	Sandy White/Black	Ra≥90	3000K/4000K/6500K	3000K-6500K	24°	Recessed
MAG-BY-P-D55	15W	D66*H77mm	D55mm	DC220-240V	Sandy White/Black	Ra≥90	3000K/4000K/6500K	3000K-6500K	24°	Recessed
MAG-BY-P-D75	20W	D86*H80mm	D75mm	DC220-240V	Sandy White/Black	Ra≥90	3000K/4000K/6500K	3000K-6500K	24°	Recessed

Packaging Information

Model	Package Dimensions	Pcs per Package	Weight
MAG-BY-P-D45		50/PCS	
MAG-BY-P-D55		50/PCS	
MAG-BY-P-D75		50/PCS	



CB Series Recessed Downlight



Product Specification

Model	Wattage	Dimensions	Cut-out Size	Voltage	Color	CRI	CCT	CCT	Beam Angle	Installation Method
MAG-CB-D75	10W	D86*H38mm	D75	DC220-240V	Sandy White/Black	Ra≥90	3000K/4000K/6500K	3000K-6500K	24°	Recessed
MAG-CB-D95	15W	D107*H46mm	D95	DC220-240V	Sandy White/Black	Ra≥90	3000K/4000K/6500K	3000K-6500K	24°	Recessed
MAG-CB-D120	20W	D133*H61mm	D120	DC220-240V	Sandy White/Black	Ra≥90	3000K/4000K/6500K	3000K-6500K	24°	Recessed

Packaging Information

Model	Package Dimensions	Pcs per Package	Weight
MAG-CB-D75		50/PCS	
MAG-CB-D95		50/PCS	
MAG-CB-D120		50/PCS	

JT Series Recessed Downlight



MAG-JT-D75-SMD



MAG-JT-D75-COB





MAG-JT-D75-COB+HB

Product Specification

Model	Wattage	Dimensions	Cut-out Size	Voltage	Color	CRI	CCT	CCT	Beam Angle	Installation Method
MAG-JT-D75-SMD	10W	D86*H44mm	D75	DC220-240V	Sandy White/Black	Ra≥90	3000K/4000K/6500K	3000K-6500K	110°	Recessed
MAG-JT-D95-SMD	15W	D110*H46mm	D95	DC220-240V	Sandy White/Black	Ra≥90	3000K/4000K/6500K	3000K-6500K	110°	Recessed
MAG-JT-D115-SMD	20W	D135*H51mm	D115	DC220-240V	Sandy White/Black	Ra≥90	3000K/4000K/6500K	3000K-6500K	110°	Recessed

Packaging Information

Model	Package Dimensions	Pcs per Package	Weight
MAG-JT-D75-SMD		50/PCS	
MAG-JT-D95-SMD		50/PCS	
MAG-JT-D115-SMD		50/PCS	

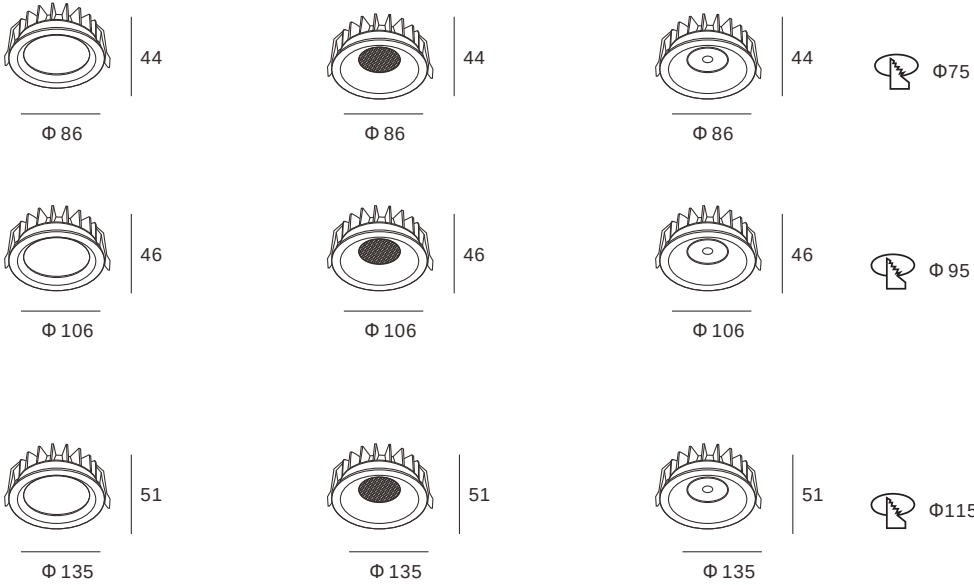

MAG-JT-D75-SMD

MAG-JT-D75-COB

MAG-JT-D75-COB+HB

Product Specification

Model	Wattage	Dimensions	Cut-out Size	Voltage	Color	CRI	CCT	CCT	Beam Angle	Installation Method
MAG-JT-D75-COB	10W	D86*H44mm	D75	DC220-240V	Sandy White/Black	Ra≥90	3000K/4000K/6500K	3000K-6500K	24°	Recessed
MAG-JT-D95-COB	15W	D110*H46mm	D95	DC220-240V	Sandy White/Black	Ra≥90	3000K/4000K/6500K	3000K-6500K	24°	Recessed
MAG-JT-D115-COB	20W	D135*H51mm	D115	DC220-240V	Sandy White/Black	Ra≥90	3000K/4000K/6500K	3000K-6500K	24°	Recessed

Packaging Information

Model	Package Dimensions	Pcs per Package	Weight
MAG-JT-D75-COB		50/PCS	
MAG-JT-D95-COB		50/PCS	
MAG-JT-D115-COB		50/PCS	

Product Specification


Model	Wattage	Dimensions	Cut-out Size	Voltage	Color	CRI	CCT	CCT	Beam Angle	Installation Method
MAG-JT-D75-COB+HB	10W	D86*H44mm	D75	DC220-240V	Sandy White/Black	Ra≥90	3000K/4000K/6500K	3000K-6500K	24°	Recessed
MAG-JT-D95-COB+HB	15W	D110*H46mm	D95	DC220-240V	Sandy White/Black	Ra≥90	3000K/4000K/6500K	3000K-6500K	24°	Recessed
MAG-JT-D115-COB+HB	20W	D135*H51mm	D115	DC220-240V	Sandy White/Black	Ra≥90	3000K/4000K/6500K	3000K-6500K	24°	Recessed

Packaging Information

Model	Package Dimensions	Pcs per Package	Weight
MAG-JT-D75-COB+HB		50/PCS	
MAG-JT-D95-COB+HB		50/PCS	
MAG-JT-D115-COB+HB		50/PCS	



DM Series Surface Downlight



Product Specification

Model	Wattage	Dimensions	Cut-out Size	Voltage	Color	CRI	CCT	CCT	Beam Angle	Installation Method
MAG-DM-D80	12W	D80*H85mm	/	DC220-240V	Sandy White/Black	Ra≥90	3000K/4000K/6500K	3000K-6500K	24°	Surface
MAG-DM-D100	18W	D100*H90mm	/	DC220-240V	Sandy White/Black	Ra≥90	3000K/4000K/6500K	3000K-6500K	24°	Surface
MAG-DM-D120	24W	D120*H100mm	/	DC220-240V	Sandy White/Black	Ra≥90	3000K/4000K/6500K	3000K-6500K	24°	Surface
MAG-DM-D150	35W	D150*H120mm	/	DC220-240V	Sandy White/Black	Ra≥90	3000K/4000K/6500K	3000K-6500K	24°	Surface
MAG-DM-D170	40W	D170*H130mm	/	DC220-240V	Sandy White/Black	Ra≥90	3000K/4000K/6500K	3000K-6500K	24°	Surface
MAG-DM-D200	45W	D200*H140mm	/	DC220-240V	Sandy White/Black	Ra≥90	3000K/4000K/6500K	3000K-6500K	24°	Surface

Packaging Information

Model	Package Dimensions	Pcs per Package	Weight
MAG-DM-D80		60/PCS	
MAG-DM-D100		60/PCS	
MAG-DM-D120		30/PCS	
MAG-DM-D150		24/PCS	
MAG-DM-D170		18/PCS	
MAG-DM-D200		12PCS	

LS Series Circular Extended Spotlight



Product Specification

Model	Wattage	Dimensions	Cut-out Size	Voltage	Color	CRI	CCT	CCT	Beam Angle	Installation Method
MAG-LS-D12	12W	D90*H85mm	D75	DC220-240V	Sandy White/Black	Ra≥90	3000K/4000K/6500K	3000K-6500K	24°	Recessed
MAG-LS-D18	18W	D110*H110mm	D95	DC220-240V	Sandy White/Black	Ra≥90	3000K/4000K/6500K	3000K-6500K	24°	Recessed
MAG-LS-D30	30W	D135*H130mm	D115	DC220-240V	Sandy White/Black	Ra≥90	3000K/4000K/6500K	3000K-6500K	24°	Recessed

Packaging Information

Model	Package Dimensions	Pcs per Package	Weight
MAG-LS-D12		50/PCS	
MAG-LS-D18		50/PCS	
MAG-LS-D30		50/PCS	

LS Series Square Extended Spotlight



Product Specification

Model	Wattage	Dimensions	Cut-out Size	Voltage	Color	CRI	CCT	CCT	Beam Angle	Installation Method
MAG-LS-W12	12W	D90*H90mm	W80*L80	DC220-240V	Sandy White/Black	Ra≥90	3000K/4000K/6500K	3000K-6500K	24°	Recessed
MAG-LS-W18	18W	D115*H115mm	W100*L100	DC220-240V	Sandy White/Black	Ra≥90	3000K/4000K/6500K	3000K-6500K	24°	Recessed
MAG-LS-W30	30W	D140*H140mm	W120*L120	DC220-240V	Sandy White/Black	Ra≥90	3000K/4000K/6500K	3000K-6500K	24°	Recessed

Packaging Information

Model	Package Dimensions	Pcs per Package	Weight
MAG-LS-W12		45/PCS	
MAG-LS-W18		30/PCS	
MAG-LS-W30		18/PCS	

LS Series Square Double Extended Spotlight




MAG-LS-W30-2



MAG-LS-W12-2




MAG-LS-W18-2



170




W80*L155



210



W100*L190



255



W100*L190

Product Specification

Model	Wattage	Dimensions	Cut-out Size	Voltage	Color	CRI	CCT	CCT	Beam Angle	Installation Method
MAG-LS-W12-2	12W*2	D90*H170mm	W80*L155	DC220-240V	Sandy White/Black	Ra≥90	3000K/4000K/6500K	3000K-6500K	24°	Recessed
MAG-LS-W18-2	18W*2	D115*H210mm	W100*L190	DC220-240V	Sandy White/Black	Ra≥90	3000K/4000K/6500K	3000K-6500K	24°	Recessed
MAG-LS-W30-2	30W*2	D140*H255mm	W120*L235	DC220-240V	Sandy White/Black	Ra≥90	3000K/4000K/6500K	3000K-6500K	24°	Recessed

Packaging Information

Model	Package Dimensions	Pcs per Package	Weight
MAG-LS-W12-2		18/PCS	
MAG-LS-W18-2		8/PCS	
MAG-LS-W30-2		6/PCS	


LS Series Square Triple-Head Extended SpotLight




MAG-LS-W12-3



MAG-LS-W18-3

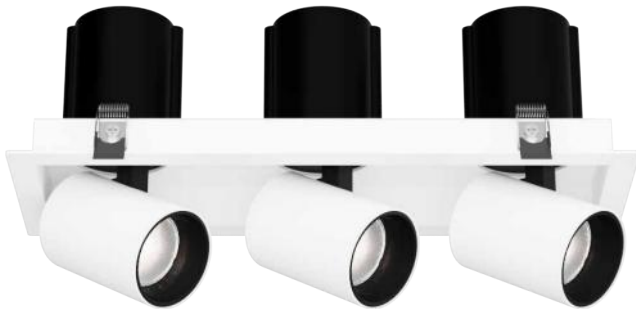


MAG-LS-W30-3



240




W100*L190



300



W100*L190



300



W100*L190

Product Specification

Model	Wattage	Dimensions	Cut-out Size	Voltage	Color	CRI	CCT	CCT	Beam Angle	Installation Method
MAG-LS-W12-3	12W*3	D90*H240mm	W80*L225	DC220-240V	Sandy White/Black	Ra≥90	3000K/4000K/6500K	3000K-6500K	24°	Recessed
MAG-LS-W18-3	18W*3	D115*H300mm	W100*L285	DC220-240V	Sandy White/Black	Ra≥90	3000K/4000K/6500K	3000K-6500K	24°	Recessed
MAG-LS-W30-3	30W*3	D140*H370mm	W120*L340	DC220-240V	Sandy White/Black	Ra≥90	3000K/4000K/6500K	3000K-6500K	24°	Recessed

Packaging Information


Model	Package Dimensions	Pcs per Package	Weight
MAG-LS-W12-2		16/PCS	
MAG-LS-W18-2		9/PCS	
MAG-LS-W30-2		6/PCS	



WUT Surface-Mounted Spotlight Series



MAG-WUT-225

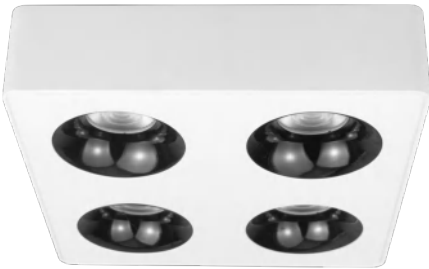


MAG-WUT-335




MAG-WUT-115




MAG-WUT-2252




225




115

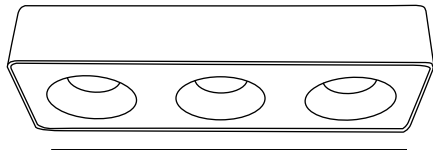

335



335




Product Specification

Model	Wattage	Dimensions	Voltage	Color	CRI	CCT	CCT	Beam Angle	Installation Method
MAG-WUT-115	12W	W115*L115*H55mm	DC220-240V	Sandy White/Black	Ra≥90	3000K/4000K/6500K	3000K-6500K	24°	Surface
MAG-WUT-225	12*2W	W225*L115*H55mm	DC220-240V	Sandy White/Black	Ra≥90	3000K/4000K/6500K	3000K-6500K	24°	Surface
MAG-WUT-335	12*3W	W335*L115*H55mm	DC220-240V	Sandy White/Black	Ra≥90	3000K/4000K/6500K	3000K-6500K	24°	Surface
MAG-WUT-2252	12*4W	W225*L225*H55mm	DC220-240V	Sandy White/Black	Ra≥90	3000K/4000K/6500K	3000K-6500K	24°	Surface

Packaging Information

Model	Package Dimensions	Pcs per Package	Weight
MAG-WUT-115		24/PCS	
MAG-WUT-225		16/PCS	
MAG-WUT-335		12/PCS	
MAG-WUT-2252		8/PCS	

CCK Series Deep Anti-Glare Spotlight




Product Specification

Model	Wattage	Dimensions	Cut-out Size	Voltage	Color	CRI	CCT	CCT	Beam Angle	Installation Method
MAG-CCK-D35	5W	D42*H65mm	D35	DC220-240V	Sandy White/Black	Ra≥90	3000K/4000K/6500K	3000K-6500K	24°	Recessed
MAG-CCK-D45	7W	D52*H68mm	D45	DC220-240V	Sandy White/Black	Ra≥90	3000K/4000K/6500K	3000K-6500K	24°	Recessed
MAG-CCK-D55	9W	D62*H83mm	D55	DC220-240V	Sandy White/Black	Ra≥90	3000K/4000K/6500K	3000K-6500K	24°	Recessed
MAG-CCK-D65	12W	D72*H95mm	D65	DC220-240V	Sandy White/Black	Ra≥90	3000K/4000K/6500K	3000K-6500K	24°	Recessed
MAG-CCK-D75	15W	D82*H100mm	D75	DC220-240V	Sandy White/Black	Ra≥90	3000K/4000K/6500K	3000K-6500K	24°	Recessed

Packaging Information

Model	Package Dimensions	Pcs per Package	Weight
MAG-CCK-D35		50/PCS	
MAG-CCK-D45		50/PCS	
MAG-CCK-D55		50/PCS	
MAG-CCK-D65		50/PCS	
MAG-CCK-D75		50/PCS	

UT Series Anti-Glare Spotlight



Product Specification

Model	Wattage	Dimensions	Cut-out Size	Voltage	Color	CRI	CCT	CCT	Beam Angle	Installation Method
MAG-UT-D55	5W	D62*H40mm	D55	DC220-240V	Sandy White/Black	Ra≥90	3000K/4000K/6500K	3000K-6500K	24°	Recessed
MAG-UT-D75	10W	D83*H50mm	D75	DC220-240V	Sandy White/Black	Ra≥90	3000K/4000K/6500K	3000K-6500K	24°	Recessed
MAG-UT-D95	15W	D104*H50mm	D95	DC220-240V	Sandy White/Black	Ra≥90	3000K/4000K/6500K	3000K-6500K	24°	Recessed

Packaging Information

Model	Package Dimensions	Pcs per Package	Weight
MAG-UT-D55		50/PCS	
MAG-UT-D75		50/PCS	
MAG-UT-D95		50/PCS	

GY Downlight Series






MAG-GY-D75



MAG-GY-D95



MAG-GY-D125



Product Specification

Model	Wattage	Dimensions	Cut-out Size	Voltage	Color	CRI	CCT	CCT	Beam Angle	Installation Method
MAG-GY-D55	10W	D88*H44mm	D75	DC220-240V	Sandy White/Black	Ra≥90	3000K/4000K/6500K	3000K-6500K	60°	Recessed
MAG-GY-D75	15W	D119*H44mm	D95	DC220-240V	Sandy White/Black	Ra≥90	3000K/4000K/6500K	3000K-6500K	60°	Recessed
MAG-GY-D125	20W	D149*H46mm	D125	DC220-240V	Sandy White/Black	Ra≥90	3000K/4000K/6500K	3000K-6500K	60°	Recessed

Packaging Information

Model	Package Dimensions	Pcs per Package	Weight
MAG-GY-D55		50/PCS	
MAG-GY-D75		50/PCS	
MAG-GY-D125		50/PCS	

